




SC SIMPLEX SM FEEDTHROUGH CONNECTOR

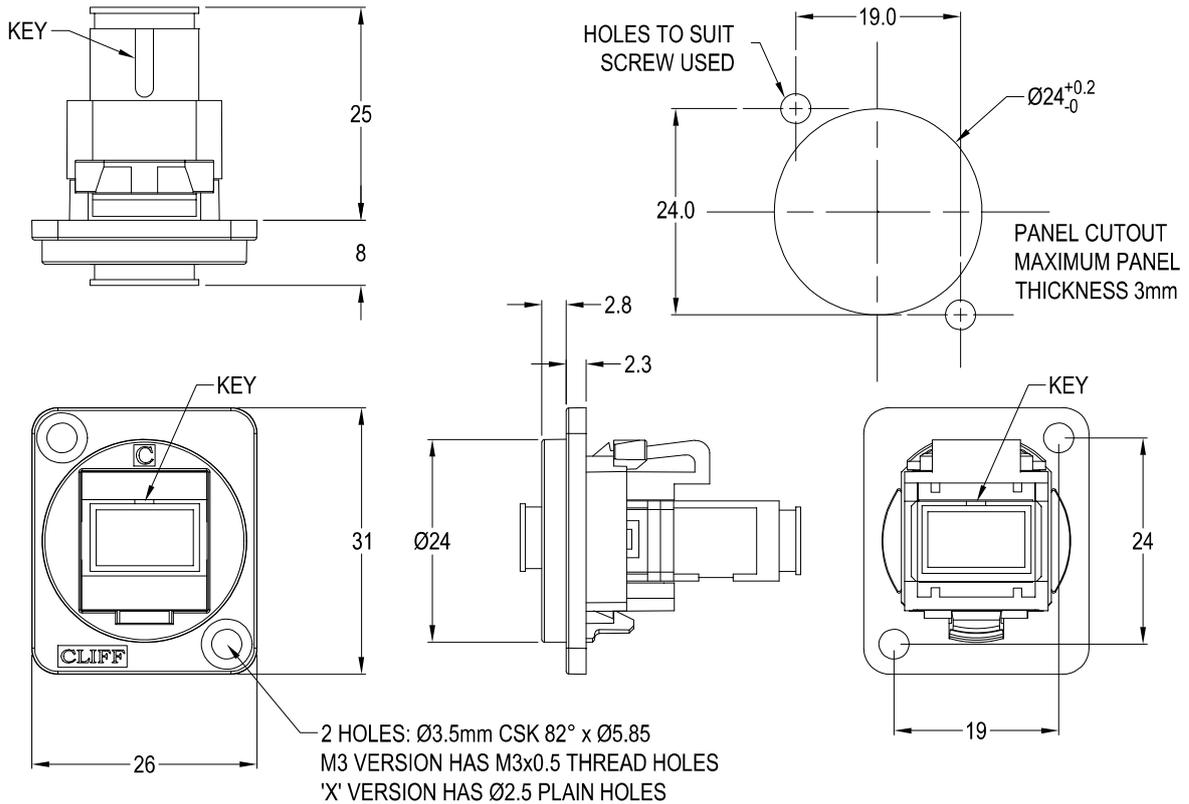

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

VARIANTS

Part No.	Description
CP30215	SC Simplex SM Black plastic frame, CSK holes
CP30215M	SC Simplex SM Nickel plated metal frame, CSK holes
CP30215M3	SC Simplex SM Nickel plated metal frame, M3 holes
CP30215MB	SC Simplex SM Black metal frame, CSK holes
CP30215M3B	SC Simplex SM Black metal frame, M3 holes
CP30215X	SC Simplex SM Black plastic frame, PLAIN holes

Material:

1. Coupler Body: ABS UL94 V-2 - Blue
2. Plastic Frame: PA66 UL94 V-2 - Black
3. Metal Frame: Diecast, Black or Nickel plated
4. Sleeve: Ceramic
5. Dust Cover: ABS - Black
6. Insert: ABS UL94 V-2 - Black

Notes:

1. Insertion Loss: ≤0.3dB
2. Dust caps may vary

