


PXEB5280 Datasheet

Product Name // 2 Channel Insert

 [View Product Page](#)

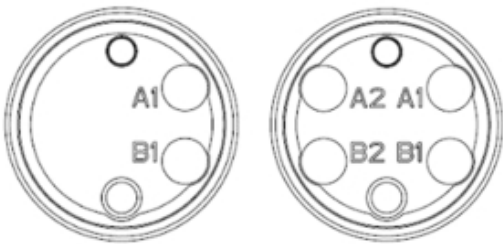

// Product Description:

- 2 Channel Insert
- Designed to MIL-DTL83526D
- Allows Plug, Jam Nut and Flange Mount to be re-terminated
- Ferrules (termini) included to terminate the Fiber
- Available in 4 Channel

// General Information:

Product Display Title:	2 Channel Insert
Product Family:	Circular Fiber Connectors
Product Series:	5000 Series Expanded Beam
Max Insertion Loss:	<2dB
Avg Insertion Loss:	<1.5dB
Contact Type:	Expanded Beam
Fibre Mode:	MM
Function:	Accessory
Max Operating Temperature:	+80°C
Min Operating Temperature:	-50°C
Rohs Compliant:	Yes

// Product PDF Links

 [5000 Series Expanded Beam Product...](#)

// Product 3D CAD Model Links

 [PXEB52803D CAD Model](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)