




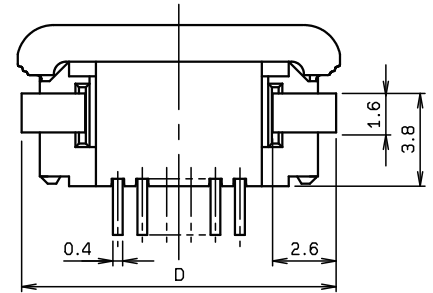
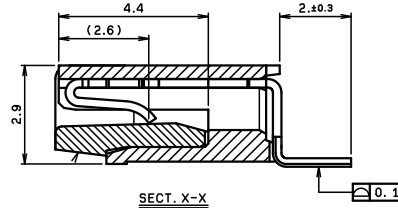



1.0mm Pitch
SERIES

6224

1.0mmピッチ RA SMT 上接点 スライドロック
1.0mmPitch RA SMT Top contact Slide lock






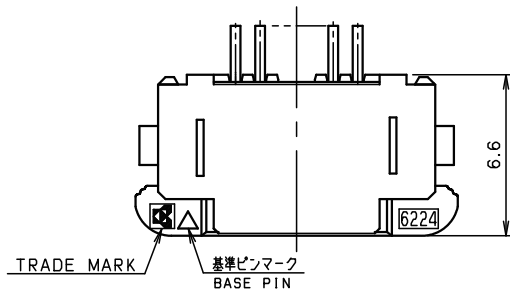


種類	公差	TOLERANCE
KIND	P	W M
FPC	±0.02	+0.07 -0.05 ±0.05
FFC	±0.05	±0.03 ±0.1

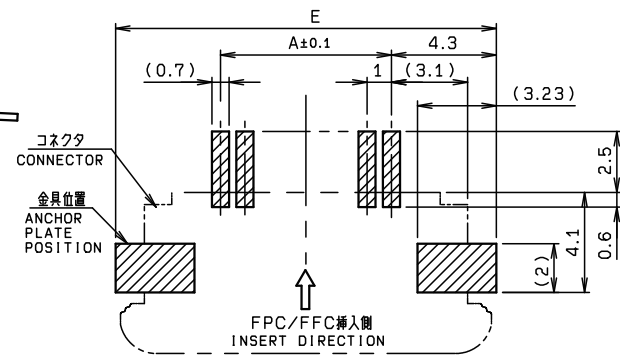

取付け基板寸法 (コネクタ搭載側)
MOUNTING LAYOUT

極数 NO. OF POS	A	B	C	D	E	X	Y	Z	Q
5	4.0	6.2	12.2	11.9	12.6	11.5	—	24.0	30.4
6	5.0	7.2	13.2	12.9	13.6	11.5	—	24.0	30.4
7	6.0	8.2	14.2	13.9	14.6	11.5	—	24.0	30.4
8	7.0	9.2	15.2	14.9	15.6	11.5	—	24.0	30.4
9	8.0	10.2	16.2	15.9	16.6	11.5	—	24.0	30.4
10	9.0	11.2	17.2	16.9	17.6	11.5	—	24.0	30.4
11	10.0	12.2	18.2	17.9	18.6	11.5	—	24.0	30.4
12	11.0	13.2	19.2	18.9	19.6	14.2	28.4	32.0	38.4
13	12.0	14.2	20.2	19.9	20.6	14.2	28.4	32.0	38.4
14	13.0	15.2	21.2	20.9	21.6	14.2	28.4	32.0	38.4
15	14.0	16.2	22.2	21.9	22.6	14.2	28.4	32.0	38.4
16	15.0	17.2	23.2	22.9	23.6	14.2	28.4	32.0	38.4
17	16.0	18.2	24.2	23.9	24.6	20.2	40.4	44.0	50.4
18	17.0	19.2	25.2	24.9	25.6	20.2	40.4	44.0	50.4
19	18.0	20.2	26.2	25.9	26.6	20.2	40.4	44.0	50.4
20	19.0	21.2	27.2	26.9	27.6	20.2	40.4	44.0	50.4
21	20.0	22.2	28.2	27.9	28.6	20.2	40.4	44.0	50.4
22	21.0	23.2	29.2	28.9	29.6	20.2	40.4	44.0	50.4
23	22.0	24.2	30.2	29.9	30.6	20.2	40.4	44.0	50.4
24	23.0	25.2	31.2	30.9	31.6	20.2	40.4	44.0	50.4
25	24.0	26.2	32.2	31.9	32.6	20.2	40.4	44.0	50.4
26	25.0	27.2	33.2	32.9	33.6	20.2	40.4	44.0	50.4
27	26.0	28.2	34.2	33.9	34.6	20.2	40.4	44.0	50.4
28	27.0	29.2	35.2	34.9	35.6	26.2	52.4	56.0	62.4
29	28.0	30.2	36.2	35.9	36.6	26.2	52.4	56.0	62.4
30	29.0	31.2	37.2	36.9	37.6	26.2	52.4	56.0	62.4

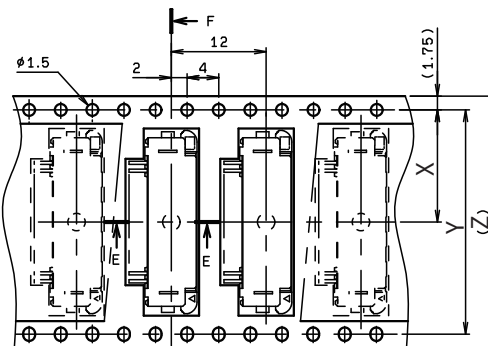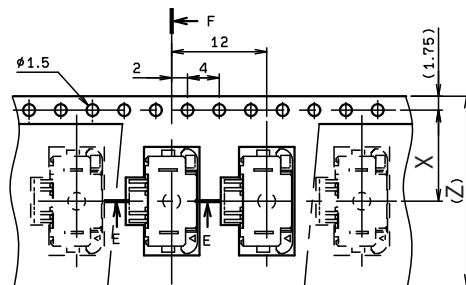

注文コード ORDERING CODE

08 6224 0XX 001 800+

RoHS 対応品

RoHS Compliant Product

極数 Number of positions

800+ : スズ銅めっき Sn-Cu Plated