

1217261-1 ✓ ACTIVE


TE Internal #: 1217261-1

3 Circuit Cluster Block, PBT, 22 – 10 AWG, .326 – 5.26 mm² Wire,
-20 – 120 °C [-4 – 248 °F]

[View on TE.com >](#)



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Cluster Blocks

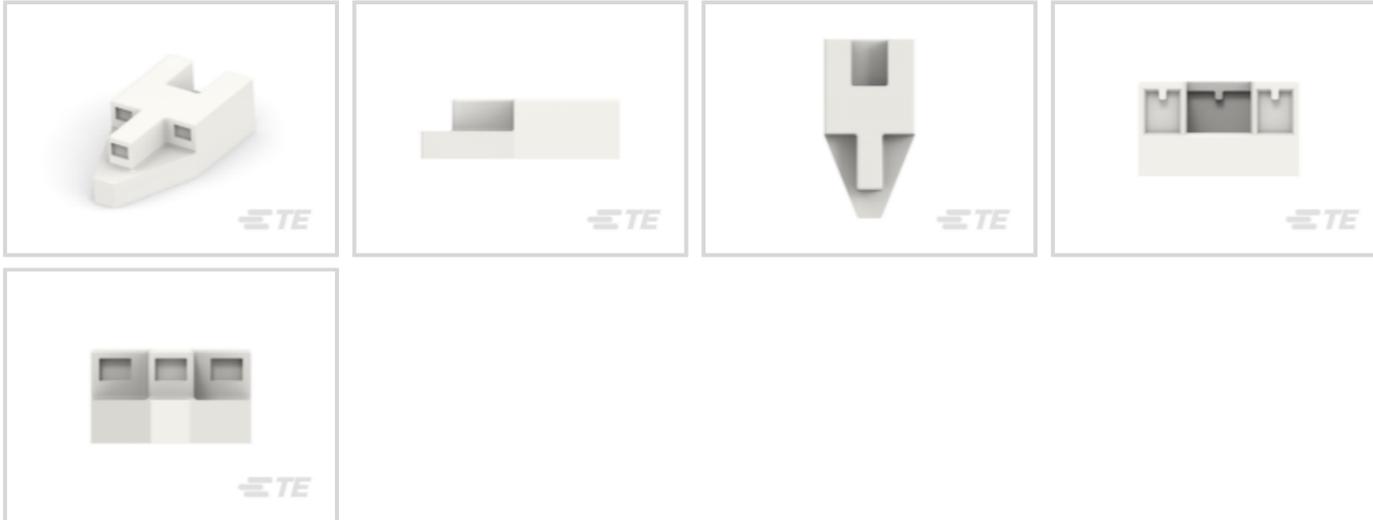

Number of Circuits: 3

Primary Product Material: PBT

Wire Size: .326 – 5.26 mm²

Operating Temperature Range: -20 – 120 °C [-4 – 248 °F]

Features

Product Type Features

Compatible With Discrete Wire Type

Lead Wire

Configuration Features

Number of Circuits

3

Body Features

Primary Product Color

Natural

Primary Product Material

PBT

Contact Features

Mating Pin Diameter

3.18 mm[.125 in]

Mechanical Attachment

Mount Diameter

20.7 mm[.815 in]

Block Mounting Configuration

1 Forward - 2 Back

Dimensions

Product Length

50.17 mm[1.97 in]

Wire Size

.326 – 5.26 mm²

Usage Conditions



| | |
|-----------------------------|---------------------------|
| Operating Temperature Range | -20 – 120 °C[-4 – 248 °F] |
|-----------------------------|---------------------------|

Packaging Features

| Packaging Method | Package |
|--------------------|---------|
| Packaging Quantity | 1 |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC |
| Halogen Content | Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| Solder Process Capability | Not applicable for solder process capability |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



Documents

Product Drawings

[HSG .125 CLUSTER BLOCK NAT](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1217261-1_K.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1217261-1_K.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1217261-1_K.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Magnet Wire Terminals & Splices](#)

English

Product Specifications

[Engineering Report](#)

English

Agency Approvals

[UL Report](#)

1217261-1

3 Circuit Cluster Block, PBT, 22 – 10 AWG, .326 – 5.26 mm² Wire, -20 – 120 °C [-4 – 248 °F]



English