

TE Internal #: 3-336369-5
Receptacle Terminal Housing, 1 Position, Straight, Black, UL 94V-0,
Nylon, Cable Mount (Free-Hanging), -40 – 105 °C [-40 – 221 °F],
FASTON 250

[View on TE.com >](#)



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Receptacle**
Connector & Housing Type: **Receptacle**
Number of Positions: **1**
Terminal Orientation: **Straight**
UL Flammability Rating: **UL 94V-0**

Features

Product Type Features

Sealable	No
Connector & Housing Type	Receptacle

Configuration Features

Number of Positions	1
---------------------	---

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

Terminal Type	Receptacle
Terminal Orientation	Straight
Contact Mating Retention	Without

Mechanical Attachment

Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)



Housing Features

Housing Material	Nylon
------------------	-------

Dimensions

Product Length	24.4 mm[.96 in]
----------------	-----------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
-----------------------------	----------------------------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	7500
--------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

TE Part # 2238173-3
250 FASTON,REC.,22-12 AWG,TPBR

Also in the Series | FASTON 250

Compression Connectors(4)	Crimp Terminal Housings(115)	Insertion & Extraction Tools(6)	Insulation Boots & Sleeves(16)
Magnet Wire Terminals(1)	PCB Terminals(133)	Quick Disconnects(412)	Splices(4)

Customers Also Bought

TE Part #BSA085F03580235000 923 PLUG	TE Part #5-104505-4 MTE PIN 22-26 AWG PLTD	TE Part #640259-1 058 PIN REC IS 18-22 010TP	TE Part #1-880488-1 FASTON 187 HOUSING RECEPTACLE



TE Part #5-963716-2
MQS0,63 Au tab LL unseal. 0,5-0,75




TE Part #5-1418760-2
MCON 1.2 LL TAB STC AU



TE Part #1-1437719-4
T01-0540-S05-FEMALE PLUG
CONNECTOR-CRIMP



TE Part #1624213-2
23SE 10KB 6.35X50FL B7 CAT

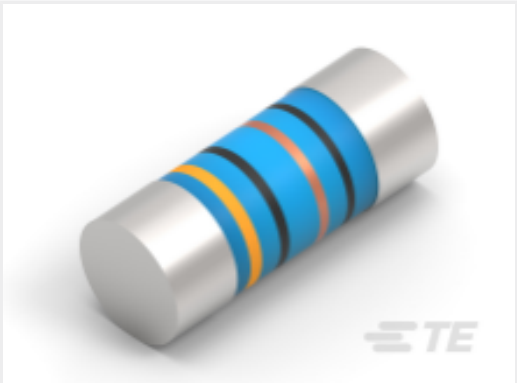

TE Part #7-2176315-0
MELF SMA_A 47K 1% 50PPM 0204 0.4
W



TE Part #2267074-2
PMS9P1B05M6RE

Documents

Product Drawings

250 FASTON HSG.,REC.,1 POS,BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-336369-5_E_c-3-336369-5-e.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-336369-5_E_c-3-336369-5-e.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-336369-5_E_c-3-336369-5-e.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

6,35 FASTON RECPTACLES AND TAB SLEEVES

English

Product Specification

English

Agency Approvals

UL Report

English

3-336369-5

Receptacle Terminal Housing, 1 Position, Straight, Black, UL 94V-0, Nylon, Cable Mount (Free-Hanging), -40 – 105 °C [-40 – 221 °F], FASTON 250



[UL Report](#)

English