

5050863-8 ✓ ACTIVE


TE Internal #: 5050863-8

6.6 mm [.26 in] Socket Length, 1.32 mm [.052 in] PCB Hole, Closed Bottom, .081 – .326 mm² Wire, 28 – 22 AWG, Cable-to-Board, Pin Sockets

[View on TE.com >](#)



Connectors > Socket Connectors > Pin Sockets > Miniature Spring Sockets: Closed Bottom, Beryllium Copper, 4A

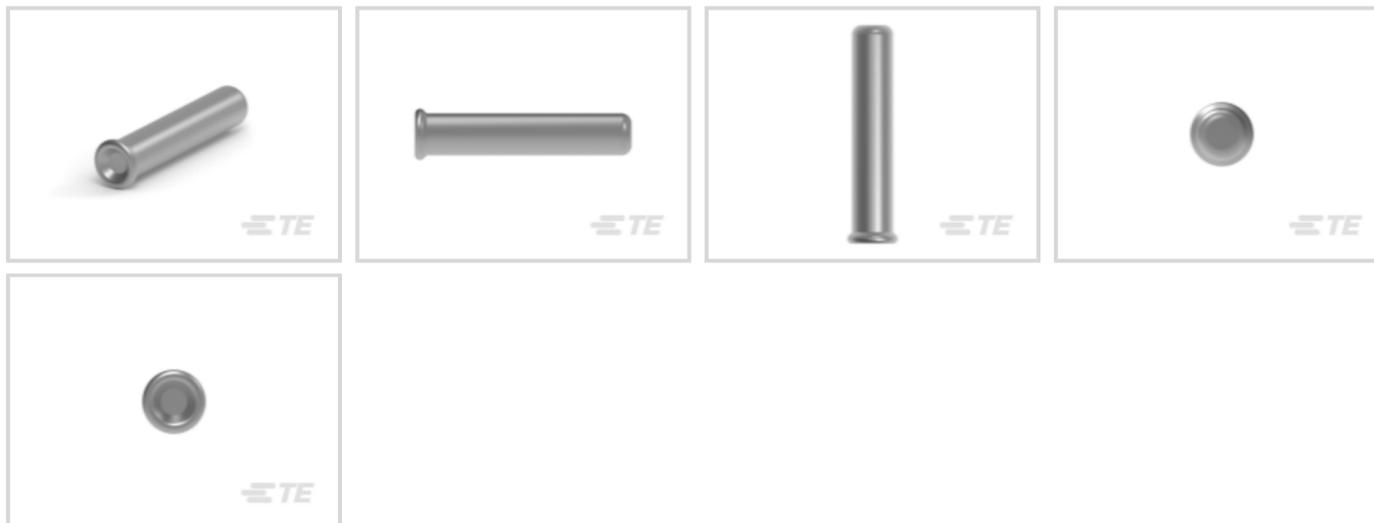

Socket Length: 6.6 mm [.26 in]

PCB Hole Diameter: 1.32 mm [.052 in]

Socket Sleeve Style: **Closed Bottom**

Wire Size: 28 – 22 AWG

[All Miniature Spring Sockets: Closed Bottom, Beryllium Copper, 4A \(13\)](#)

Features

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Socket Sleeve Style	Closed Bottom
Connector System	Cable-to-Board
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Body Features

Sleeve Plating Material	Tin
Sleeve Material	Copper

Contact Features

Contact Spring Plating Material	Tin
Contact Base Material	Beryllium Copper
Contact Mating Area Plating Material Thickness	2.54 µm
Contact Spring Plating Thickness	2.54 µm[30 µin]



Contact Current Rating (Max)	4 A
------------------------------	-----

Termination Features

Termination Method to PCB	Through Hole - Press-Fit
---------------------------	--------------------------

Termination Method to Wire & Cable	Solder
------------------------------------	--------

Insertion Method	Hand/Semi-Automatic
------------------	---------------------

Dimensions

PCB Thickness (Recommended)	.79 – 3.18 mm [.031 – .125 in]
-----------------------------	--------------------------------

Socket Length	6.6 mm [.26 in]
---------------	-----------------

PCB Hole Diameter	1.32 mm [.052 in]
-------------------	-------------------

Wire Size	28 – 22 AWG
-----------	-------------

Mating Pin Diameter Range	.36 – .66 mm [.014 – .026 in]
---------------------------	-------------------------------

Usage Conditions

Operating Temperature Range	-65 – 125 °C [-85 – 257 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Method	Bag, Loose Piece
------------------	------------------

Packaging Quantity	2000
--------------------	------

Other

Spring Material	Beryllium Copper
-----------------	------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
--	--

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC
-----------------	---

Free

Solder Process Capability

Pin-in-Paste capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-377-MSSKB65
Miniature Spring Sockets: Open Bottom, Beryllium Copper, 4A


Customers Also Bought



TE Part #BAT-HLD-001-TR
Hldr for CR2032 Battery, SMT, T&R Pkg



TE Part #BAT-HLD-001-THM
Battery Holder 2032 2025 THM Bulk Pack

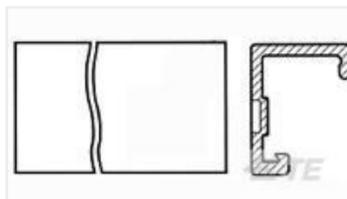

TE Part #640551-4
04P MTA156 COVER



TE Part #1393236-2
V23092-A1005-A301



TE Part #7-1625892-6
3W SM M/OX 5% 8K2



TE Part #1879355-2
RR03 5% 4K7 AMMO



TE Part #5-2176328-5
CRGP 1206 330K 1%



TE Part #5-2176339-7
CRGCO 0603 470K 1%



TE Part #2-5050871-3
SOCKET,MIN-SPR SN-AU SER-5



TE Part #5499913-3
A/L UNIV HDR 16P RA SHT LAT

Documents

Product Drawings

[SOCKET,MIN-SPR SN-SN SER-2](#)

English

CAD Files

Customer View Model

[ENG_CVM_5050863-8_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_5050863-8_O.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_5050863-8_O.2d_dxf.zip](#)

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Product Specification](#)

English