


LIF 2,5T638 R

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

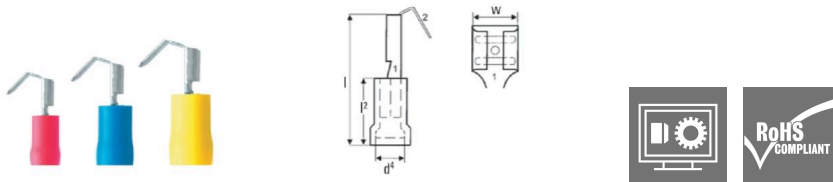

Insulated tab-connector sleeves with branch, made from PVC with copper sleeve

- Commercially available designs
- Not soldered
- With conical entry funnel

General ordering data

| | |
|------------|--|
| Version | cable lug, terminal end, Insulated cable connector, 1.5 mm ² - 2.5 mm ² , blue |
| Order No. | 9200620000 |
| Type | LIF 2,5T638 R |
| GTIN (EAN) | 40322484 10460 |
| Qty. | 100 items |

Technical data

Approvals

| | |
|------|---------|
| ROHS | Conform |
|------|---------|

Dimensions and weights

| | | | |
|------------|---------|----------------|-------------|
| Depth | 7.7 mm | Depth (inches) | 0.3031 inch |
| Width | 20.8 mm | Width (inches) | 0.8189 inch |
| Net weight | 1.32 g | | |

Environmental Product Compliance

| | |
|------------------------|-----------------------------|
| RoHS Compliance Status | Compliant without exemption |
| REACH SVHC | No SVHC above 0.1 wt% |

Technical data

| | |
|------------------------|--|
| Description of article | Flat-blade receptacle with branch, 1.5 - 2.5 mm ² |
|------------------------|--|

Connectors

| | | | |
|-------------------------------|--------------------------------|----------------------------------|---------------------|
| Conductor cross-section, max. | 2.5 mm ² | Conductor cross-section, min. | 1.5 mm ² |
| Insulation | Available, Partially insulated | Dimension (flat blade connector) | 6.3 x 0.8 mm |
| Dimension | 6.3 x 0.8 mm | Material/plastic | PVC |
| Identification colour | blue | Plug-in width (d2) | 6.3 mm |
| Plug-in density (d3) | 0.8 mm | Plastic collar length (b) | 10 mm |
| Plastic collar diameter (D) | 5.8 mm | | |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 8.0 | EC0005 16 | ETIM 9.0 | EC0005 16 |
| ETIM 10.0 | EC0005 16 | ECLASS 14.0 | 27-44-03-92 |
| ECLASS 15.0 | 27-44-03-92 | | |