

925016 ✓ ACTIVE

FASTIN-FASTON | FASTIN-FASTON 110

TE Internal #: 925016

Receptacle Terminal Housing, 4 Position, 5 mm [.2 in] Centerline,

Straight, Natural, UL 94V-2, Nylon, -40 – 105 °C [-40 – 221 °F],

FASTIN-FASTON 110

[View on TE.com >](#)



Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings



Terminal Type: **Receptacle**

Connector & Housing Type: **Receptacle**

Number of Positions: **4**

Terminal Orientation: **Straight**

UL Flammability Rating: **UL 94V-2**

Features

Product Type Features

Connector & Contact Terminates To Wire & Cable

Sealable No

Connector & Housing Type Receptacle

Configuration Features

Number of Positions 4

Body Features

Primary Product Color Natural

Contact Features

Terminal Type Receptacle

Terminal Orientation Straight

Contact Mating Retention Without

Mechanical Attachment

Mating Alignment Type Polarization



Mating Alignment With

Housing Features

Housing Material	Nylon
Centerline (Pitch)	5 mm [.2 in]

Dimensions

Product Length	18 mm [.71 in]
----------------	----------------

Usage Conditions

Operating Temperature Range	-40 – 105 °C [-40 – 221 °F]
-----------------------------	-----------------------------

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	5000
--------------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer






This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on

requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | FASTIN-FASTON 110

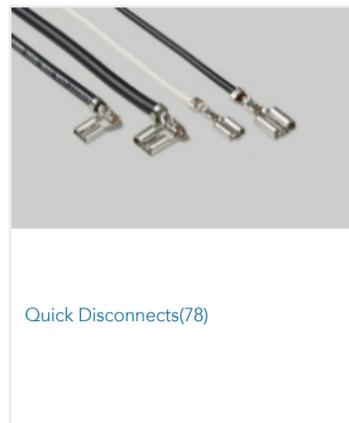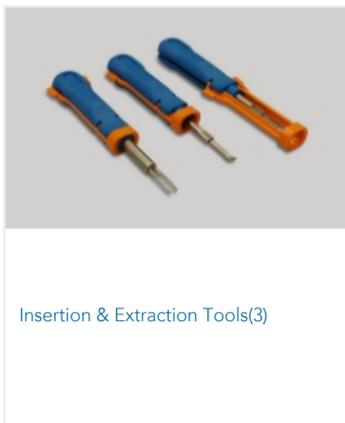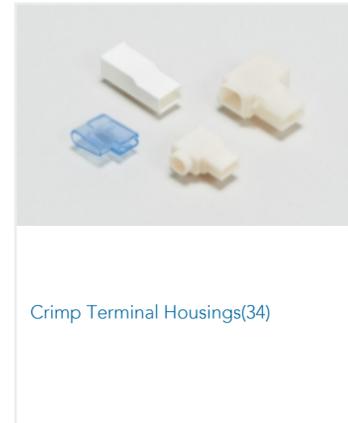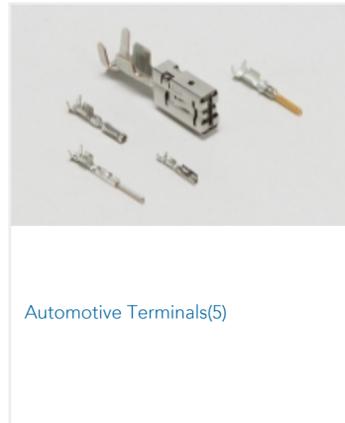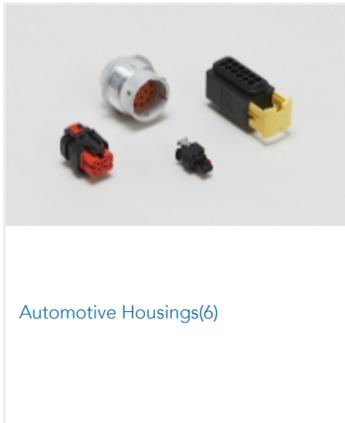

Customers Also Bought





TE Part #953318-2
1W HSG FOR DIESEL PLUG



TE Part #1544228-1
CLIP 8 MM NG1-1 PO



TE Part #1-2066502-4
COVER 2 POS MINI FUSE BOX, MAT-2



TE Part #2112228-1
PROTECTION CAP, TE



TE Part #2338360-1
2P ECONOSEAL RECEPTACLE ASSY



TE Part #2373835-1
2POS, MQS, REC HSG ASSY, SLD, COD A

Documents

Product Drawings

[4P FF .110 HOUSING REC PA66 NATURAL](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_925016_E.2d_dxf.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_925016_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_925016_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[FASTIN_FASTON_Product_Line](#)

English

[White Paper: Nylon Discoloration](#)

English

Product Specifications

[Application Specification](#)

English

925016

Receptacle Terminal Housing, 4 Position, 5 mm [.2 in] Centerline, Straight, Natural, UL
94V-2, Nylon, -40 – 105 °C [-40 – 221 °F], FASTIN-FASTON 110

