

3HPSGS1-NG

✓ ACTIVE

Corcom | Corcom HP

TE Internal #: 4-1609158-6

Power Entry Module, None Input, DPST, Complete Shield, Locking  
Socket & Shrouded Output & Switch Guard, 2 MOOP, Corcom HP,  
Power Entry Modules

[View on TE.com >](#)



EMI & EMC Solutions > IEC Inlets > Power Entry Modules > HP



Filter Type: **Power Entry Module**  
Input Voltage Selection: **None**  
Filter Switch Type: **DPST**  
Filter Shield Type: **Complete Shield**  
Device Safety Features: **Locking Socket & Shrouded Output & Switch Guard**

[All HP \(96\)](#)

Features

Product Type Features

|                         |                      |
|-------------------------|----------------------|
| Ground Choke Option     | No                   |
| Level Of Filtering      | Inductor & Capacitor |
| Filter Type             | Power Entry Module   |
| Filter Switch Type      | DPST                 |
| Output Termination Type | .187" FASTON         |
| Filtering Requirements  | Filtered             |
| Filter Connector Type   | IEC 60320-1 C-18     |

Configuration Features

|              |        |
|--------------|--------|
| Fuse Options | Single |
|--------------|--------|

Electrical Characteristics

|                                      |           |
|--------------------------------------|-----------|
| Input Voltage Selection              | None      |
| Leakage Current (Max) (120VAC, 60Hz) | 3 $\mu$ A |



|                                      |           |
|--------------------------------------|-----------|
| Leakage Current (Max) (250VAC, 50Hz) | 5 $\mu$ A |
| Current Rating                       | 3 A       |
| Operating Voltage                    | 250 VAC   |

Body Features

|                     |                 |
|---------------------|-----------------|
| Filter Shield Type  | Complete Shield |
| Product Orientation | Vertical        |

Mechanical Attachment

|                          |         |
|--------------------------|---------|
| Panel Mount Feature Type | Snap-In |
|--------------------------|---------|

Dimensions

|                               |                          |
|-------------------------------|--------------------------|
| Panel Thickness (Recommended) | 1 – 2 mm[.039 – .079 in] |
|-------------------------------|--------------------------|

Usage Conditions

|                             |                           |
|-----------------------------|---------------------------|
| Operating Temperature Range | -40 – 40 °C[-40 – 104 °F] |
|-----------------------------|---------------------------|

Operation/Application

|                          |                                                 |
|--------------------------|-------------------------------------------------|
| Device Safety Features   | Locking Socket & Shrouded Output & Switch Guard |
| Filter Mode of Operation | 2 MOOP                                          |

Industry Standards

|                                           |    |
|-------------------------------------------|----|
| Compatible With Agency/Standards Products | UL |
|-------------------------------------------|----|

Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | 有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2025 (250)<br>Candidate List Declared Against: JUNE 2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                                                  |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

3HPSGS1-NG

Power Entry Module, None Input, DPST, Complete Shield, Locking Socket & Shrouded Output & Switch Guard, 2 MOOP, Corcom HP, Power Entry Modules




This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-F49-H  
HP

Also in the Series | Corcom HP

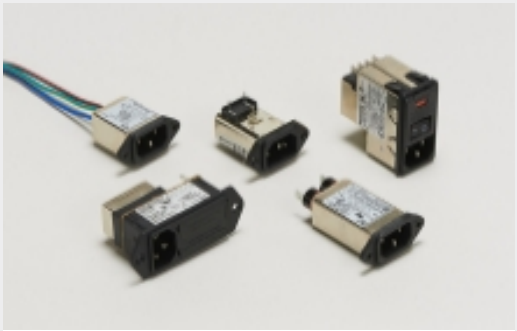

Medical Power Entry Modules(96)



Power Entry Modules(96)

Customers Also Bought



TE Part #DT04-2P  
REC, 2P, GRY, N



TE Part #1-1703498-1  
2POS, MCON 1.2 LL TAB SEALED  
COD A

Documents

Product Drawings  
3HPSGS1-NG=F8512  
English





CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_4-1609158-6\_1.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_4-1609158-6\_1.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_4-1609158-6\_1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

HP SERIES EMI FILTERS

English

Corcom HP series EMI PEM Filters

English

Agency Approvals

UL

English