


PF0033/20/63 Datasheet

Product Name // IEC Connector Snap Fit To Panel Twin
Fused Inlet PF0033 Series 2mm Panel 6.3mm Tab
Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)



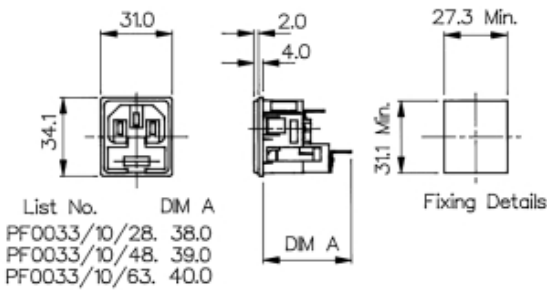

List No.	DIM A
PF0033/10/28.	38.0
PF0033/10/48.	39.0
PF0033/10/63.	40.0

// Product Description:

- Snap Fit Panel Mount Twin Fused IEC Inlets
 - EN60 320-1 Standard Sheet C14 Class I
 - Twin Fused, 5mm x 20mm fuses
 - Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm
- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
 - Insulation Boot for rear of connector available separately (part code 14317)
 - Mate with PX0587, PX0587/SE, PX0588

// General Information:

Product Display Title:	Snap Fit Panel Mount Twin Fused IEC Inlets
Product Family:	IEC Connectors
Product Series:	IEC60320 Main Inlets and Outlets
Approvals:	CSA
Body Material:	Nylon 66
Current Max:	10A
Flamability Rating:	UL94V-0
Function:	Panel Mount Fused Connector
Iec Connector Mates With:	PX0587,PX0587/SE,PX0588
Iec En60620 Type:	EN60 320-1 Standard Sheet C14 Class I
Max Operating Temperature:	+70°C
Min Operating Temperature:	-20°C
Max Panel Thickness:	2mm
Min Panel Thickness:	2mm
Number Of Contacts:	3 Contacts
Rohs Compliant:	Yes
Voltage Max:	250V

// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PF0033/20/633D CAD Model](#)

// Product Certificate Links

 [CE Certificate](#)



Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)