


PF0033/30/63 Datasheet

Product Name // IEC Connector Snap Fit To Panel Twin
Fused Inlet PF0033 Series 3mm Panel 6.3mm Tab
Termination EN60 320-1 Standard Sheet C14 Class I

 [View Product Page](#)



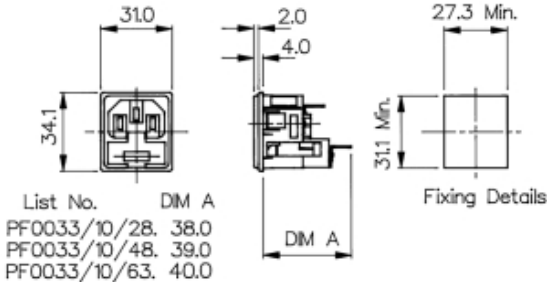

List No.	DIM A
PF0033/10/28.	38.0
PF0033/10/48.	39.0
PF0033/10/63.	40.0

// Product Description:

- Snap Fit Panel Mount Twin Fused IEC Inlets
- EN60 320-1 Standard Sheet C14 Class I
- Twin Fused, 5mm x 20mm fuses
- Choice of panel thickness depending on part code: /10 - 1mm, /15 - 1.5mm, /20 - 2mm, /30 - 3mm

- Choice of Termination depending on part code: /28 - 2.8mm Solder Tag, /48 - 4.8mm Tab, /63 - 6.3mm Tab
- Insulation Boot for rear of connector available separately (part code 14317)
- Mate with PX0587, PX0587/SE, PX0588

// General Information:

Product Display Title: Snap Fit Panel Mount Twin Fused IEC Inlets

Product Family: IEC Connectors

Product Series: IEC60320 Main Inlets and Outlets

Approvals: CSA

Body Material: Nylon 66

Current Max: 10A

Flamability Rating: UL94V-0

Function: Panel Mount Fused Connector

Iec Connector Mates With: PX0587,PX0587/SE,PX0588

Iec En60620 Type: EN60 320-1 Standard Sheet C14 Class I

Max Operating Temperature: +70°C

Min Operating Temperature: -20°C

Max Panel Thickness: 3mm

Min Panel Thickness: 3mm

Number Of Contacts: 3 Contacts

Rohs Compliant: Yes

Voltage Max: 250V

// Product PDF Links

 [IEC Connectors product data](#)

// Product 3D CAD Model Links

 [PF0033/30/633D CAD Model](#)