

Han 24Mod Docking Frame Moveable, Set

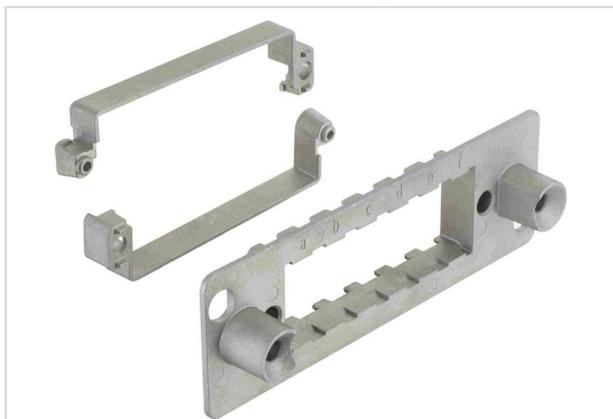


Image is for illustration purposes only. Please refer to product description.

| | |
|--------------------|-------------------------------------------------------------------------------|
| Part number | 09 14 024 1706 |
| Specification | Han 24Mod Docking Frame Moveable, Set |
| HARTING eCatalogue | https://harting.com/09140241706 |

Identification

| | |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Category | Accessories |
| Series | Han-Modular® |
| Type of accessory | Docking frame |
| Description of the accessory | Float mount for 6 modules a ... f |
| Features | The docking frame has no PE contact as it is not required in many drawer system applications. Suitable for Han-Modular® modules except for Han® Megabit module, Han® RJ45 module, optical and pneumatic modules. |

Version

| | |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Details | Please use float washer 09140009936 for float mounting. |
| Details | Rated voltage ≤630 V Rated impulse voltage ≤6 kV Pollution degree 2 For a complete connector the specified voltage rating is the maximum level which can be achieved. In cases where the used module(s) do offer lower voltage ratings, then these lower ratings are valid. Higher voltage ratings in individual applications can be approved in coordination with HARTING. |

Technical characteristics

| | |
|---------------------------|-----------------------------------------|
| Limiting temperature | -40 ... +125 °C |
| Mating cycles | ≥10,000 |
| Note on the mating cycles | Mating cycles with other HMC components |
| Floating tolerance | ±2 mm |



Pushing Performance
Since 1945

Technical characteristics

| | |
|---------------|-------|
| Lock-in range | ±4 mm |
|---------------|-------|

Material properties

| | |
|--------------------------------------|----------------|
| Material | Zinc die-cast |
| RoHS | compliant |
| ELV status | compliant |
| China RoHS | e |
| REACH Annex XVII substances | Not contained |
| REACH ANNEX XIV substances | Not contained |
| REACH SVHC substances | Not contained |
| California Proposition 65 substances | Yes |
| California Proposition 65 substances | Lead Nickel |

Specifications and approvals

| | |
|----------------|--------------------------|
| Specifications | IEC 60664-1 IEC 61984 |
|----------------|--------------------------|

Commercial data

| | |
|--------------------------------|---------------------------------------------------------|
| Packaging size | 1 |
| Net weight | 281.31 g |
| Country of origin | China |
| European customs tariff number | 85389099 |
| GTIN | 5713140194595 |
| eCl@ss | 27440206 Module carrier frame for industrial connectors |
| ETIM | EC002312 |
| UNSPSC 24.0 | 39121421 |