




AMP | AMP Type III+

TE Internal #: 1-66098-9

Tin (Sn), Pin Contact, 18 – 16 AWG, .8 – 1.4 mm² Wire, Spring Contact Retention, Size 16, Discrete Wire, Crimp, Brass, Power & Signal, AMP Type III+

[View on TE.com >](#)

Connectors > Contacts > Connector Contacts

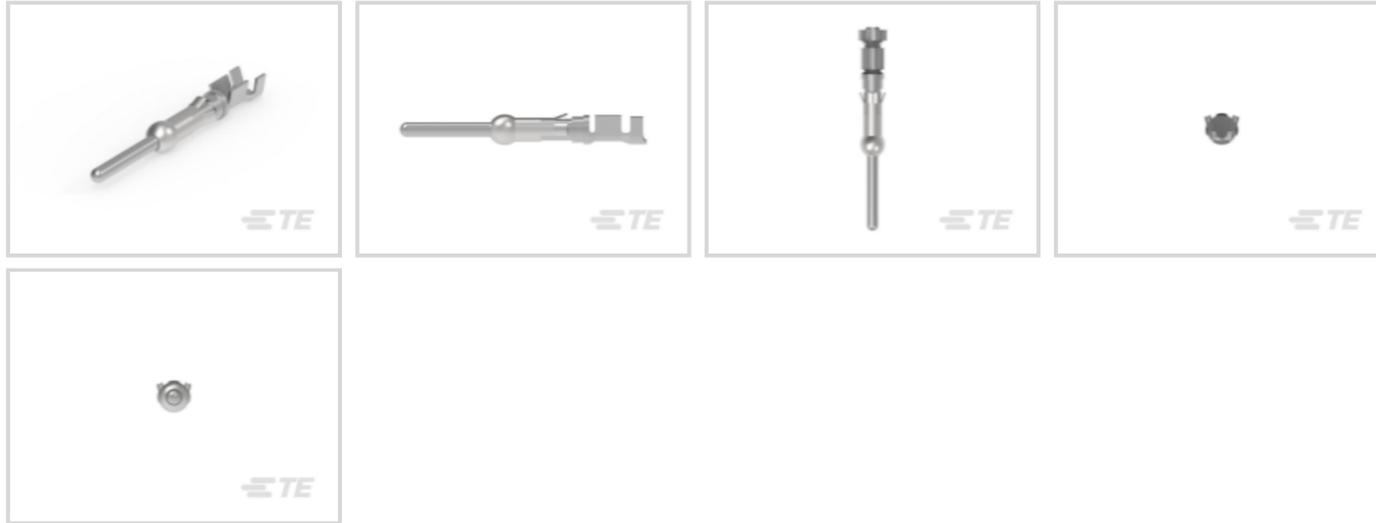

Contact Type: **Pin**

Contact Mating Area Plating Material: **Tin (Sn)**

Wire Contact Termination Area Plating Material: **Tin**

Contact Retention Within Housing: **With**

Contact Retention Type Within Housing: **Spring**

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
--------------------	-------------------

Sealable	No
----------	----

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Contact Shape & Form	Round
----------------------	-------

Contact Length	27.1 mm[1.067 in]
----------------	-------------------

Barrel Type	Open
-------------	------

Contact Type	Pin
--------------	-----

Contact Mating Area Plating Material	Tin (Sn)
--------------------------------------	----------

Wire Contact Termination Area Plating Material	Tin
--	-----

Contact Retention Within Housing	With
----------------------------------	------

Contact Size	Size 16
--------------	---------

Contact Base Material	Brass
-----------------------	-------



Contact Current Rating (Max)	13 A
Mating Pin Diameter	1.57 mm[.062 in]
Contact Mating Area Plating Material Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Thickness	1.27 μm[50 μin]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Spring
Wire Insulation Support	With

Dimensions

Wire Size	.8 – 1.4 mm ²
Compatible Insulation Diameter Range	2.03 – 2.54 mm[.08 – .1 in]

Usage Conditions

Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Quantity	4000
Packaging Method	Reel

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250)



Candidate List Declared Against: JUNE 2025 (250)
Does not contain REACH SVHC

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | **AMP Type III+**



Connector Contacts(365)



Insertion & Extraction Tools(4)



Power Contacts(365)

Customers Also Bought



TE Part #819964-SF
FN9262B-10-06



TE Part #60007-2
RING TERMINAL CRIMP TAB 26-22
AWG TPBR




TE Part #1-66100-9
III+ SKT,18-16,TIN ,STRIP



TE Part #66332-7
III+ PIN,24-20,15AU/FL,STRIP




TE Part #1-66359-9
III+PIN,18-14,TIN,STRIP

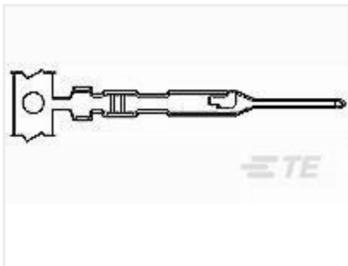

TE Part #104505-8
MTE PIN 22-26 AWG PLTD



TE Part #205201-3
20DF SOCKET CONTACT,PLATED

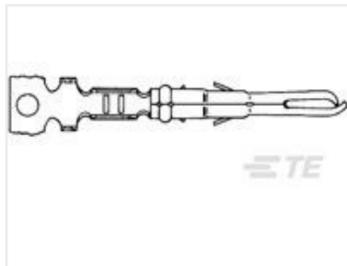

TE Part #640580-2
MR SPLIT PIN AUPHBRZ LP 26-18



TE Part #1-770009-0
UMNL II PIN AUSN/NI/BR



TE Part #1-794218-0
MINI UMNL2 PIN 26-22AWG AU LF

Documents

Product Drawings

II+ PIN, 18-16,TIN STRIP

English

CAD Files

Customer View Model

ENG_CVM_1-66098-9_AE.3d_igs.zip

English

Customer View Model



[ENG_CVM_1-66098-9_AE.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1-66098-9_AE.2d_dxf.zip](#)

English

3D PDF

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-66098-9_AP.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-66098-9_AP.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-66098-9_AP.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMP Circular Connectors for Commercial Signal & Power Applications](#)

English

[M_SERIES_PIN_AND_SOCKET_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

English