

# FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964

<https://www.phoenixcontact.com/us/products/1413964>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



SC-RJ panel mounting frame, IP67, for push-pull interlocking, metal, for rectangular mounting cutout, with seal and mounting screws, incl. SC-RJ coupling

## Your advantages

- High reliability with comprehensive quality assurance measures
- Intuitive front-panel operation and clear control cabinet layout thanks to uniform design

## Commercial data

Item number	1413964
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB17
Product key	ABNODE
GTIN	4055626082387
Weight per piece (including packing)	34.1 g
Weight per piece (excluding packing)	31.096 g
Customs tariff number	85367000
Country of origin	PL

1413964

<https://www.phoenixcontact.com/us/products/1413964>

## Technical data

### Notes

General	This product corresponds to the PROFINET Cabling and Interconnection Technology Guideline for PROFINET regulations, version 2.00, order no: 2.252, Chapter 8.2 Connectors for Outside Environment (Balanced cabling) and chapter 13 Application specific Cabling and Interconnection Technology (AIDA)
---------	--

### Product properties

Product type	Panel-mount frame
Type	SC-RJ
Number of positions	2
Connection profile	SC-RJ


### Insulation characteristics

Degree of pollution	2
---------------------	---

### Electrical properties

Transmission medium	FO
Transmission speed	10 Gbps

### Dimensions

Dimensional drawing	
Width	22.2 mm
Height	42 mm

### Mechanical characteristics

Ferrule diameter	2.50 mm
------------------	---------

### Material specifications

Material	Metal
Flammability rating according to UL 94	V0
Seal material	NBR
Ferrule material	Zirconia ceramics
Housing material	Metal
Housing surface material	nickel-plated
Contact carrier material	PPA

1413964

<https://www.phoenixcontact.com/us/products/1413964>

## Cable/line

External cable diameter	≤ 10.00 mm (of 5 mm)
Resistance to oil	yes
Flame resistance	yes

## Mechanical properties

### Mechanical data

Insertion/withdrawal cycles	≥ 50
-----------------------------	------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65/IP67
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-10 °C ... 40 °C
Resistance to oil	yes

## Standards and regulations

Flame resistance	yes
Resistance to oil	yes

# FOC-V14-F1ZNI-EM/SJB - Panel-mount frame




1413964

<https://www.phoenixcontact.com/us/products/1413964>

## Drawings

Dimensional drawing

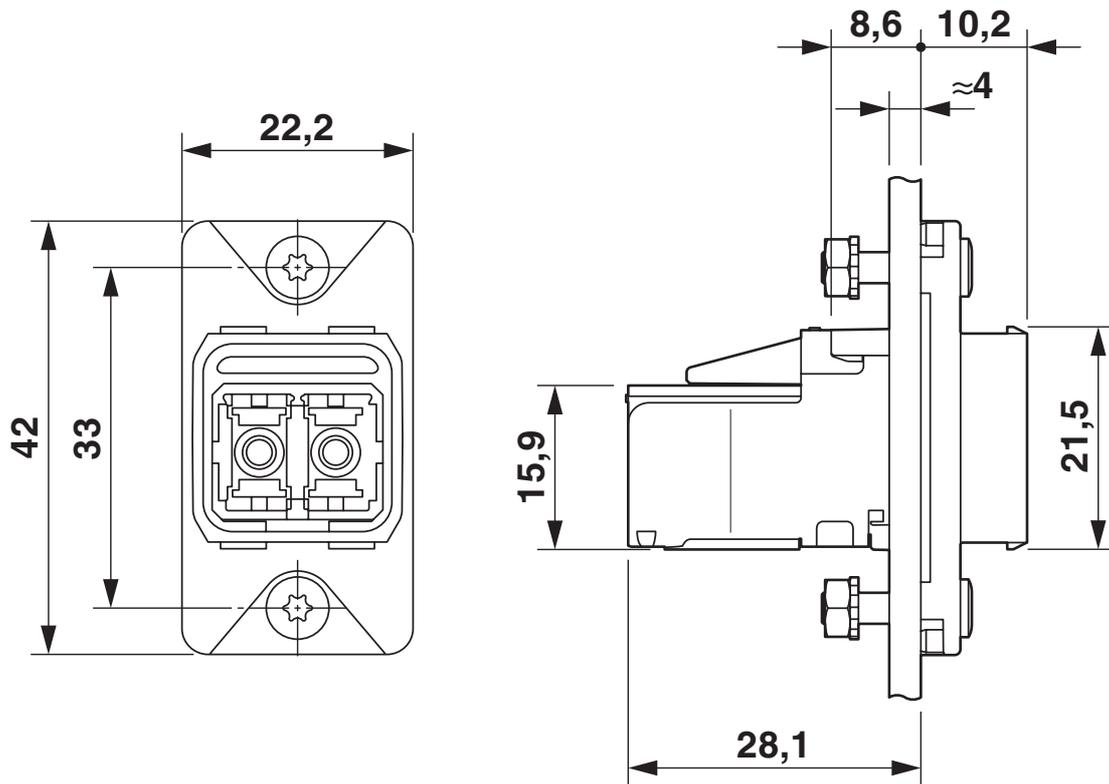


# FOC-V14-F1ZNI-EM/SJB - Panel-mount frame

1413964

<https://www.phoenixcontact.com/us/products/1413964>



Drilling plan/solder pad geometry

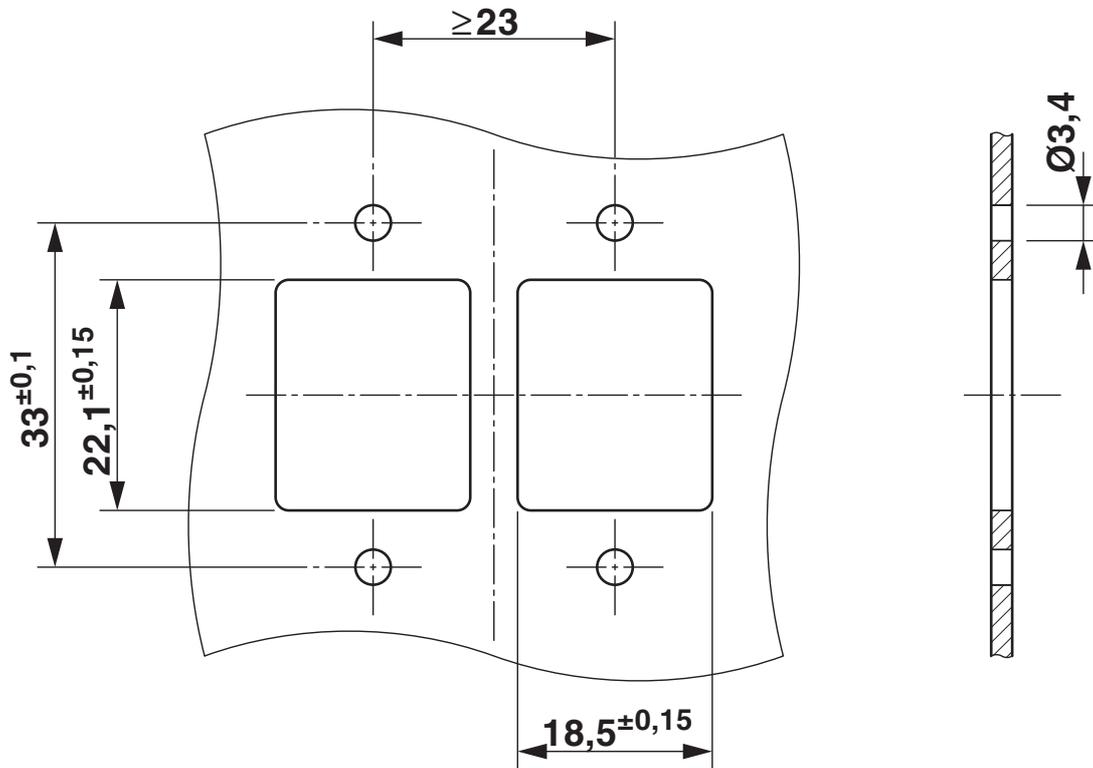

# FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964

<https://www.phoenixcontact.com/us/products/1413964>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1413964>



**UL Listed**

Approval ID: E308814-20180830

1413964

<https://www.phoenixcontact.com/us/products/1413964>

## Classifications

### ECLASS

ECLASS-13.0	27440210
ECLASS-15.0	27440210

### ETIM

ETIM 9.0	EC002310
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# FOC-V14-F1ZNI-EM/SJB - Panel-mount frame



1413964

<https://www.phoenixcontact.com/us/products/1413964>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)