




Connectors > Contacts > Connector Contacts

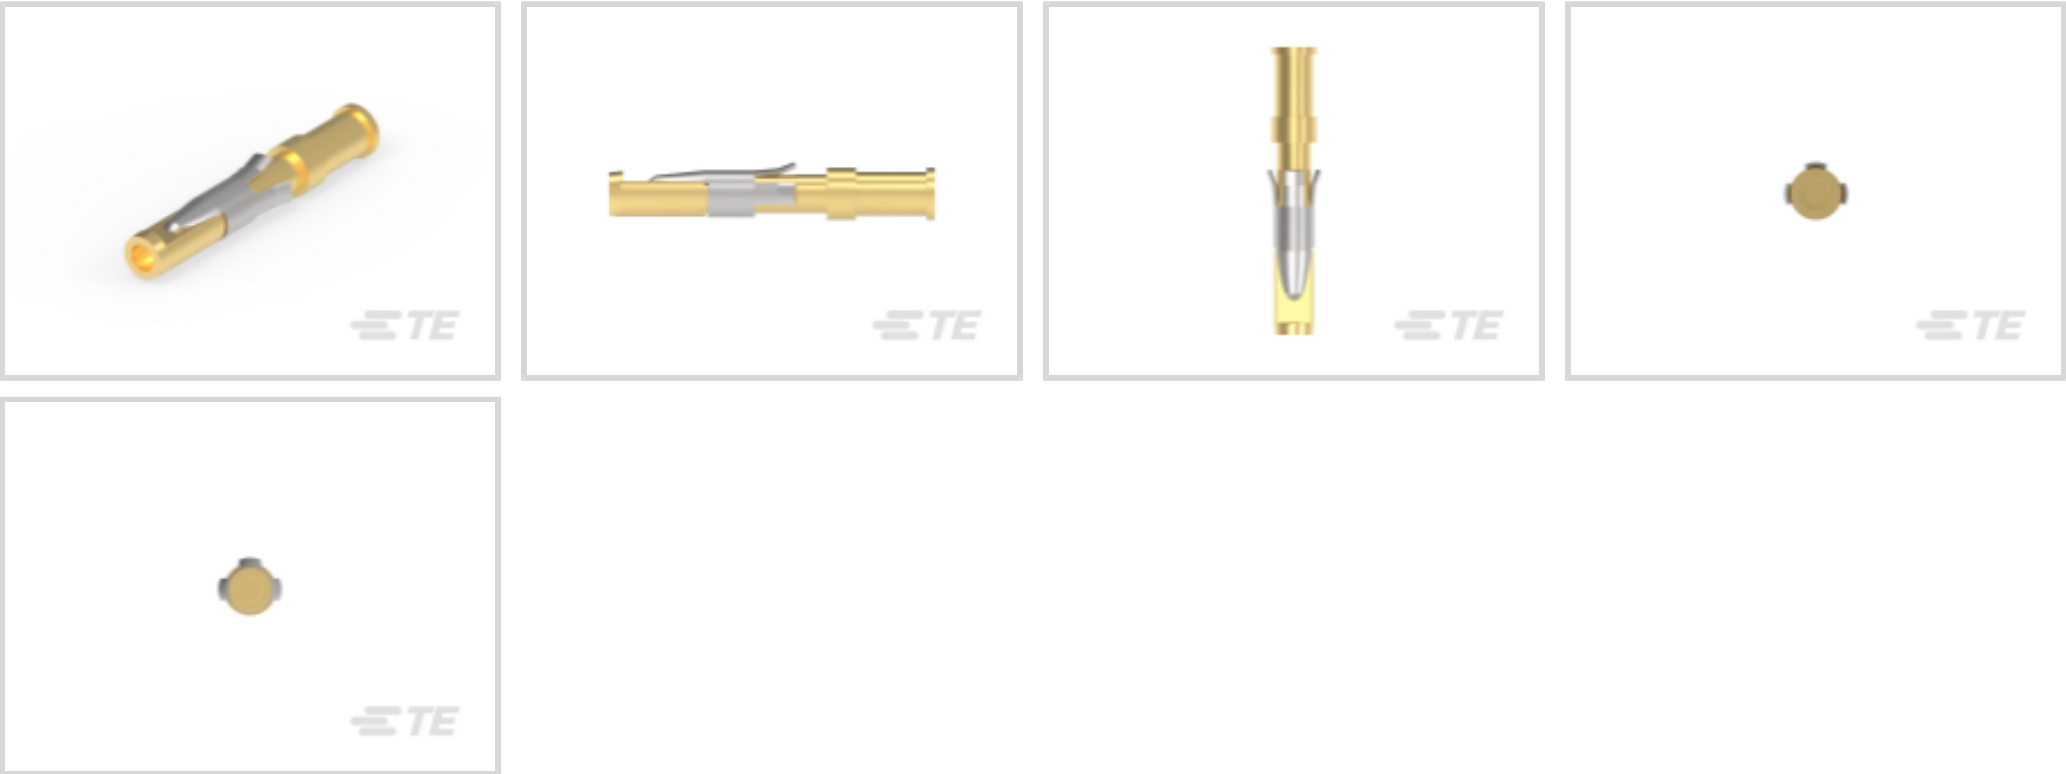

Contact Type: **Socket**
Contact Mating Area Plating Material: **Gold (Au)**
Wire Contact Termination Area Plating Material: **Gold**
Contact Retention Within Housing: **With**
Contact Retention Type Within Housing: **Spring**

Features

Product Type Features

Discrete Wire Type	Solid or Stranded
Sealable	No

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Contact Features

Contact Length	19.94 mm[.785 in]
Barrel Type	Closed
Contact Type	Socket
Contact Mating Area Plating Material	Gold (Au)
Wire Contact Termination Area Plating Material	Gold
Contact Retention Within Housing	With
Contact Size	Size 16
Contact Base Material	Brass
Contact Current Rating (Max)	13 A



Mating Pin Diameter	1.57 mm[.062 in]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	.76 µm[30 µin]
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 µm[50 µin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Contact Retention Type Within Housing	Spring
Wire Insulation Support	Without

Dimensions

Wire Size	2 mm²
-----------	-------

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Identification Marking

Contact Color Code	Violet/Blue
--------------------	-------------

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量超出标准 Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2025
(250)
Candidate List Declared Against: JAN 2025
(247)
SVHC > Threshold:
Pb (2.8% in 26837858059)


Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 213851-1 CPC PLUG ASSEMBLY SIZE 23-24	 TE Part # 1977884-1 SLD CPC PLUG ASSY,13-9,STD SEX, UV RESIS	 TE Part # 539972-1 EXTRACTION TOOL	 TE Part # 208457-3 CMC PLUG ASSEMBLY,SZ 28-24
 TE Part # 208488-1 CMC PLUG ASSEMBLY,SZ 22	 TE Part # 208714-1 CMC PLUG ASSEMBLY,SZ 14-7	 TE Part # 796449-1 PLUG ASSY,CPC,17-14,REV SEX	 TE Part # 796288-1 PLUG.ASSY,23-37STD SEX THRD AD



TE Part # 796450-1
PLUG ASSY,CPC,17-9,REV SEX



TE Part # 1977887-1
PLUG.ASSY,23-37STD SEX THRD AD, UV RESIS



TE Part # 208720-1
PLUG ASSY,SZ 14,CMC



TE Part # 206305-1
CPC PLUG ASSEMBLY SIZE 23-37




TE Part # 211766-1
CPC PLUG ASSEMBLY SIZE 17-9



TE Part # 211772-1
CPC PLUG ASSEMBLY SIZE 23-19



TE Part # 206060-1
CPC PLUG ASSEMBLY SIZE 11-4



TE Part # 206554-1
CPC PLUG ASSEMBLY SIZE 17-16



TE Part # 208470-3
CMC PLUG ASSEMBLY,SZ 28



TE Part # 213852-1
CPC PLUG ASSEMBLY SIZE 23-19



TE Part # 208714-2
CMC PLUG ASSEMBLY,SZ 14-7



TE Part # 208488-3
CMC PLUG ASSEMBLY,SZ 22

Also in the Series | AMP M Series



Board-to-Board Jumpers & Shunts(3)



Connector Caps & Covers(14)



Connector Hardware(47)



Connector Strain Relief(13)



PCB Headers & Receptacles(9)



Rack & Panel Connectors(1)



Rectangular Power Connectors(82)



Wire-to-Board Headers & Receptacles (1)

Customers Also Bought


Gold (Au), Socket Contact, 14 AWG, 2 mm² Wire, Spring Contact Retention, Size 16, Discrete Wire, Crimp, Brass, Power, AMP M Series



TE Part #726240-000
202D211-4/180-0



TE Part #172079-000
202K121-4/86-0



TE Part #879372-000
202C611-51/86-0




TE Part #66358-4
III+ SKT,18-14,30AU/FL,STRIP

TE Part #66587-2
TYPE VI PIN,MULTI-MATE,L.P.

TE Part #87077-1
MOD IV KEYING PLUG

TE Part #103455-2
MOD V RECP LP

TE Part #6909-2040-030
POTENTIOMETER KIT



TE Part #843459-000
102A962-3/42-8

TE Part #130743-1
CONTACT ASSY, SOCKET, SZ 16,
LONG

Documents

Product Drawings

CONTACT SOCKET ASSY.

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_201568-1_U.3d_igs.zip

English

Customer View Model

ENG_CVM_201568-1_U.3d_stp.zip

English

Customer View Model

ENG_CVM_201568-1_U.2d_dxf.zip

English

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_201568-1_AB.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_201568-1_AB.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_201568-1_AB.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMP Circular Connectors for Commercial Signal & Power Applications](#)

English

[Signal Contacts](#)

English

[M_SERIES_PIN_AND_SOCKET_CONNECTORS](#)

English

Product Specifications

[Application Specification](#)

Japanese

[Application Specification](#)

English

[Type II Screw Machine Contacts](#)

Japanese

[Application Specification](#)

Japanese

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

Japanese

[Instruction Sheet \(U.S.\)](#)

English

[Instruction Sheet \(U.S.\)](#)

English

[Application and Maintenance for Crimping Die Assemblies](#)

English

[Instruction Sheet \(U.S.\)](#)

English

[Instruction Sheet \(U.S.\)](#)

English

[Application and Maintenance for Hand Crimping Tool](#)

English

201568-1

Gold (Au), Socket Contact, 14 AWG, 2 mm² Wire, Spring Contact Retention, Size 16,
Discrete Wire, Crimp, Brass, Power, AMP M Series

