

Economy Power 2.5


TE Internal #: 2132230-4

PCB Mount Header, Vertical, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Fully Shrouded, Tin (Sn), Through Hole - Solder, Economy Power 2.5

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

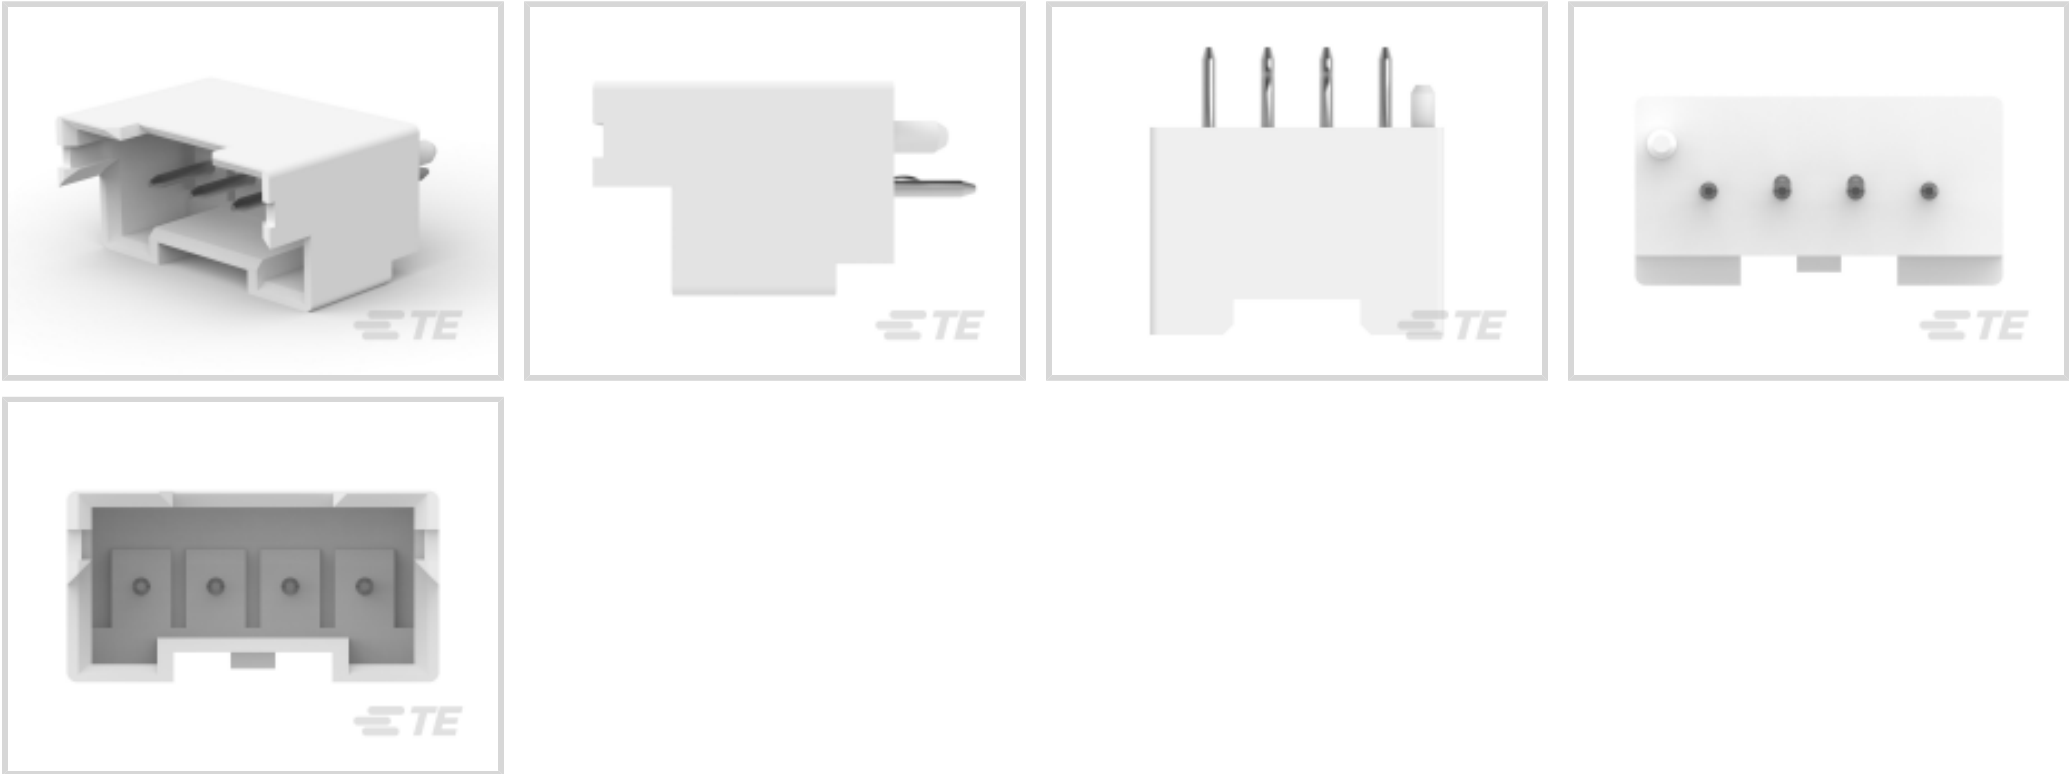

PCB Connector Type: **PCB Mount Header**

PCB Mount Orientation: **Vertical**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **2.5 mm [.098 in]**

Features

Product Type Features

PCB Connector Type	PCB Mount Header
Connector System	Wire-to-Board
Header Type	Fully Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Connector Product Type	Connector Assembly

Configuration Features

Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	4
Number of Rows	1

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Body Features



Primary Product Color	Natural
-----------------------	---------

Contact Features

Mating Pin Diameter	.6 mm[.024 in]
PCB Contact Termination Area Plating Material Thickness	2.032 μm[80 μin]
Contact Shape & Form	Round, Square
Contact Layout	Inline
Contact Mating Area Length	3.6 mm[.142 in]
Contact Base Material	Brass
Contact Mating Area Plating Material	Tin (Sn)
Contact Mating Area Plating Material Finish	Bright
Contact Mating Area Plating Material Thickness	2 – 5 μm[80 – 200 μin]
Contact Type	Pin
Contact Current Rating (Max)	4.2 A
PCB Contact Termination Area Plating Material	Tin

Termination Features

Termination Post & Tail Diameter	.6 mm[.024 in]
Termination Post & Tail Length	3.4 mm[.134 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Mating Retention Type	Latch
Mating Alignment Type	Polarization
PCB Mount Retention Type	Kinked Legs
PCB Mount Alignment Type	Locating Posts
PCB Mount Alignment	With
Mating Retention	With
PCB Mount Retention	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

Centerline (Pitch)	2.5 mm[.098 in]
Housing Material	PBT GF

Dimensions

--



Connector Width	6.4 mm[.252 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Height	8.8 mm[.346 in]
Connector Length	15 mm[.59 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	600
Packaging Method	Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 1969730-4
EP2.5 SHROUDED HDR ASSY 4P
VERTICAL

TE Part # 1744417-4
4 POS EP 2.5 HSG, GLOW WIRE

TE Part # 1744560-4
Header Housing Assy, EP 2.5 RA, 4 Pos.

TE Part # 2336075-2
HTSM WITH EP CONNECTOR

TE Part # 1969442-4
EP 2.5 TPA Housing, 4 Pos

Also in the Series | Economy Power 2.5

Connector Contacts(6)

Connector Hardware(42)

PCB Headers & Receptacles(412)

Rectangular Connector Housings(264)

Rectangular Power Connectors(673)

Standard Rectangular Connectors(264)

Wire-to-Board Connector Assemblies & Housings(93)

Wire-to-Board Headers & Receptacles (412)

Customers Also Bought




TE Part #1623931-8

CFR25 5% 33K




TE Part #5-1879216-1

CPF0402 255K 0.1% 25PPM 1K RL

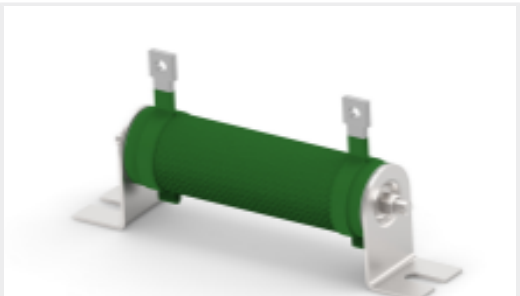


TE Part #CAT-C339-T2201

Wirewound Resistor: Mineral, 2.5 Kw

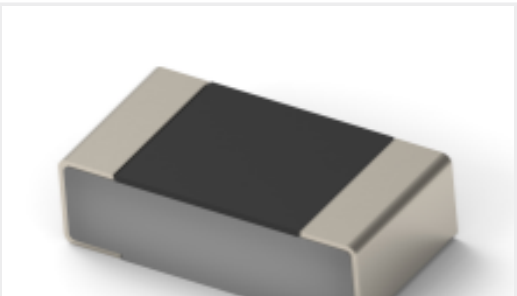

TE Part #4-1879808-5

RP 1J 0.1W 340K 0.1% 15PPM 1K RL

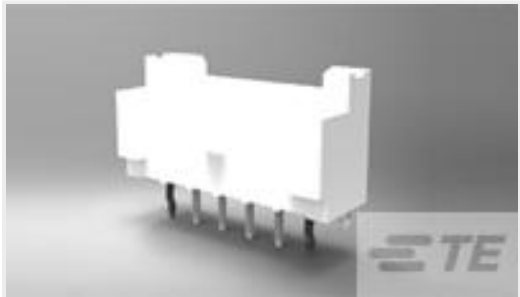


TE Part #2132230-8

EP2.5 Shrouded HDR ASSY 8P VER




TE Part #2176405-8

3550 1K0 5%

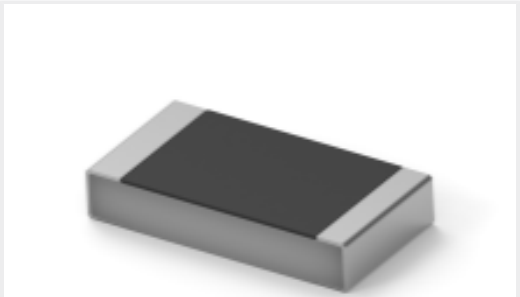


TE Part #3-2176458-4

CPF 1206 2R21 0.1% 25ppm 1K RL

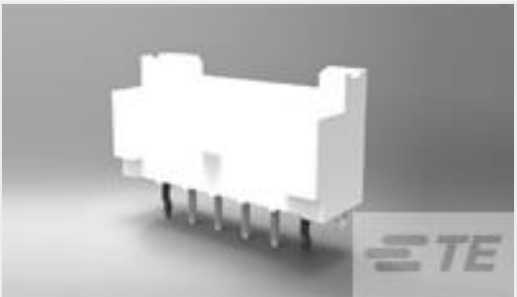

TE Part #2132230-5

EP2.5 Shrouded HDR ASSY 5P VER



TE Part #10203233-00

FCS-01B FLOW SWITCH SENSOR

Documents

Product Drawings

EP2.5 Shrouded HDR ASSY 4P VER

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2132230-4_H.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2132230-4_H.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2132230-4_H.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



7-1773458-5_ECONOMY_POWER_QRG

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

VDE Certificate

English