
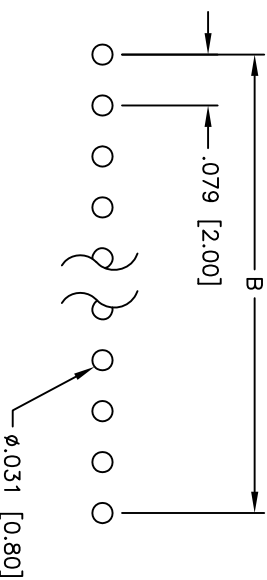




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/31/05	

APPROVED: _____

DATE: _____ TITLE: _____

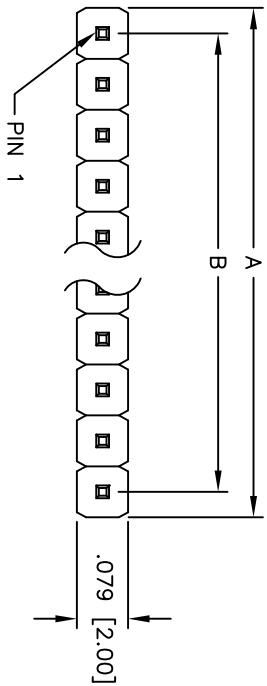

RECOMMENDED
PCB LAYOUT

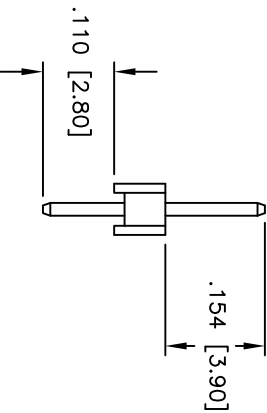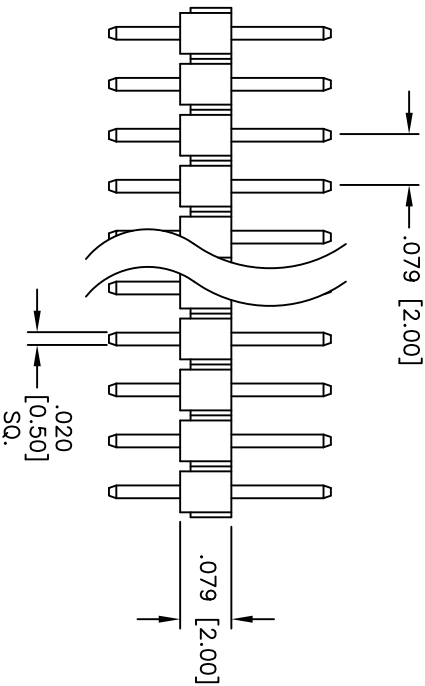

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
Insulator color: Black
Contacts: Brass
Plating: Gold flash over Nickel underplate overall
Electrical: Current rating: 1 Amp max
Contact resistance: 20 mohms max
Insulation resistance: 5,000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating: Operating temperature: -55°C to +105°C
Environmental: Lead free, RoHS compliant

Positions: 2 thru 40
A = .079 [2.00] x No. of Positions
B = .079 [2.00] x No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
.X	± .10	ØXX	± .10	.XX	± .020
.XX	± .020	ØXXX	± .015	.XXX	± .015
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE		TITLE	
DRAWN	SS	3/31/05		.079 [2.00] SINGLE ROW PIN HEADER	
CHECKED				GOLD PLATED	
APPROVED				ADAM TECH	
909 Rahway Avenue, Union, NJ 07083		Phone: 908-687-5000 Fax: 908-687-5710		2PH1-XX-UA	
3/31/05		SIZE		REV.	
X		PART NO.		1 OF 1	
REF:		SCALE: NTS		SHEET 1 OF 1	