

381166441	DATA SHEET	
Valid from: 04.04.2024	EPIC® H-Q TS	

Description

- There are many different uses for this sturdy rectangular connector hood made of plastic. The female, side-mounted M25 thread is suitable for connecting a separate cable or conduit gland. This results in an optimised design with regard to weight and installation space.



General Characteristics

Series	H-Q
Version	Hood
Locking	Bolts for single lever
Cable entry	M25x1,5 according to EN 60423
Cable gland	See table
Protection (DIN EN 60529)	IP 65 (latched)
Protection (NEMA 250, UL50E)	4, 12 (latched)
Temperature Range	-40°C to +100°C, short term up to +125°C

Materials / Surfaces

Housing	PA-GF
Flammability Class according to UL94	V-0

Standard

Harmonised Standard	DIN EN 60529
Safety Standard	IEC 61984

Approvals

cURus and VDE in preparation


Versions

Article number	Article description	Cable gland	Color
381166441	EPIC® H-Q TS M25 BK	No	Black (RAL 9005)

Creator: FICE1/BU EPIC Released: VACH1/BU EPIC	Document: DB381166441EN Version: 00	Page 1 of 2
---	--	-------------

381166441	DATA SHEET	
Valid from: 04.04.2024	EPIC® H-Q TS	

Technical Drawings

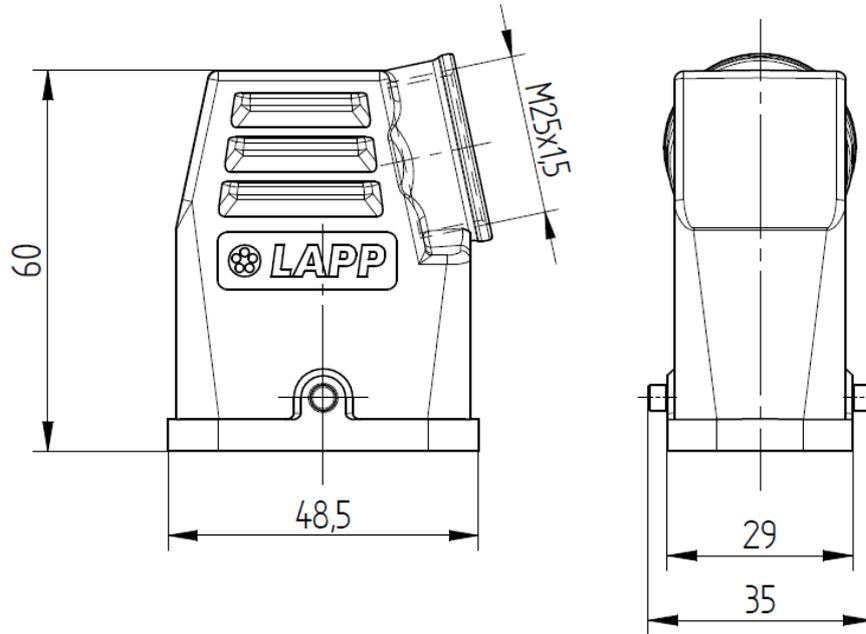

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof

Application range

Machine and equipment manufacturing, control engineering, electronic laboratory

Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: FICE1/BU EPIC Released: VACH1/BU EPIC	Document: DB381166441EN Version: 00	Page 2 of 2
---	--	-------------