AMP | Circular Plastic Connectors Series 1, AMP Type III+
TE Internal #: 66566-4
Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

View on TE.com >

Connectors > Contacts > Connector Contacts

Contact Type: **Pin**

Contact Mating Area Plating Material: **Precious Metal**

Wire Contact Termination Area Plating Material: **Tin**

Contact Retention Within Housing: **With**

Contact Size: **Size 16**

Features

Contact Features

Contact Type	Pin
Contact Mating Area Plating Material	Precious Metal
Wire Contact Termination Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Size	Size 16
Contact Base Material	Brass
Contact Current Rating (Max)	13 A
Mating Pin Diameter	1.57 mm[.062 in]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	1.27 µm[50 µin]
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel

66566-4

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

Contact Underplating Material Thickness	1.27 µm[50 µin]

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	With

Dimensions

Wire Size	.2 – .6 mm²
Compatible Insulation Diameter Range	1.52 – 3.05 mm[.06 – .12 in]

Usage Conditions

Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]

Operation/Application

Circuit Application	Power & Signal

Packaging Features

Packaging Quantity	1000
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

TE Part # 213851-1
CPC PLUG ASSEMBLY SIZE 23-24

TE Part # 1977884-1
SLD CPC PLUG ASSY,13-9,STD SEX, UV RESIS

TE Part # 539972-1
EXTRACTION TOOL

TE Part # 208457-3
CMC PLUG ASSEMBLY,SZ 28-24

TE Part # 208488-1
CMC PLUG ASSEMBLY,SZ 22

TE Part # 208714-1
CMC PLUG ASSEMBLY,SZ 14-7

TE Part # 796449-1
PLUG ASSY,CPC,17-14,REV SEX

TE Part # 796288-1
PLUG.ASSY,23-37STD SEX THRD AD

TE Part # 796450-1
PLUG ASSY,CPC,17-9,REV SEX

TE Part # 206516-1
CPC PLUG ASSEMBLY SIZE 11-4

TE Part # 213853-1
CPC PLUG ASSEMBLY SIZE 23-19

TE Part # 213849-1
CPC PLUG ASSEMBLY SIZE 17-16

TE Part # 208716-1
CMC PLUG ASSEMBLY,SZ 14

TE Part # 208718-2
CMC PLUG ASSEMBLY,SZ 14-5

TE Part # 200893-2
INSERTION TOOL CONT

TE Part # 211770-2
CPC PLUG ASSEMBLY SIZE 23-19

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

TE Part # 1977878-1
SLD CPC PLUG ASY,11-4,STD SEX, UV RESIST

TE Part # 796274-1
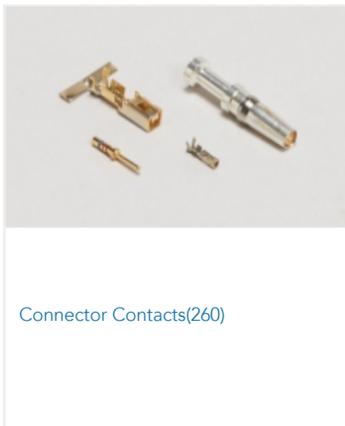SLD CPC PLUG ASSY,17-16,STD SX

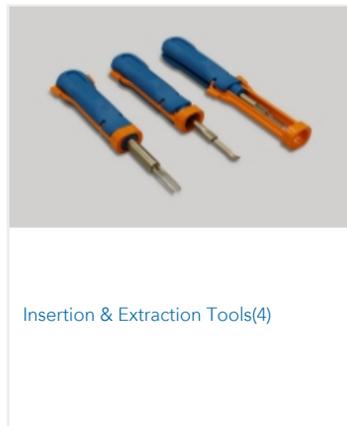TE Part # 796188-1
SLD CPC PLUG ASSY,23-24,STD SX
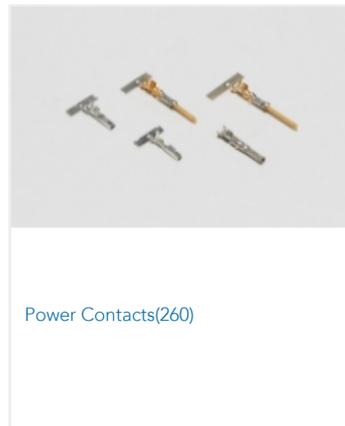
TE Part # 796271-1
SLD CPC PLUG ASSY,17-14,REV SX

Also in the Series | AMP Type III+
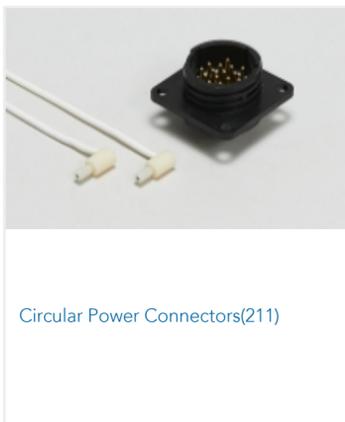
Connector Contacts(260)
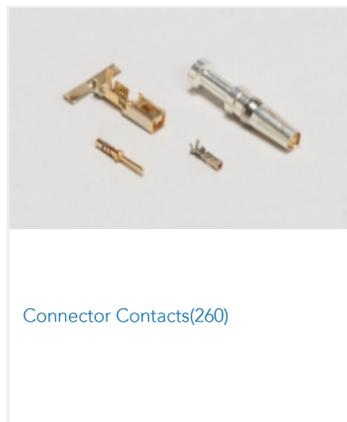
Insertion & Extraction Tools(4)
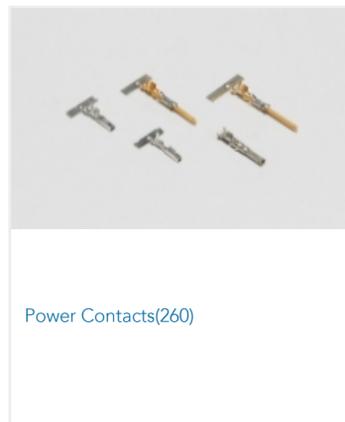
Power Contacts(260)

Also in the Series | Circular Plastic Connectors Series 1

Circular Power Connectors(211)

Connector Contacts(260)

Power Contacts(260)

Customers Also Bought

TE Part #CAT-P592-R472A
PIDG Ring Tongue Terminals

TE Part #8-52936-1
TERMINAL,PIDG SPR SPD 16-14 8

TE Part #61795-3
RING 18-14 AWG TPBR

TE Part #1-206062-4
CABLE CLAMP KIT #11

66566-4

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

TE connectivity

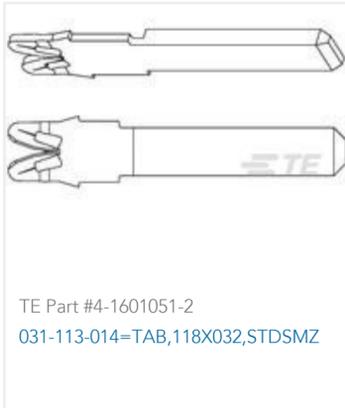TE Part #206227-6
23-7 RECEPT REV SEX,THRD INSRT

TE Part #626580-2
PL 250 REC 1.0-2.5MM2 0.35X26.54 TPPHBZ

TE Part #2-747579-7
SHLDING FERRULE,PLTD TIN,BULK

TE Part #788155-2
SLD CPC RCPT ASSY,11-4,REV SEX

TE Part #4-1601051-2
031-113-014=TAB,118X032,STDSMZ

Documents

Product Drawings

III+ PIN,24-20,30AU/FL,LP

English

CAD Files
Customer View Model

ENG_CVM_CVM_66566-4_K.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_66566-4_K.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_66566-4_K.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Signal Contacts

English

M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Product Specifications

66566-4

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

Japanese

Instruction Sheet (U.S.)

English

66566-4

Precious Metal, Pin Contact, 24 – 20 AWG, .2 – .6 mm² Wire, Size 16, Crimp, Brass, Power & Signal, -55 – 150 °C [-67 – 302 °F], AMP Type III+