

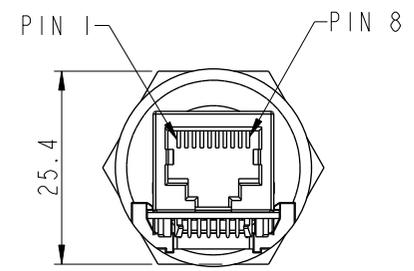
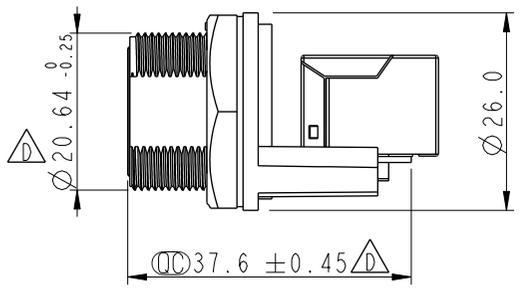
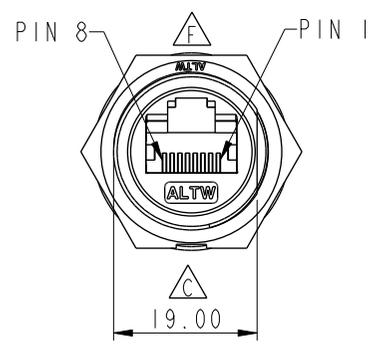
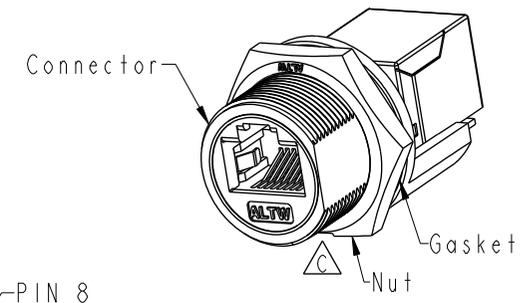


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO. | DATE       | SIGN  | DESCRIPTION      |
|------|---------|------------|-------|------------------|
| E    | C190405 | 2019/03/14 | Ruru  | Modify Note      |
| F    | C200524 | 2020/04/22 | Vicky | $\triangle F$ X2 |
| G    | C220799 | 2022/05/25 | Vicky | $\triangle G$ X1 |

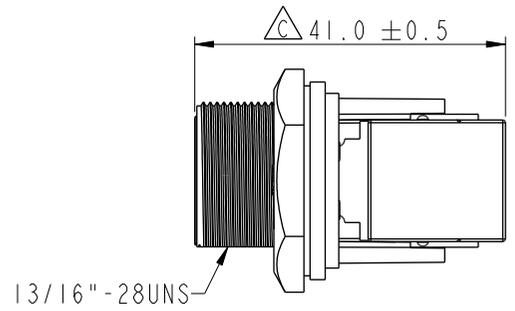

- $\triangle E$   $\triangle G$  Note:
- \* RoHS Compliant
  - \*  $\text{\textcircled{C}}$  Important dimension
  - \* Waterproof rate: IPX7, unmated
  - \* Connector
  - Housing: Thermoplastic, Black, RJ45 jack, shielded
  - \* Nut: Thermoplastic, Black
  - \* Gasket: Rubber, Gray
  - \* Use with waterproof cap or dust cap
  - Panel thickness max: 3.0mm
  - \* Use without waterproof cap or dust cap
  - Panel thickness max: 4.2mm
  - \* Gasket and nut are packed separately in pe bag

Recommended Panel Cut-Out

|   |                |  |
|---|----------------|--|
| UNIT: mm  |                | TITLE<br>RJ, C PLASTIC, C5E SHLD<br>FRONT FASTENED, F, PNL JACK S, SCREW |
| TOLERANCE<br>.X ±0.25<br>.XX ±0.1<br>.XXX ±0.05<br>ANGLES ±1° | SCALE<br>1:1   | SIZE<br>A4   |
|   | REV.<br>G      | SHEET<br>1 OF 1  |
|   | WC-REV.<br>C.3 | $\text{\textcircled{C}}$ : Inspection item                               |

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

|                                |                    |                    |
|--------------------------------|--------------------|--------------------|
| ITEM NO.<br>RCP-5SPFFH-SCU7001 | DRAWN BY<br>Ruru   | DATE<br>2019-03-14 |
| DWG NO.<br>RCP-5SPFFH-SCU7001  | CHECKED BY<br>Rita | DATE<br>2019-03-14 |
| CUSTOMER<br>ALTW               | APPROVED BY<br>Max | DATE<br>2019-03-14 |