
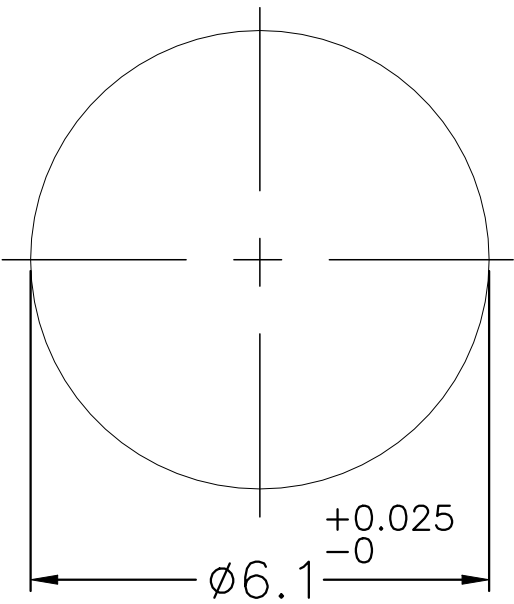
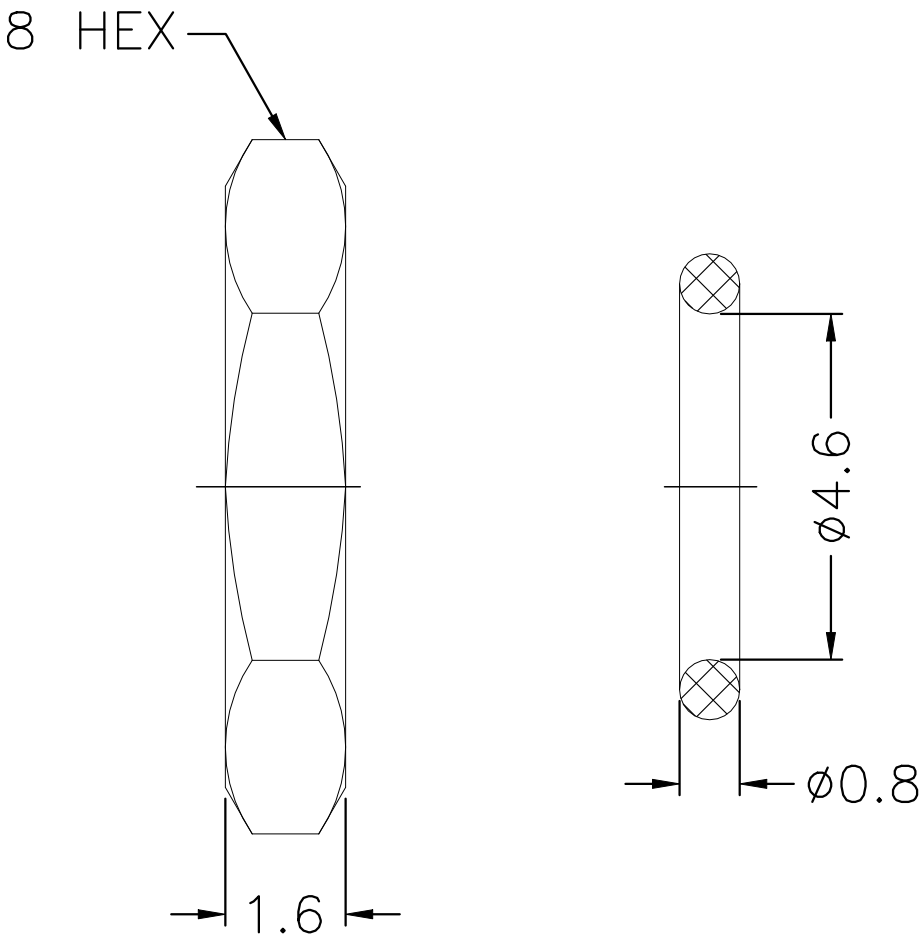
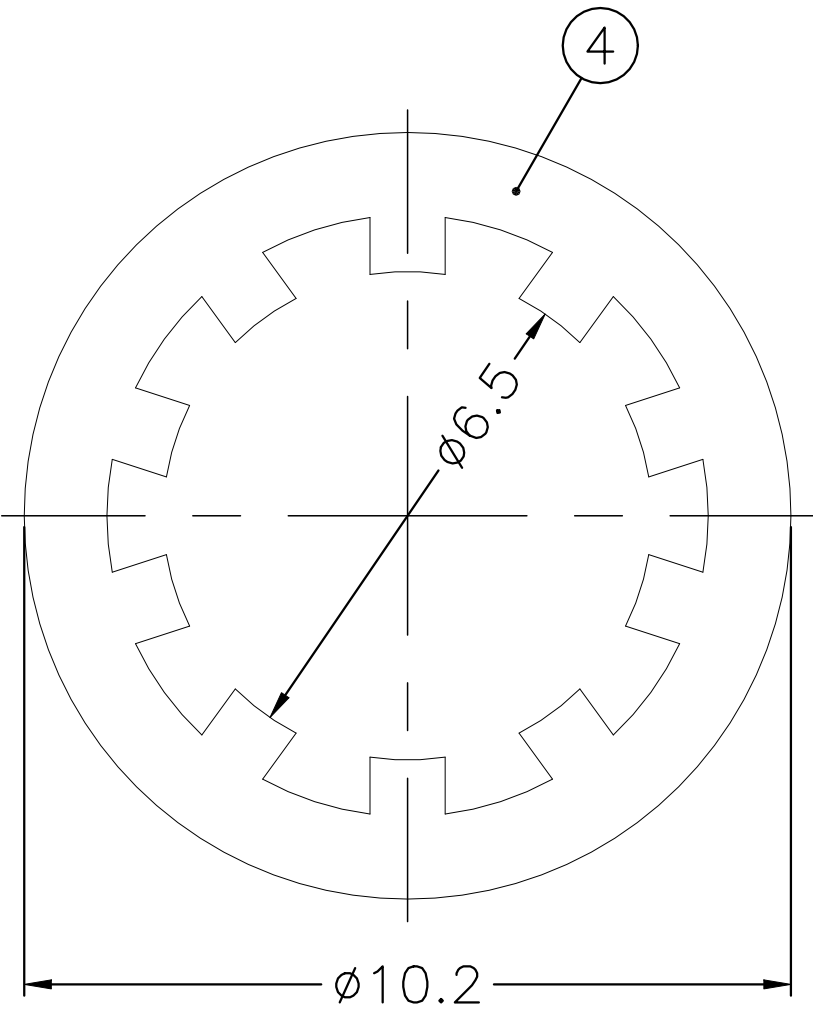


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	GTP(ECN-23-231221)	15SEP2023	ED	WH

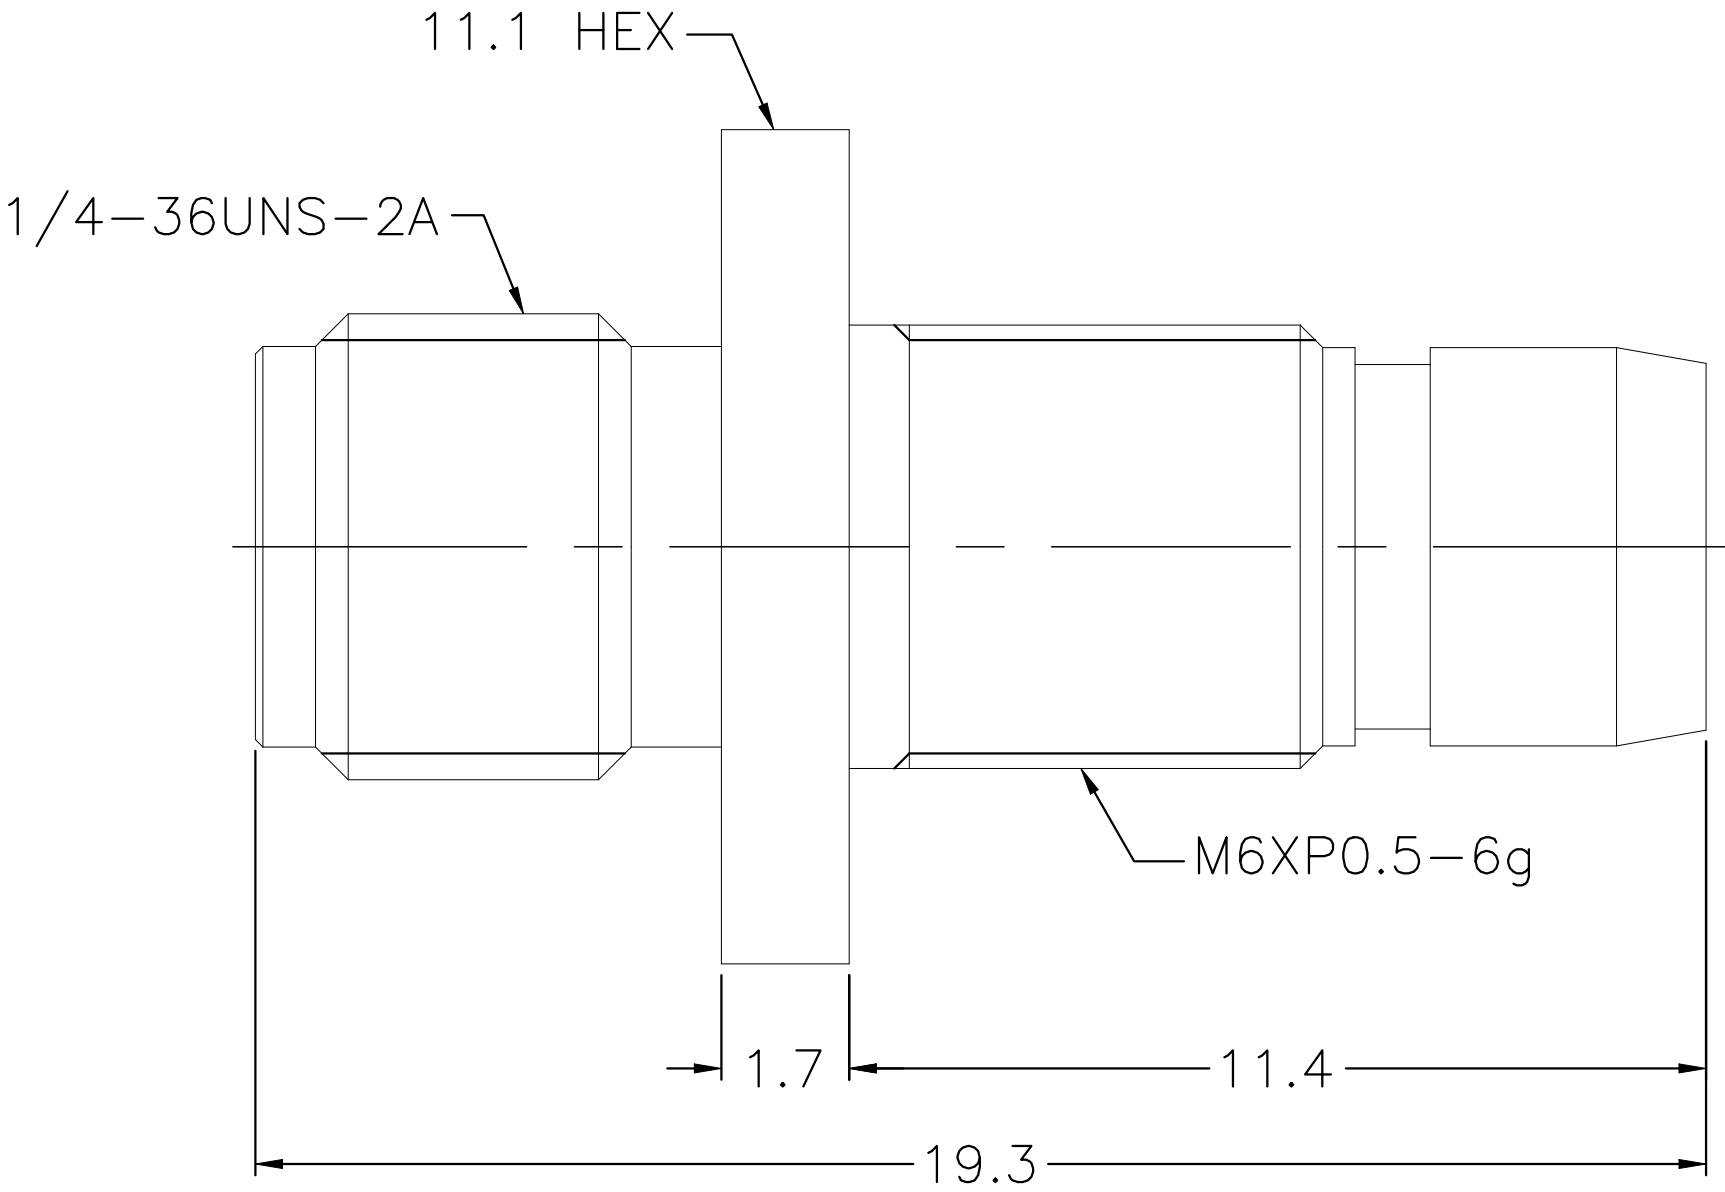

RECOMMENDED
MOUNTING HOLE

NOTES:

- PACK IN ACCORDANCE WITH TE SPEC 107-3275;
- ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED;
- ELECTRICAL CHARACTERISTICS :
FREQUENCY RANGE : DC-18GHz
NOMINAL IMPEDANCE : 50 OHMS
INSULATION RESISTANCE : 5000 MOHMS
WORKING VOLTAGE : 335 VRMS MAX
DIELECTRIC WITHSTANDING VOLTAGE : 750 VOLTS MAX
VSWR : 1.2(DC-18GHz)
CONTACT RESISTANCE :
CENTER CONTACT : 3 mOHMS MAX
OUTER CONTACT : 2 mOHMS MAX;
- MECHANICAL CHARACTERISTICS :
DURABILITY : 500 CYCLES
TORQUE SETTING(SMA) : 7-10 IN-LBS;
- TEMPERATURE RANGE: -65°-+165°;
- RoHS: COMPLIANT.

	1	-	FLUOROSILICONE	GASKET	6
	1	PASSIVATED	STAINLESS STEEL	HEX NUT	5
	1	PASSIVATED	STAINLESS STEEL	LOCK RING	4
	1	GOLD 50u"/ NICKEL/COPPER	BERYLLIUM COPPER	CENTER CONTACT	3
	1	NATURAL	PTFE	INSULATOR	2
	1	PASSIVATED	STAINLESS STEEL	BODY	1
	2466280-1	PLATING	MATERIAL	DESCRIPTION	ITEM
QUANTITY PER ASSY			PARTS LIST		

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN ED 13SEP2023	TE Connectivity		
			CHK ED 13SEP2023			
DIMENSIONS: mm			APVD WH 13SEP2023	NAME ADAPTER,SMA JACK TO BMA PLUG, STRAIGHT,BULKHEAD,18GHZ		
			PRODUCT SPEC			
			APPLICATION SPEC			
MATERIAL SEE TABLE			WEIGHT 0	SIZE A2	CAGE CODE 00779	DRAWING NO C-2466280
			FINISH -	RESTRICTED TO -		
CUSTOMER DRAWING				SCALE 8:1	SHEET 1 OF 1	REV A