




SLIM RP-SMA (F-F) 50Ω FRONT MOUNTING METAL FRAME FEEDTHROUGH

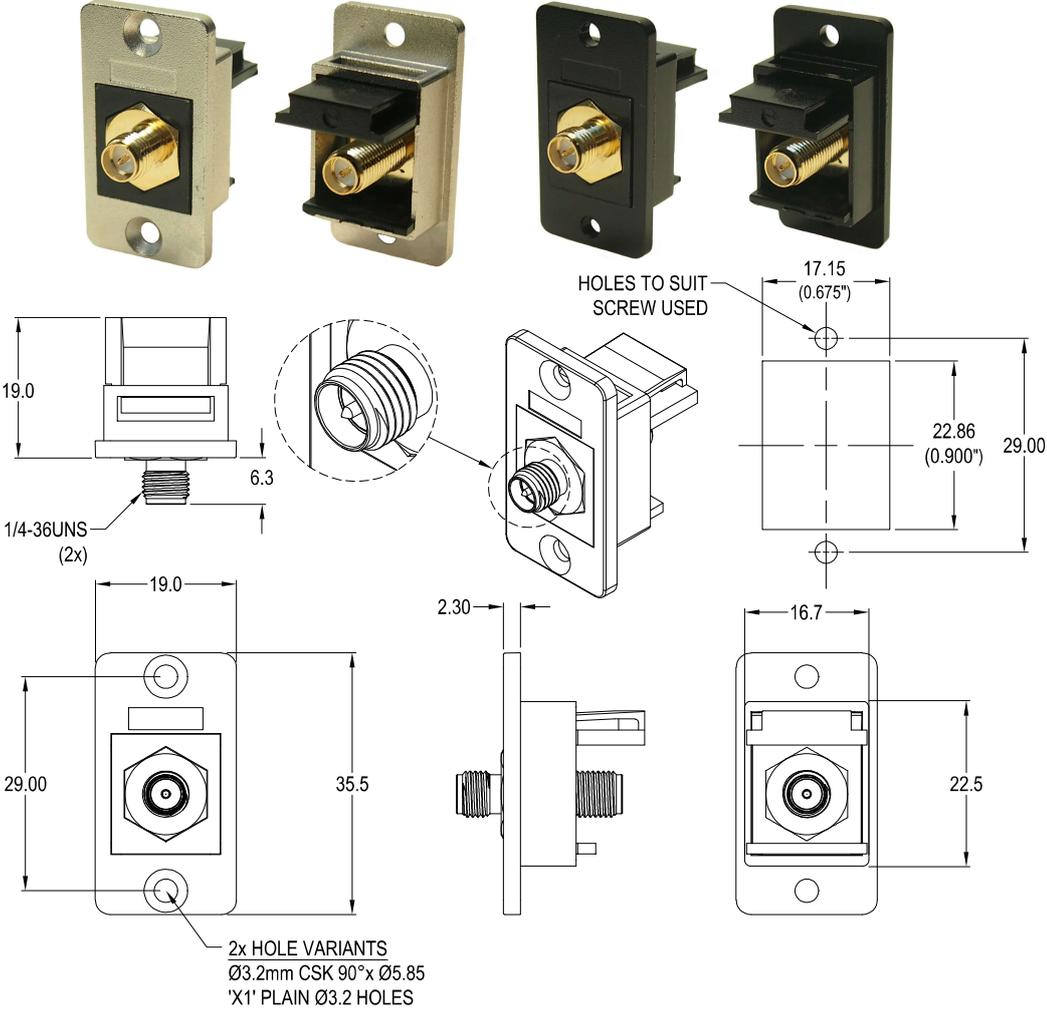

VARIANTS

Part No.

- CP30661M** SLIM FM RP-SMA (F-F) 50Ω Nickel frame, CSK holes
- CP30661MB** SLIM FM RP-SMA (F-F) 50Ω Black metal frame, CSK holes
- CP30661MX1** SLIM FM RP-SMA (F-F) 50Ω Nickel frame, Ø3.2 PLAIN holes
- CP30661MBX1** SLIM FM RP-SMA (F-F) 50Ω Black metal frame, Ø3.2 PLAIN

Feedthrough Features

- Fits standard rectangular cutout.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Body: Brass, Gold plated
2. Insulation: Teflon
3. RP-SMA Pin A+B: Brass, Gold plated
4. Nut: Brass, Gold plated
5. Frame: ABS UL94-V2
6. FT Frame: Zinc Diecast, Nickel or Black plated

SPECIFICATION

Impedance: 50 Ohm
 Frequency: 10MHz - 18GHz
 Operating Temp: -30°C to 80°C
 Plug A: Female RP-SMA
 Plug B: Female RP-SMA

