




DUALSLIM SMA (F-F) 50Ω FEEDTHROUGH CONNECTOR

Can be front or rear mounted in the panel

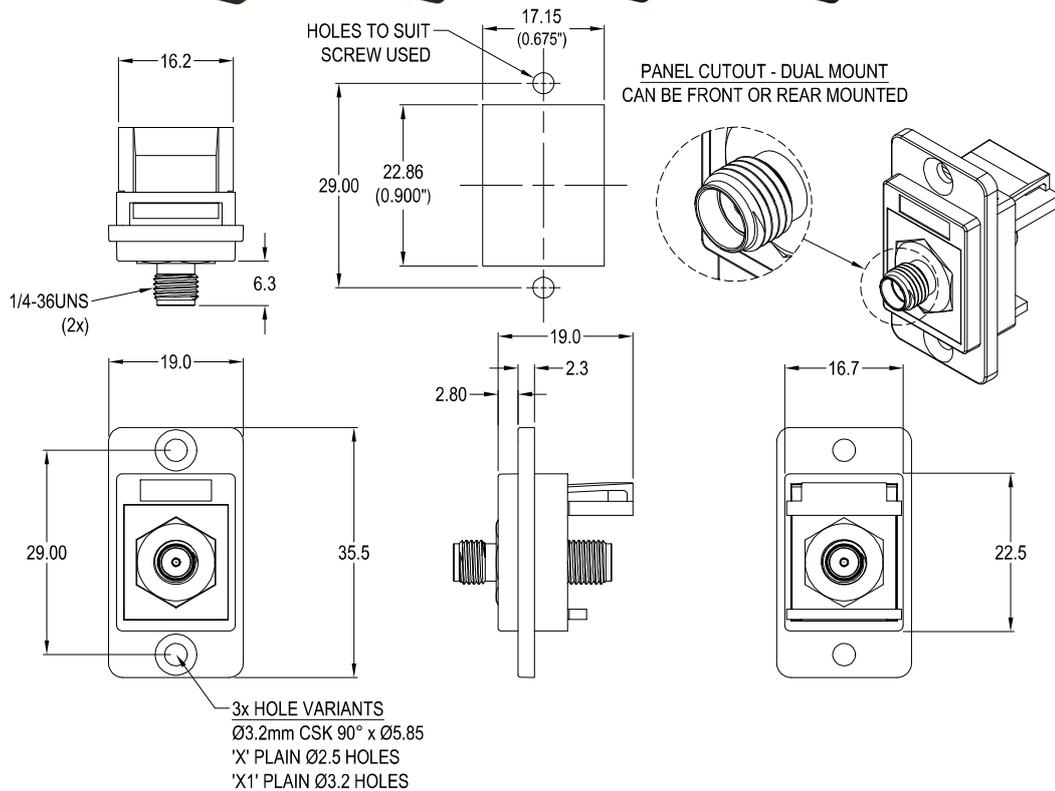

VARIANTS

Part No.

- CP30760** DUALSLIM SMA (F-F) 50Ω Black plastic frame, CSK holes
- CP30760X** DUALSLIM SMA (F-F) 50Ω Black plastic frame, Ø2.5 PLAIN holes
- CP30760X1** DUALSLIM SMA (F-F) 50Ω Black plastic frame, Ø3.2 PLAIN holes

Feedthrough Features

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options.
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile.

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Body: Brass, Gold plated
2. Insulation: Teflon
3. SMA Pin A+B: Brass, Gold plated
4. Nut: Brass, Gold plated
5. Frame: ABS UL94-V2
6. FT Frame: PA66 UL94-V2

Specification

- Impedance: 50 Ohm
- Frequency: 10MHz - 18GHz
- Operating Temp: -30°C to 80°C
- Plug A: Female SMA
- Plug B: Female SMA

