


Reference Drawing

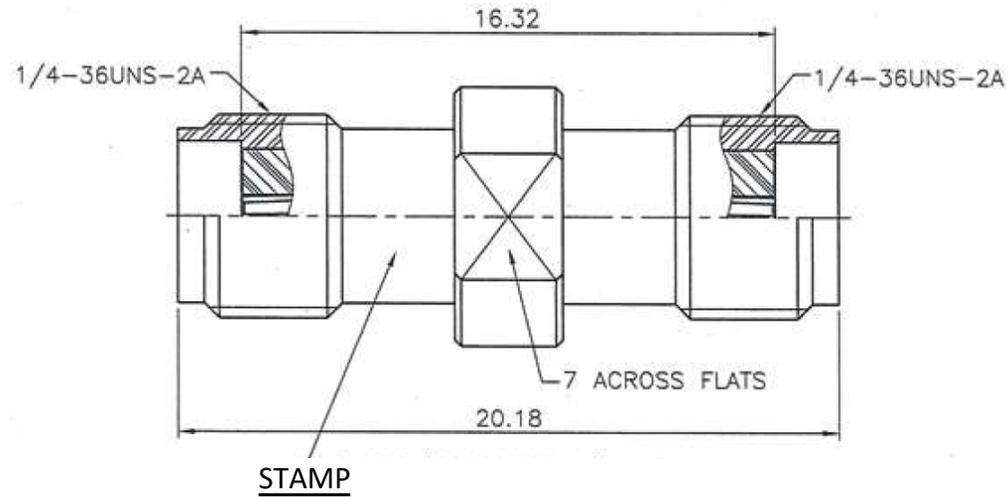

SPECIFICATIONS

IMPEDANCE : 50ohm FREQUENCY RANGE : DC~26.5GHz

V.S.W.R. : 1.18 MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 Vrms Min.

| | | |
|-------------------|---|------------|
| R o H S Compliant | | Cd ≤ 75ppm |
| REMARKS | BRASS: Cd ≤ 75ppm PHOSPHOR BRONZE: Pb < 4wt% | |

| MATERIAL TABLE | | |
|----------------|------------------|---------------|
| DESCRIPTION | MATERIAL | FINISH |
| CONTACT PIN | BERYLLIUM COPPER | Cu / NiP / Au |
| INSULATOR | PTFE | WHITE |
| BODY | STAINLESS STEEL | PASSIVATED |

| | | |
|--------------------|----------------|------------------|
| SCALE NONE | | PART NUMBER |
| UNIT mm | | SMAP-A-JJ-265 |
| DATE 2025/10/10 | PROJECTION | TO-CONNE CO.,LTD |