


# Reference Drawing

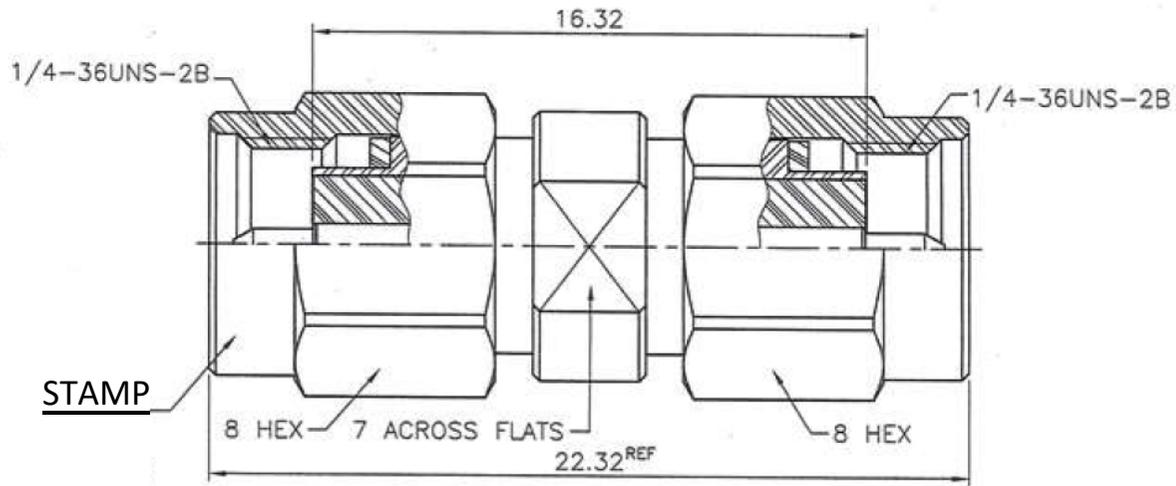

## SPECIFICATION

IMPEDANCE : 50ohm

FREQUENCY RANGE : DC~26.5GHz

V.S.W.R. : 1.18 MAX.

DIELECTRIC WITHSTANDING VOLTAGE : 1000 Vrms Min.

MATERIAL TABLE		
DESCRIPTION	MATERIAL	FINISH
SHELL	STAINLESS STEEL	PASSIVATED
GASKET	SILICONE	RED
C RING	BERYLLIUM COPPER	NONE
CONTACT PIN	BERYLLIUM COPPER	Cu / NiP / Au
INSULATOR	PTFE	WHITE
BODY	STAINLESS STEEL	PASSIVATED

R o H S Compliant		Cd ≤ 75ppm
REMARKS	BRASS: Cd ≤ 75ppm PHOSPHOR BRONZE: Pb < 4wt%	

SCALE	NONE		PART NUMBER
UNIT	mm		SMA-A-PP-265
DATE	2025/10/20	PROJECTION	TO-CONNE CO.,LTD