


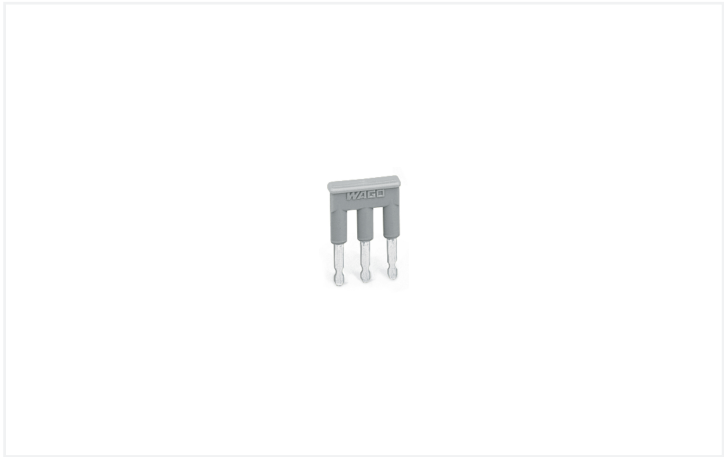

Color: ■ gray

Electrical data

Ratings per IEC/EN	
Rated current	15 A

Physical data

Width	12 mm / 0.472 inches
Height	3.89 mm / 0.153 inches
Jumper assignment	1-2-3

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Fire load	0.007 MJ
Weight	1 g

Commercial data

PU (SPU)	200 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918610445
Customs tariff number	85366990990



Product Classification	
UNSPSC	39121421
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 9.0	EC000489
ETIM 10.0	EC000489
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 279-483

↓

Documentation				
Bid Text				
279-483	19.02.2019	xml	2.54 KB	↓
279-483	27.04.2017	doc	23.50 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 279-483	WSCAD Universe 279-483
↓	↓
	ZUKEN Portal 279-483
	↓


1 Compatible Products
1.1 Optional Accessories
1.1.1 Tool
1.1.1.1 Operating tool



Item No.: 279-433
Operating tool; made of insulating material; 3-way

Installation Notes

Commoning




Commoning using comb-style jumper bars.
Push comb-style jumper bars down until fully inserted.

Commoning




4-conductor through terminal blocks, angled type,
formation of groups with 3-way, comb-style jumper bars

Commoning



Carrier terminal blocks with component plugs,
alternate comb-style jumper bars,
3-way comb-style jumper bar

Commoning



Commoning front-entry disconnect terminal blocks via comb-style jumper bar using a 10-pole operating tool