


Data Sheet | Item Number: 770-503/023-000

Strain relief housing; 3-pole; for 2 cables; 4.5 ... 8.0 mm; 55 mm; black

<https://www.wago.com/770-503/023-000>



Color: ■ black

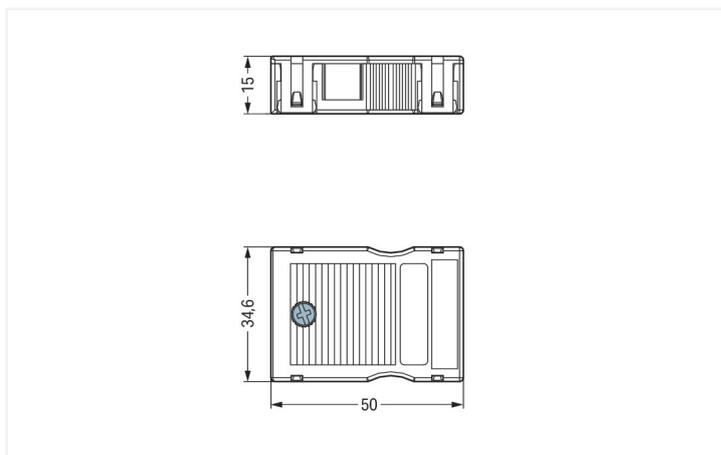

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 3-pole

The strain relief housing from the *WINSTA*® MIDI product line guarantees you the greatest possible flexibility in electrical installation. A comprehensive range of accessories rounds out the *WINSTA*® product line from WAGO. The *WINSTA*® MIDI product line guarantees flexibility for the installation. Through its Push-in CAGE CLAMP® spring pressure connection technology, it achieves error-free, time-saving installation and offers flexibility and customization for meeting all installation requirements. The strip length is 55 mm.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Choose durability and quality – with protection against mismatching from WAGO makes the installation of electrical components substantially easier.

- simple circuits
- quick replacement of defective units during ongoing operation

Connection data

Connection 1

Pole number	3
Connectable sheathed cable diameter	4.5 ... 8 mm
Strip length (outer insulation)	55 mm

Physical data

Pin spacing	10 mm / 0.394 inches
Width	34.6 mm / 1.362 inches
Height	15.2 mm / 0.598 inches
Depth	50 mm / 1.969 inches

Mechanical data

Screw tightening torque	0.5 Nm
-------------------------	--------

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.279 MJ
Weight	10.3 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918057516
Customs tariff number	39269097900

Product Classification

UNSPSC	39121722
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 9.0	EC002863
ETIM 10.0	EC002863
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171

Approvals for marine applications



Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-503/023-000	↓
--	---

Documentation

Bid Text

770-503/023-000	19.02.2019	xml 2.74 KB	↓
770-503/023-000	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 770-503/023-000	↓
---------------------------------	---

CAE data

EPLAN Data Portal 770-503/023-000	↓
WSCAD Universe 770-503/023-000	↓
ZUKEN Portal 770-503/023-000	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

1.1.2 Shield termination

1.1.2.1 Shield termination



Item No.: 770-523

Shield connecting plate; 3-pole; for sockets and plugs; silver-colored