

24

2436 03



USB and IEEE 1394 connectors



USB 3.1 chassis socket type C, 24 poles, angular version,  
for printed circuit boards, surface mounting technology  
(SMT/THR), for mid-mount placement

24

2436 03

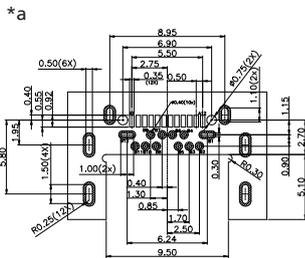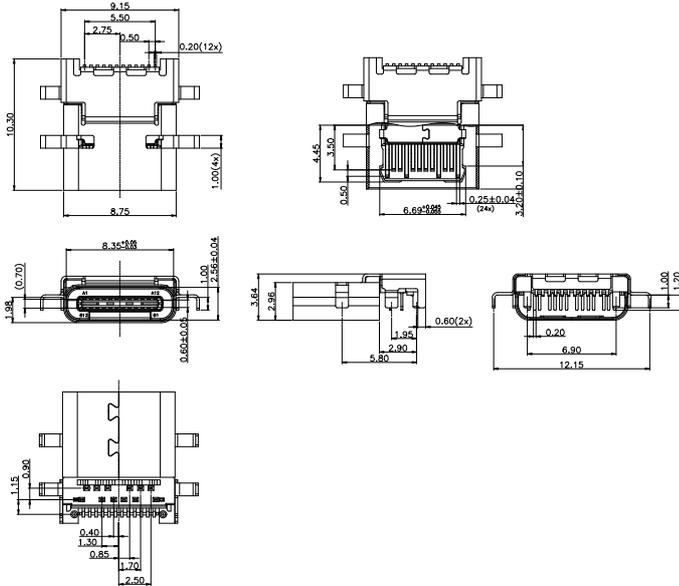

**\*b**

Signal Name	Signal Name	Signal Name	
A1	GND	B12	GND
A2	SSTxp1	B11	SSRXp1
A3	SSTxn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTxn2
A11	SSRXp2	B2	SSTxp2
A12	GND	B1	GND

### Environmental conditions

Temperature range -20 °C/+70/85 °C

### Materials

Insulating body LCP, V-0 according to UL94  
 Contact spring Cu alloy, gold-plated in mating area, pre-nickel and tin-plated in solder area  
 Housing steel, nickel-plated

### Mechanical data

Mating cycles 10000  
 Insertion force 5–20 N  
 Withdrawal force 8–20 N<sup>1</sup>

<sup>1</sup> initial value

### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance ≤ 40 mΩ  
 Rated current 5 A/125 A/0.25 A  
 Rated voltage 20 V  
 Rated impulse voltage 100 V/60 s  
 Insulation resistance ≥ 100 MΩ

### Associated products

Counterparts  
 ↗ 2483 01

\*a printed circuit board layout, components side view

\*b pin assignment

24

2436 03

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
2436 03	24	1000	1000

**Packaging:**

on reel