

292303-4 ✓ ACTIVE


TE Internal #: 292303-4

A, Standard USB, 2.0, Receptacle, 4 Position, Top Mount, 1 Port,
Right Angle, Box & Tube / Tube, Flush, Through Hole - Solder,
Cable-to-Board

[View on TE.com >](#)



Connectors > Audio & Video Connectors > USB Connectors

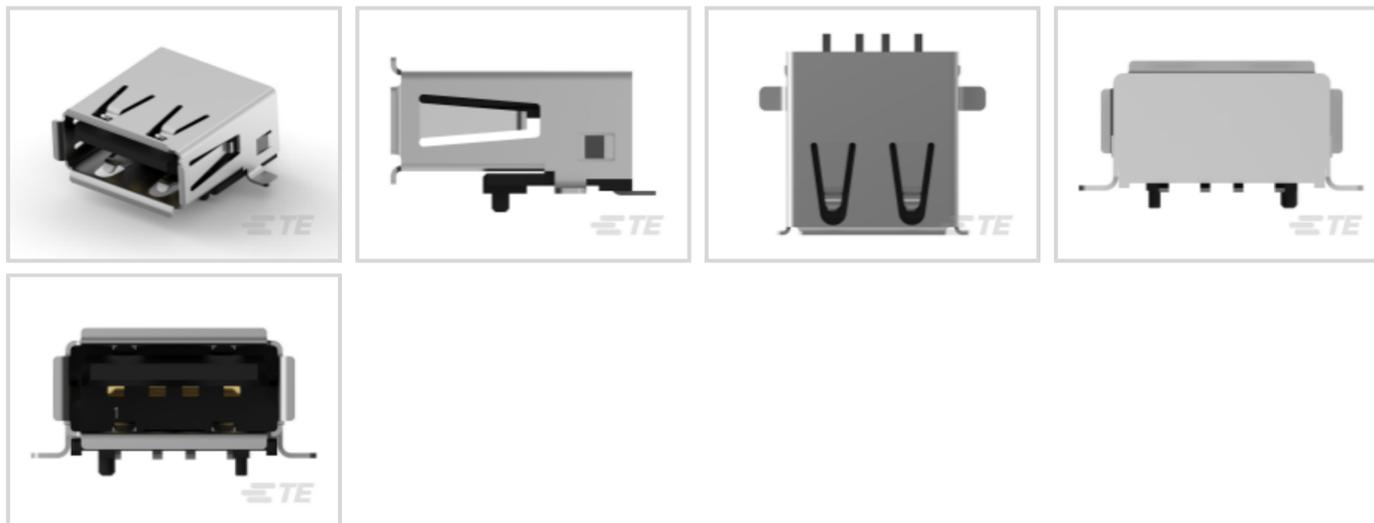

USB Type: A

USB Version: 2.0

Connector Profile: **Standard**

Connector & Housing Type: **Receptacle**

Number of Ports: 1

Features

Product Type Features

USB Type	A
USB Version	2.0
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Mounting Legs	2
Number of Ports	1
Number of Positions	4

Body Features

Shell Plating Finish	Bright
Shell Plating Material	Tin
Connector Profile	Standard

Contact Features

--	--



Contact Underplating Material	Palladium Nickel
Contact Mating Area Plating Material Thickness	.76 μm [30 μin]
Contact Mating Area Plating Material	Gold or Gold Flash
Contact Current Rating (Max)	1 A

Termination Features

Termination Post & Tail Length	2.84 mm[.112 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Locking Feature	With
PCB Mount Location	Top Mount
PCB Connector Seating	Flush
PCB Mount Retention Type	Kinked Legs
Panel Mount Feature Type	Flange
Connector Mounting Type	Board Mount

Housing Features

Housing Color	Black
Housing Material	Thermoplastic
Body Orientation	Right Angle
Centerline (Pitch)	2 mm, 2.5 mm[.078 in][.098 in]

Dimensions

PCB Thickness (Recommended)	1.57 mm[.062 in]
-----------------------------	------------------

Usage Conditions

Soldering Temperature (Max)	260 $^{\circ}\text{C}$ [500 $^{\circ}\text{F}$]
Mating Cycles (Max)	1500
Operating Temperature Range	-55 – 85 $^{\circ}\text{C}$ [-67 – 185 $^{\circ}\text{F}$]

Operation/Application

Halogen Free	No
Circuit Application	Power & Signal

Industry Standards

Moisture Sensitivity Level	1
UL Flammability Rating	UL 94V-0

Packaging Features



Packaging Quantity	30
Packaging Method	Box & Tube, Tube

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	有害物质含量符合标准要求 No Restricted Substance(s) Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2025 (250) Candidate List Declared Against: JUNE 2025 (250) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 1487599-1
USB, A-BLUNT,28/28,BLK,0.83M



TE Part # 1487593-2
USB, A-BLUNT,28/24,WHT,1.5M



TE Part # 1-1734028-3
Std USB, Type A, Plug



TE Part # 1496476-1
STD USB-A TO MINI-B ASSY, 1M



TE Part # 1487593-1
USB, A-BLUNT,28/24,WHT,2.0M




TE Part # 1-1734028-1
Std USB, Type A, Plug, Natural



TE Part # 1487600-1
USB, A-BLUNT,28/26,BLK,1.0M




TE Part # 1734028-1
Std USB Type A, Plug, Natural



TE Part # 2142872-1
cable assy, usb a plug to 5p hsg




TE Part # 1827525-1
MECHATROLINK II CONNECTOR KIT



TE Part # 1929690-1
USB CABLE, USB A to Mini USB,Blue


Customers Also Bought



TE Part #A97023-000
WP-165102-10-9




TE Part #812255-SF
FN9290-1-06



TE Part #5-208875-1
RECEPT ASSY,62 POSN,AMPLIMITE



TE Part #5-520315-6
TRIOMATE ASSY V 6P L=3.556LDFR



TE Part #826647-3
3P AMPMODU II STIFT LEI



TE Part #2-826656-8
28P AMPMODU II STIFT LEI



TE Part #2-1617813-1
TD229-1203P= TDFR 120SEC M83726 /29-1203P



TE Part #2-1879353-6
RR02 5% 47K AMMO



TE Part #5-2176088-4
RP 1J 0.166W 3K16 0.1% 25PPM 1K RL



TE Part #2357739-1
16G,05FH,REC,220PIN,4H,Hard Tray

Documents



Product Drawings

[Std USB Type A, R/A, T/H](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_292303-4_F.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_292303-4_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_292303-4_F.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English