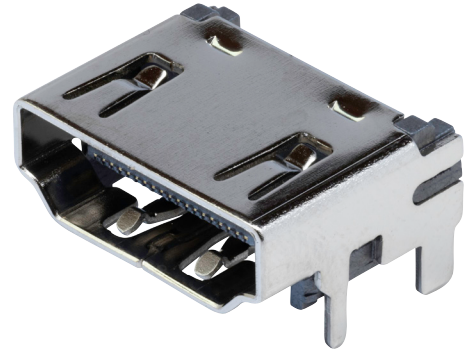


**MODEL:** HD05-19-TH-TR | **DESCRIPTION:** HDMI RECEPTACLE**FEATURES**

- HDMI 2.0
- 19 position
- tape & reel packaging
- reflow solder compatible

**SPECIFICATIONS**


| parameter                       | conditions/description               | min      | typ    | max        | units      |
|---------------------------------|--------------------------------------|----------|--------|------------|------------|
| HDMI standard                   | HDMI 2.0                             |          |        |            |            |
| rated voltage                   |                                      |          |        | 40         | Vac        |
| rated current                   |                                      |          |        | 0.5        | A          |
| contact resistance <sup>1</sup> | between terminals and mating plug    |          |        | 30         | mΩ         |
| insulation resistance           | at 500 Vdc                           | 100      |        |            | MΩ         |
| voltage withstand               | for 1 minute                         |          | 500    |            | Vac        |
| insertion force                 |                                      |          |        | 4.5        | kgf        |
| withdrawal force                | 0~2,000 cycles<br>2001~10,000 cycles | 1<br>0.5 |        | 4.0<br>4.0 | kgf<br>kgf |
| life                            |                                      |          | 10,000 |            | cycles     |
| operating temperature           |                                      | -25      |        | 85         | °C         |
| flammability rating             | UL94V-0                              |          |        |            |            |
| RoHS                            | yes                                  |          |        |            |            |

Note: 1. When measured at 20 mV / 100 mA.  
2. All specifications measured at 10~35°C, humidity at 45~85%, under standard atmospheric pressure, unless otherwise noted.

**SOLDERABILITY**

| parameter                     | conditions/description      | min | typ | max | units |
|-------------------------------|-----------------------------|-----|-----|-----|-------|
| reel storage                  | at relative humidity 65~70% | 25  |     | 30  | °C    |
| reflow soldering <sup>3</sup> | see reflow profile          |     | 255 | 260 | °C    |


Note: 3. It is recommended to reflow solder within 3 months from opening vacuum packaging at a temperature of 25~30°C & relative humidity 65~70%.

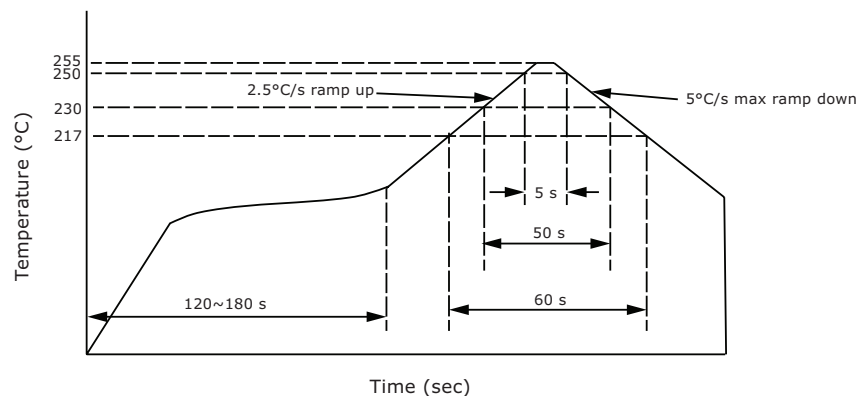

MECHANICAL DRAWING

units: mm  
tolerance:  
X.  $\pm 0.50$  mm  
X.X  $\pm 0.30$  mm  
X.XX  $\pm 0.20$  mm  
X.XXX  $\pm 0.10$  mm  
unless otherwise specified

| DESCRIPTION | MATERIAL      | PLATING/COLOR                                                              |
|-------------|---------------|----------------------------------------------------------------------------|
| insulator   | LCP [UL94V-0] | black                                                                      |
| contact     | brass         | contact area: gold<br>flash over nickel<br>solder area: tin over<br>nickel |
| shell       | brass         | nickel                                                                     |

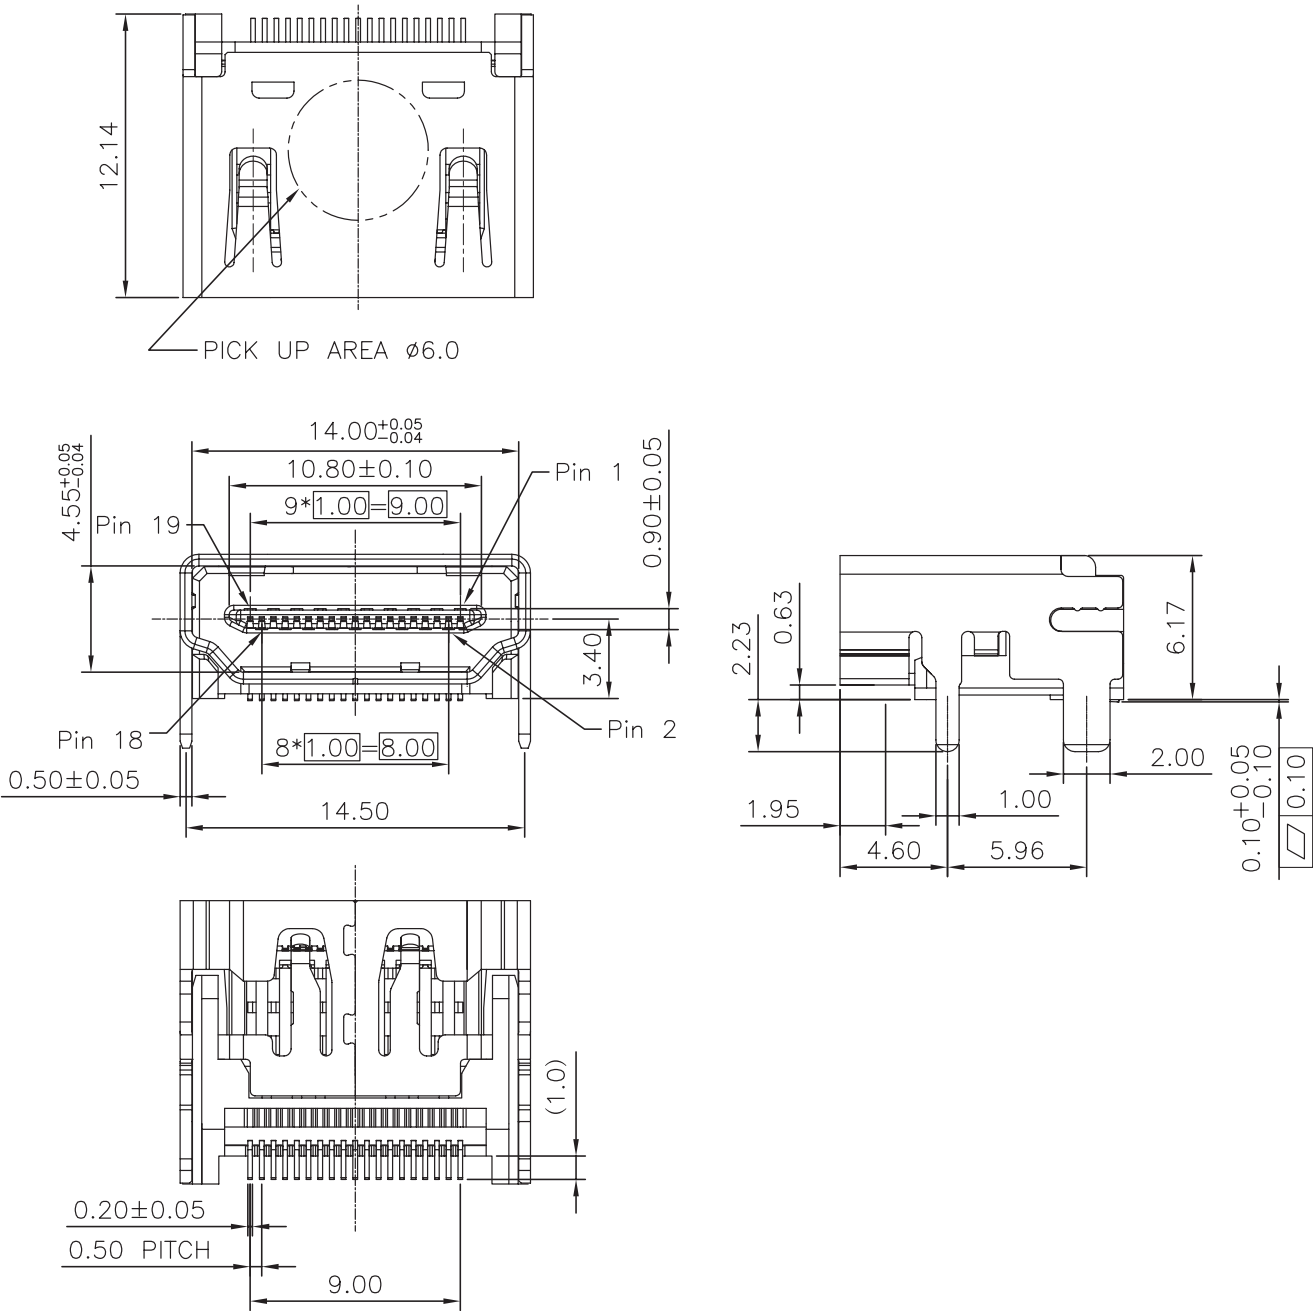




## PACKAGING

units: mm

Reel Size:  $\varnothing 330$  mm

Reel QTY: 450 pcs per reel

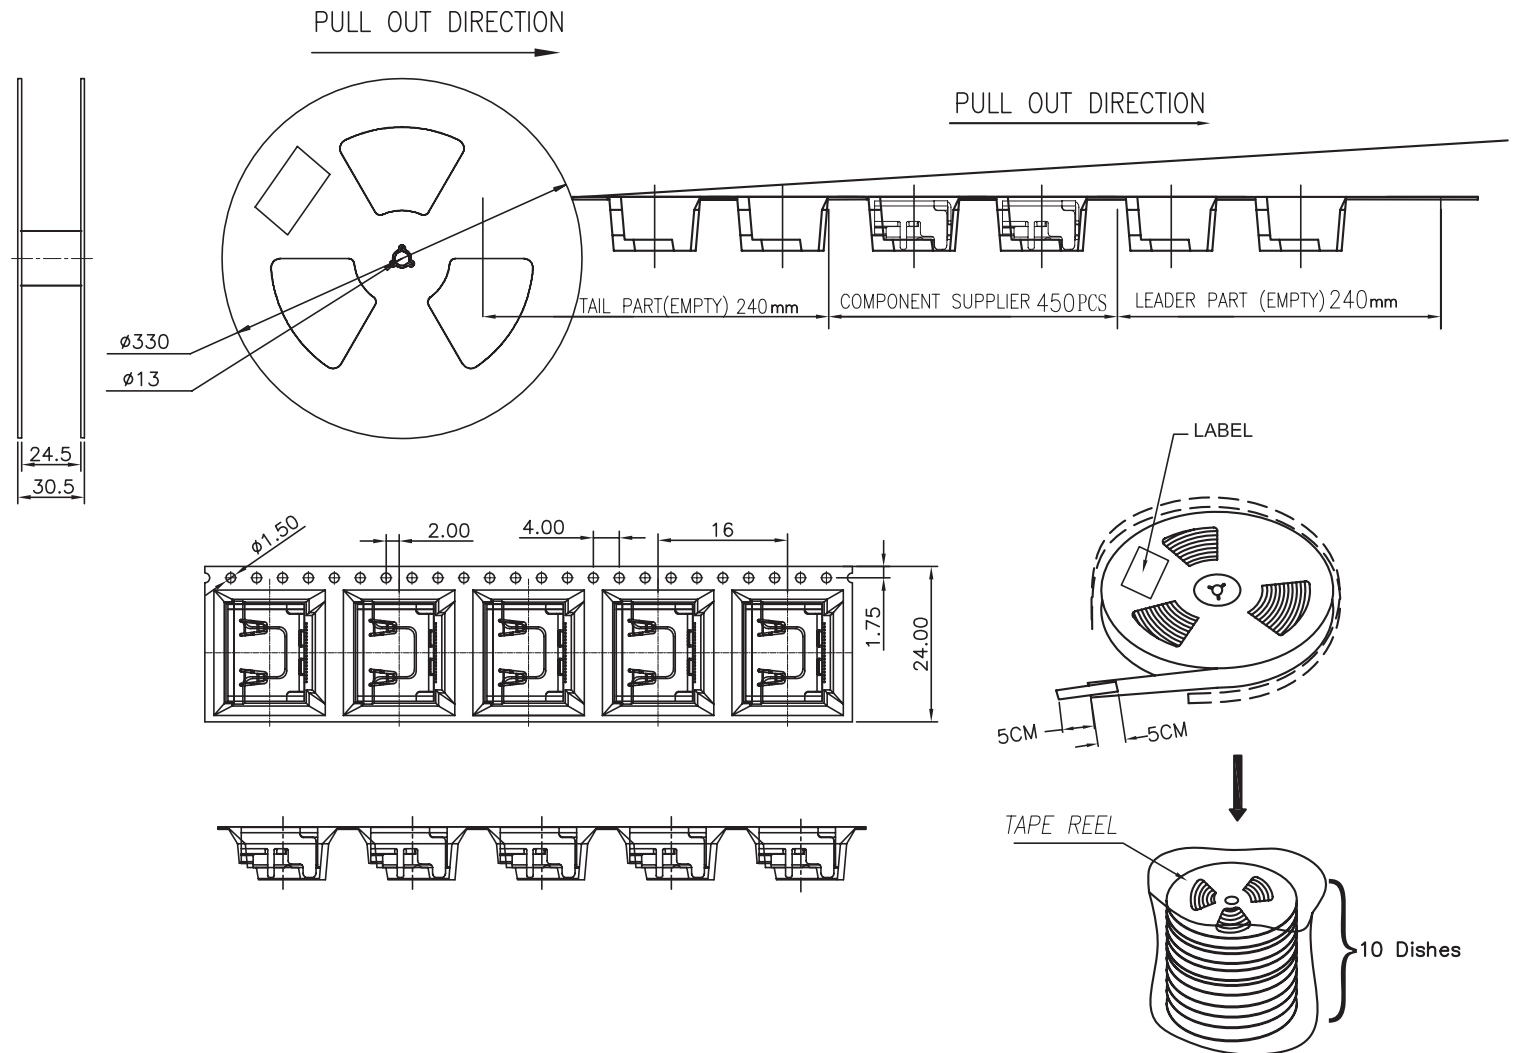

REVISION HISTORY

| rev. | description                       | date       |
|------|-----------------------------------|------------|
| 1.0  | initial release                   | 07/26/2023 |
| 1.01 | CUI Devices rebranded to Same Sky | 09/12/2024 |

The revision history provided is for informational purposes only and is believed to be accurate.



Same Sky offers a one (1) year limited warranty. Complete warranty information is listed on our website.

Same Sky reserves the right to make changes to the product at any time without notice. Information provided by Same Sky is believed to be accurate and reliable. However, no responsibility is assumed by Same Sky for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

Same Sky products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**sameskydevices.com**