


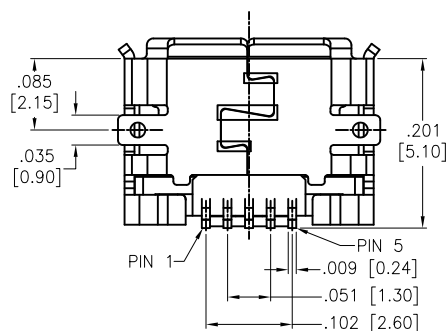
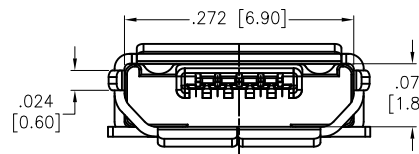
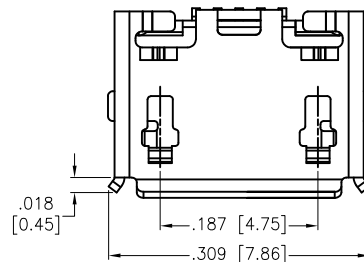


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	02/15/12	
A		REDRAWN	02/17/12	
B		UPDATED DRAWING	9/21/17	HR/RC1

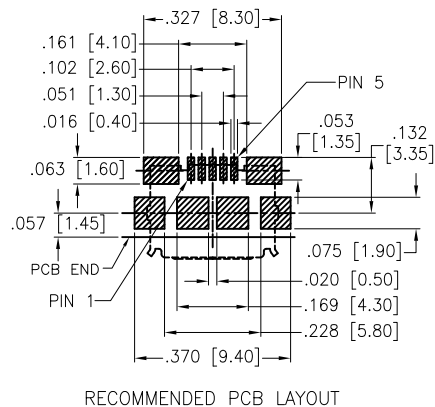

SPECIFICATIONS:

Material:

Insulator: LCP, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Shell: Stainless Steel, Matte Tin plated

Plating:

Gold Flash over Nickel underplate on contact area,

Gold Flash over Nickel underplate on solder tails

Electrical:

Contact resistance: 30 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 100 VAC for 1 minute

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
INCHES		HOLES		TITLE MICRO USB, TYPE B, SINGLE PORT RIGHT ANGLE, SMT, TAPE AND REEL			
.X	± .10	Ø.X	± .10	SIZE	PART NO.	REV.	
.XX	± .020	Ø.XX	± .015	X	MCR-B-S-RA-TSMT-NP-CS2-T/R	B	
.XXX	± .015	Ø.XXX	± .010	REF:	S00015C	SCALE:	NTS
APPROVALS		DATE		SHEET 1 OF 1			
DRAWN	TW	02/15/12					
CHECKED	AY	02/15/12					
APPROVED							