

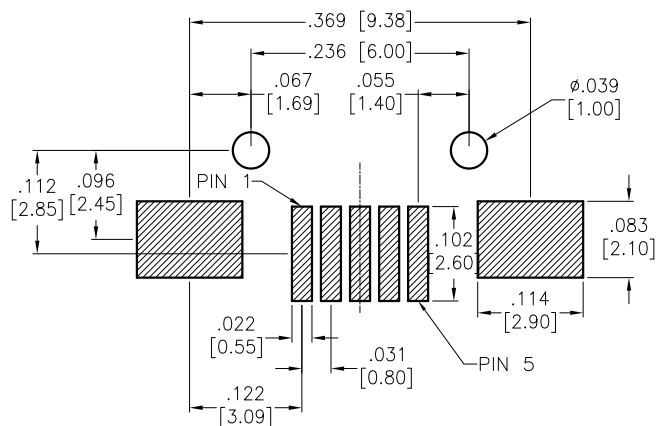


APPROVED: _____
 DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	2/27/18	

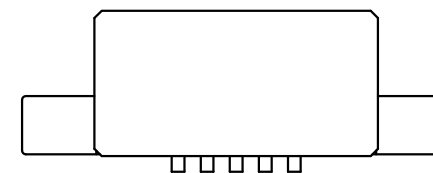

RECOMMENDED P.C.B LAYOUT

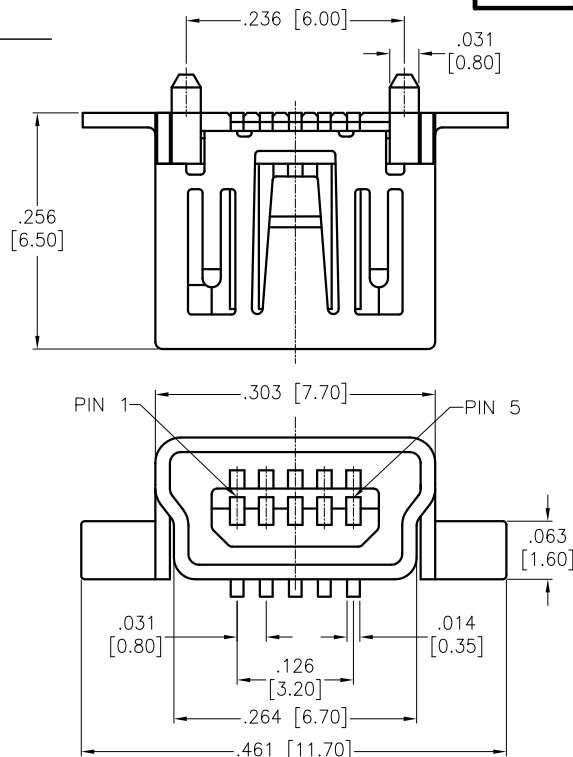

WITH CAP

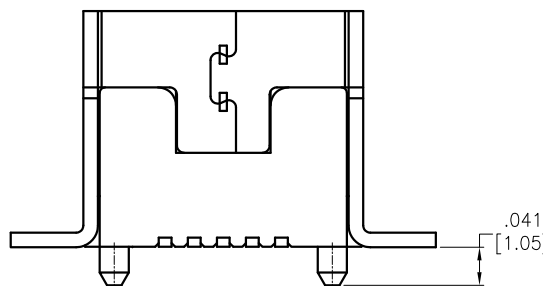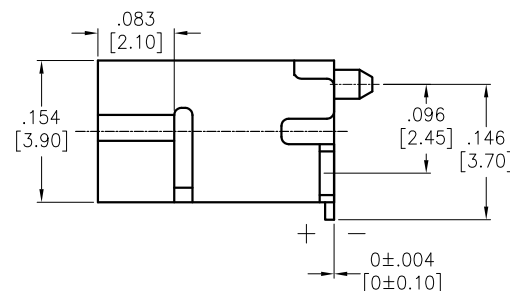

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Brass, Nickel Plated

Plating:

10u" Gold over Nickel underplate on contact area,
 Tin over Copper underplate on solder tails

Electrical:

Current Rating: 2A
 Contact resistance: 50 Mohms max
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500V AC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ±.10 .XX ± .020 Ø.XX ±.015 .XXX ± .015 Ø.XXX ±.010		ADAM TECH INTERCONNECTS		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS		DATE		TITLE MINI USB, TYPE B, 5PIN, VERTICAL, TRUE SMT	
DRAWN	AY	2/27/18			
CHECKED	YC	2/27/18		SIZE X	
APPROVED				PART NO. MUSB-B5-S-VT-TSMT-CS1-10-PP-T/R	
				REV. -	
		REF: S00275T		SCALE: NTS	
				SHEET 1 OF 1	