

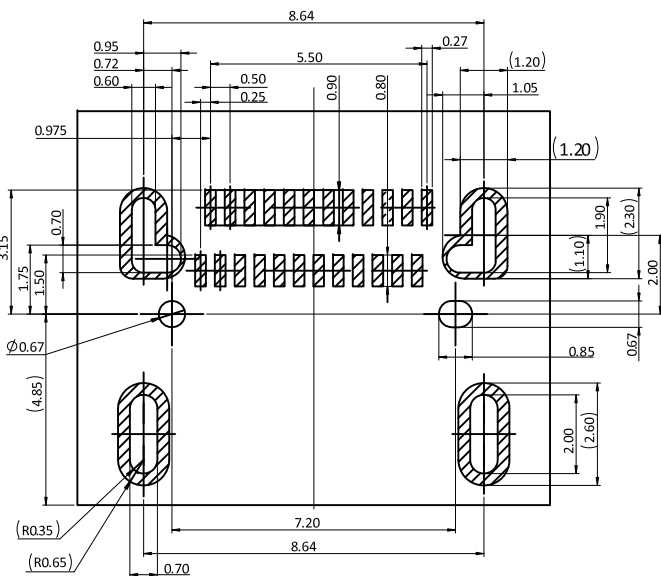
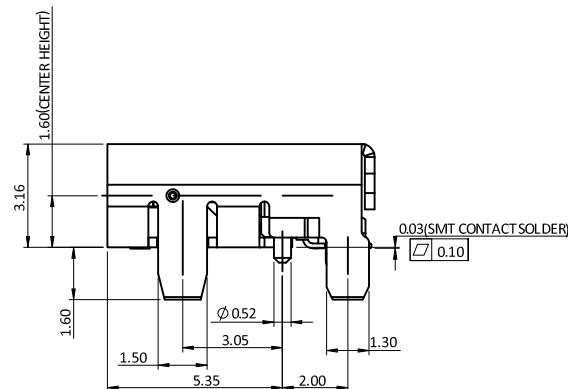
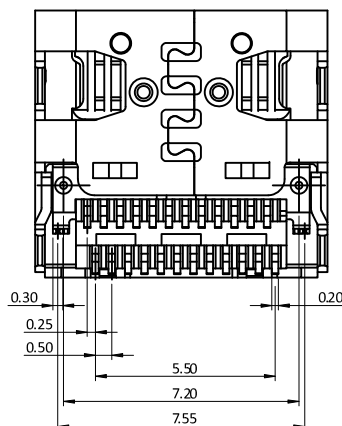


APPROVED: _____
 DATE: _____ TITLE: _____

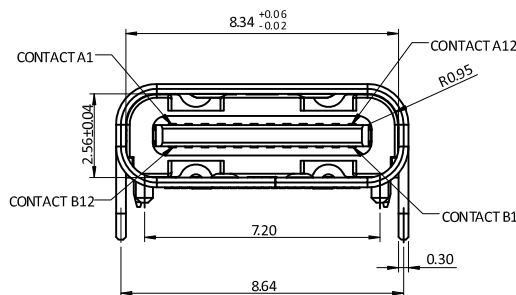

RECOMMENDED PCB LAYOUT

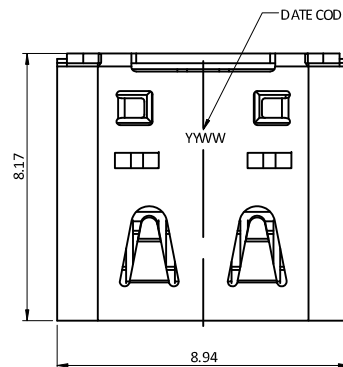

SPECIFICATIONS:

Material:

Insulator: Hi-Temp Thermoplastic, rated UL 94V-0, Color: Black

Contacts: Brass

Shell: Stainless Steel, Nickel plated

Plating:

30u" Gold over Nickel underplate on contact area,

Matte Tin over Nickel underplate on solder tails

Electrical:

Voltage rating: 20V

Current rating: 5A

Contact resistance: 40 mohms max for Initial

Insulation resistance: 100 Mohms min @100 VDC

Dielectric withstanding voltage: 100 VAC For 1 Minute

Mechanical:

Durability: 10,000 Cycles

Temperature Rating:

Operating temperature: -20°C to +85°C

Environmental:

Lead free, RoHS compliant.



PACKAGED ON TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS. TOLERANCES: EXCEPT AS NOTED

	MM	ANGLE
X.	± .50	± 5°
.X	± .30	
.XX	± .20	

DRAWN	LH	4/12/23
CHECKED	RC	4/12/23
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

ADAM TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

TITLE
 UNIVERSAL SERIAL BUS, TYPE C 4.0, FEMALE,
 RIGHT ANGLE, 30" GOLD PLATED

SIZE X	PART NO. USB-C40-S-RA-CS6-SMT-BK-30-T/R	REV. -
REF: S00013T	SCALE: NTS	SHEET 1 OF 1