

## USB Field™



# TABLE OF CONTENT

<b>About Amphenol Socapex</b>	<b>4</b>
Markets and applications	8
Other solutions and related documentations	9
Concept overview and benefits	10
USB standards and appropriate solutions	11
<b>USB3.2 GEN1</b>	<b>13</b>
USB3CFTV™	14
USB3FTV™	20
USB3FTV™ - Transversally sealed and hermetic receptacle	24
USB3FTV™ - Stand-off receptacle	27
USB3FTV™ - Reduced flange receptacle	29
USB3FTV™ - VG96949	31
USB3 Type A - Type C - Adapter	32
µCom-USB3.2 & TVµCom-USB3.2	37
µCom-USB3.2	38
TVµCom-USB3.2	40
<b>USB2.0</b>	<b>43</b>
USBFTV™	44
USBFTV™ - Transversally sealed and hermetic receptacle	49
USBFTV™ - Stand-off receptacle	44
USBFTV™ - Through-bulkhead receptacle	56
USBFTV™ - Receptacle with 360° EMI backshell	57
USBFTV™ - Atex Zone 2	58
USBBFTV	60
USBBFTV - Transversally sealed receptacle	64
USBBFTV - Stand-off receptacle	65
<b>CABLES AND CORDSETS</b>	<b>69</b>
USB3.2 Gen1 cable and cordset	70
USB2.0 cable and cordset	71
<b>ADAPTORS AND ACCESS POINTS</b>	<b>73</b>
Composite USB3.2 Gen 1 access point	74
USB3.2 Gen1 and USB2.0 access point	77
Composite USB2.0 access point	79
USB2.0 to type EN3646 - PT/451 - ABS1547 adaptor	84
<b>RUGGED ELECTRONICS</b>	<b>86</b>
USB3CFTV Memory key	87
USB3FTV™ Memory key	88
USB3FTV™ Memory key high capacity	89
ROK - Rugged Oval Key	91
USB3FTV™ - USB3.2 Gen 1 amplifier	92
USBFTV™ - USB2.0 amplifier	95

# TABLE OF CONTENT

<b>ACCESSORIES</b>	<b>99</b>
Standard protective cap - USBFTV™	100
Silicone protective cap - TVμCom-USB3.2	101
Self-closing cap - USBFTV™	102
Accessories - μCom-USB3.2	103
Accessories - TVμCom-USB3.2	104
Panel gasket and tool	105
<b>ASSEMBLY INSTRUCTIONS</b>	<b>108</b>
USB3FTV™	109
USBFTV™ and USBBF TV	111
<b>HOW TO ORDER</b>	<b>114</b>
USB3CFTV™ - Plug and receptacle	115
USB3FTV™ - Plug and receptacle	116
USB3FTV™ - Transversally sealed and hermetic receptacle	117
USB3FTV™ - VG96949	118
μCom-USB3.2 & TVμCom-USB3.2	119
USBFTV™ - Plug and receptacle	121
USBFTV™ - Transversally sealed and hermetic receptacle	122
USBFTV™ - Atex Zone 2	123
USBBFTV™ - Plug and receptacle	124
USBBFTV™ - Transversally sealed receptacle	125
Cable	126
Cordset	127
Composite USB3.2 Gen 1 access point	128
USB3CFTV Memory Key	129
USB3FTV™ Memory Key	130
ROK - Rugged Oval Key	131
USB3FTV™ - USB3.2 Gen 1 amplifier	132
Standard protective cap	133
Standard protective cap - TVμCom-USB3.2	134
Silicone protective cap - TVμCom-USB3.2	135

# OUR COMPANY



## Proven excellence in interconnect solutions

- Since **1947**, Amphenol Socapex has prescribed, designed and manufactured reliable and innovative interconnection solutions for harsh environments, specializing in standard and customized electrical and fiber optic connectors, contacts, accessories and cabling solutions.
- Located in the **Mont Blanc region** of France and Pune in India, Amphenol Socapex serve customers in over 100 countries around the world.
- Amphenol Socapex is part of the leading supplier of interconnect systems **Amphenol**.



**1400+**  
employees



**175 M€**  
Net Sales 2024  
75% Export - 25% France



Thyez, **France**  
Pune, **India**



## Our expertise has no boundaries

### Integrated Production in France & India

- 24 000 m<sup>2</sup> manufacturing capacity on 2 sites
- Design and manufacturing centers in France and India
- State-of-the-art manufacturing technology

## Our markets



**Defense**



**Commercial  
Aerospace**



**Space**



**Industry**



# TECHNOLOGIES & INNOVATION

## Engineering Laboratory



**Product testing and qualification expertise in many fields:**

- Environmental, mechanical, electrical, chemical, climatic skills
- RF and fiber optics expertise

## High-Speed Expertise



**Strong expertise in high-speed signals**

- 3D EM simulation software & EM models
- Time Domain and frequency domain

## Materials Expertise



**Focus on materials expertise and manufacturing techniques to produce faster, smaller and stronger products**

- Advanced technology research and development: polymers, metals, platings, resins ...
- Cutting edge characterizations of interconnects: Radio Frequency, partial discharges ...
- 3D CAD mechanical software, simulation & analysis

## Eco-responsibility



**Sustainable environment approach, with pro-active management of regulations (REACH / RoHS / Conflict minerals...)**

- New materials development, plating, and suitable processes
- Recycling and rational resources consumption

## Our workshops



Our workshops located in France & India provide consistent quality adapted to your volume requirements.

**Automation & Tooling :** Tools for our different activities : molding, machining, assembly

**Molding :** Solid expertise in thermoplastic elastomer and thermoset molding

**Machining :** Manufacturing of cylindrical shells and rectangular shells

**Screw Machining :** Manufacturing of electrical contacts

**Plating :** Plating with cadmium, nickel, electroless nickel, silver, black zinc nickel, gold

**Assembly :** Connector and harness assembly (electrical & optical)

## Our certifications

Product certifications : MIL-DTL38999, EN3645, EN3155, VG (VG95328, VG95319, VG96944, VG95218, VG96949)



Certified Management System



Certified Management System



Certified Management System



Certified Management System

## Our memberships

Member of CMG (Connecting Manufacturing Group) Consortium



CONVERSION & TRANSFERT


# CUSTOMER EXPERIENCE



## Service

► We have a strong reputation for helping customers solve their toughest challenges. This approach of serving your needs is ingrained in our company - from our sales team to our product development engineers.

## A partner you can trust

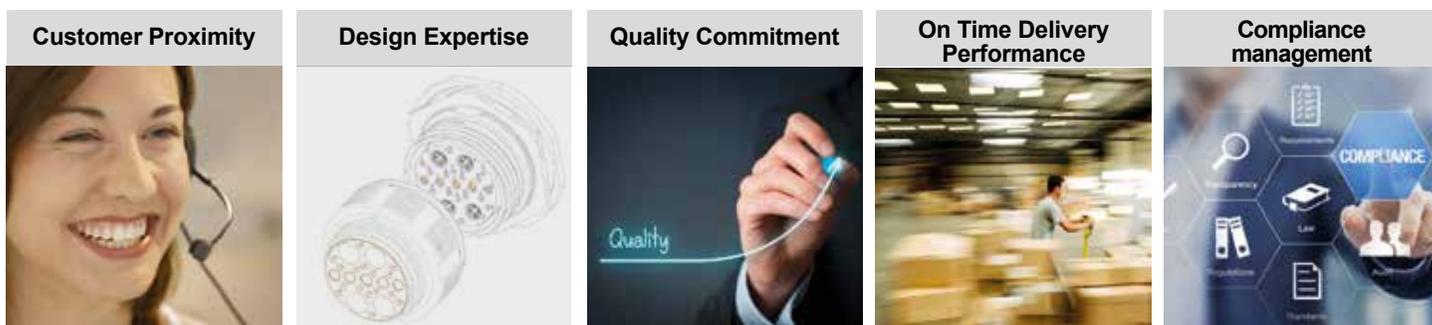

## Buy our solutions

You can access our solutions through our global network of sales offices or through our distributors.

### Field Sales Team :

-  10 in France
-  15 in Europe
-  100+ in North America and rest of the world.
-  5 Business Development Managers supporting local sales force Europe, North America and the rest of the world

-  **Technical Advisement & Multilingual Customer Service :**  
20 people

### Worldwide Distribution Network :

Our range of circular connectors, contacts, fiber optic connectors, PCB connectors and accessories are available thru our extensive distribution network.

It includes qualified distributors (QPL approved) for assembling MIL-DTL-38999 & derivatives and PT/451 (VG95328) connectors.

[Check our product inventory](#)



[Product Selectors & 3D Files](#)



NEW



# OUR HISTORY

1947



- **Socapex creation** in Suresnes, France  
- 1<sup>st</sup> radio connector

1956-57



- **Manufacturing unit in Cluses** (74), France  
- Thomson-CSF becomes primary shareholder

Early 1960's




- 1<sup>st</sup> board level connectors: HE8  
- 1<sup>st</sup> "licence Bendix" manufactured connectors  
- SL Series

1973



**New factory in Thyez** (74) France with 250 people, 13 000m<sup>2</sup>

1975



Production of 38999 connectors

1986

**Amphenol**  
Socapex

**Amphenol** becomes primary shareholder

1995-96



- Expanded Beam connector  
- CTOS launch  
- Headquarters transferred to Thyez

2004



RJ Field launch, "Award" by RJ Field Electronica

2005



**New factory in Pune, India**

2010's



LuxBeam™ and HDAS launch

2014-2017



**New workshops :**  
- Cable Assembly & Contact Manufacturing workshop

2019



**Increased manufacturing capacity** with 2<sup>nd</sup> building in Pune, India

2022



Harness in the box solution launch

Today & tomorrow



**New technologies :**  
- Investment in automation & technical expertise



Amphenol SOCAPEX joins the "Convention des Entreprises pour le Climat".  
- Our goal: **to accelerate our transition to a more sustainable operation.**

# MARKETS AND APPLICATIONS



## Military vehicles

- Ground radios shelters
- Ground vehicles
- Battlefield
- Communication systems



## C5ISR

- Threat detection system
- Soldier wearable equipment
- Rugged computer & digital radio
- Satellite reception unit



## Military Avionics & Airframe

- Power unit
- Aircraft
- Radar
- Display unit
- Flight control system



## Commercial Avionics & Airframe

- Landing gear
- Cockpit
- Ground power supply
- Engine Flowmeter



## Missiles & UAVS

- Air missiles and UAVS
- Ground control station & launchers



## Naval

- Navigation guidance



## Industrial

- Automation
- Transportation
- Nuclear power station
- Robotics




# OTHER SOLUTIONS AND RELATED DOCUMENTATIONS

All our documentations are available in PDF format on our website : [www.amphenol-socapex.com](http://www.amphenol-socapex.com)



**Catalog RJ Field™**  
DOC-001041-ANG

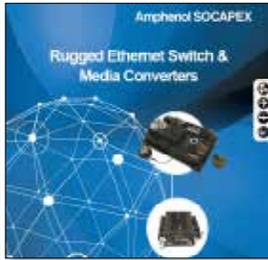

**Catalog Rugged Ethernet Switch and Media Converters**  
DOC-001034-ANG



**Brochure μCom-10Gb+**  
DOC-000015-ANG



**Brochure TV μCom-10Gb+**  
DOC-001014-ANG



**Brochure RJF TV Reduced Flange**  
DOC-001013-ANG



**Brochure USB3F TV Reduced Flange**  
DOC-001012-ANG



**Brochure MDP FTV**  
DOC-001025-ANG



**Brochure HDMI FTV**  
DOC-001036-ANG



**Brochure RJF 6A**  
DOC-001021-ANG



**Brochure RJF TV6A**  
DOC-001020-ANG



**Brochure μCom & TvμCom USB3.2 Gen1**  
DOC-001032-ANG



**Brochure USB3CFTV**  
DOC-001051-ANG



**Brochure USB3 FTV Amplifier / Extender**  
DOC-001054-ANG



**Brochure USB3AP**  
DOC-001058-ANG



**Brochure USB3CF TV Memory Keys**



**USB3 Type A - Type C - Adapter**

## CONCEPT OVERVIEW AND BENEFITS

# 5 TOP REASONS to use USBFIELD™

## # 1 Military. Ruggedized. Connectors

Our concept is simple : use standard, well-know, military connectors as MIL-DTL-38999 series III and MIL-DTL-26482 series I to reinforce standard industrial connectors as RJ45 or USB.



## # 2 No tool. No cabling. Easy mounting

Our USB solution enables you to use a standard USB cordset and mount itself without any cabling operation or tool.




## # 3 Electric continuity. Metallized inserts

Our solutions provide a total shiedling continuity per the metallisation of parts in the receptacle.



## # 4 Two codings. Only one reference

Our connectors, plugs and receptacles, can be configured in four different codings with the same reference.

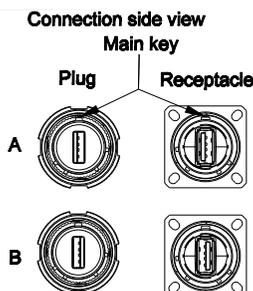

## # 5 Modifiable. Repairable. Removal inserts


Our parts can be changed as simply as the assembly, using a dedicated tool or simply by hands. This allows to remove the cordset, change the coding option or repair the solution.



# USB STANDARDS AND APPROPRIATE SOLUTIONS

	USB2.0	USB3.2 Gen1	USB3.2 Gen2
Data Rate	480 Mb/s	5 Gb/s	10 Gb/s
Voltage	5 V	5 V	5V
Current	1,5A	1,5A	1,5A
Power	2,5 W	2,5 W	2,5 W
Number of contacts	2 power 2 signal	2 power 6 signal	2 power 6 signal
Max cable length per USB standard	4,80 m	3 m	1 m

USB3CFTV™	✓	✓	✓
USB3FTV™	✓	✓	
USBFTV™	✓		
USBBFTV	✓	✓	
µCom & TVµCom USB3.2	✓	✓	✓
Cable and cordset	✓	✓	
Adaptor and access point	✓	✓	
USB3CFTV™ memory key	✓	✓	
USB3FTV™ memory key	✓	✓	
ROK - Memory key	✓	✓	
USBFTV™ - USB3.2 amplifier	✓	✓	
USBFTV™ - USB2.0 amplifier	✓		

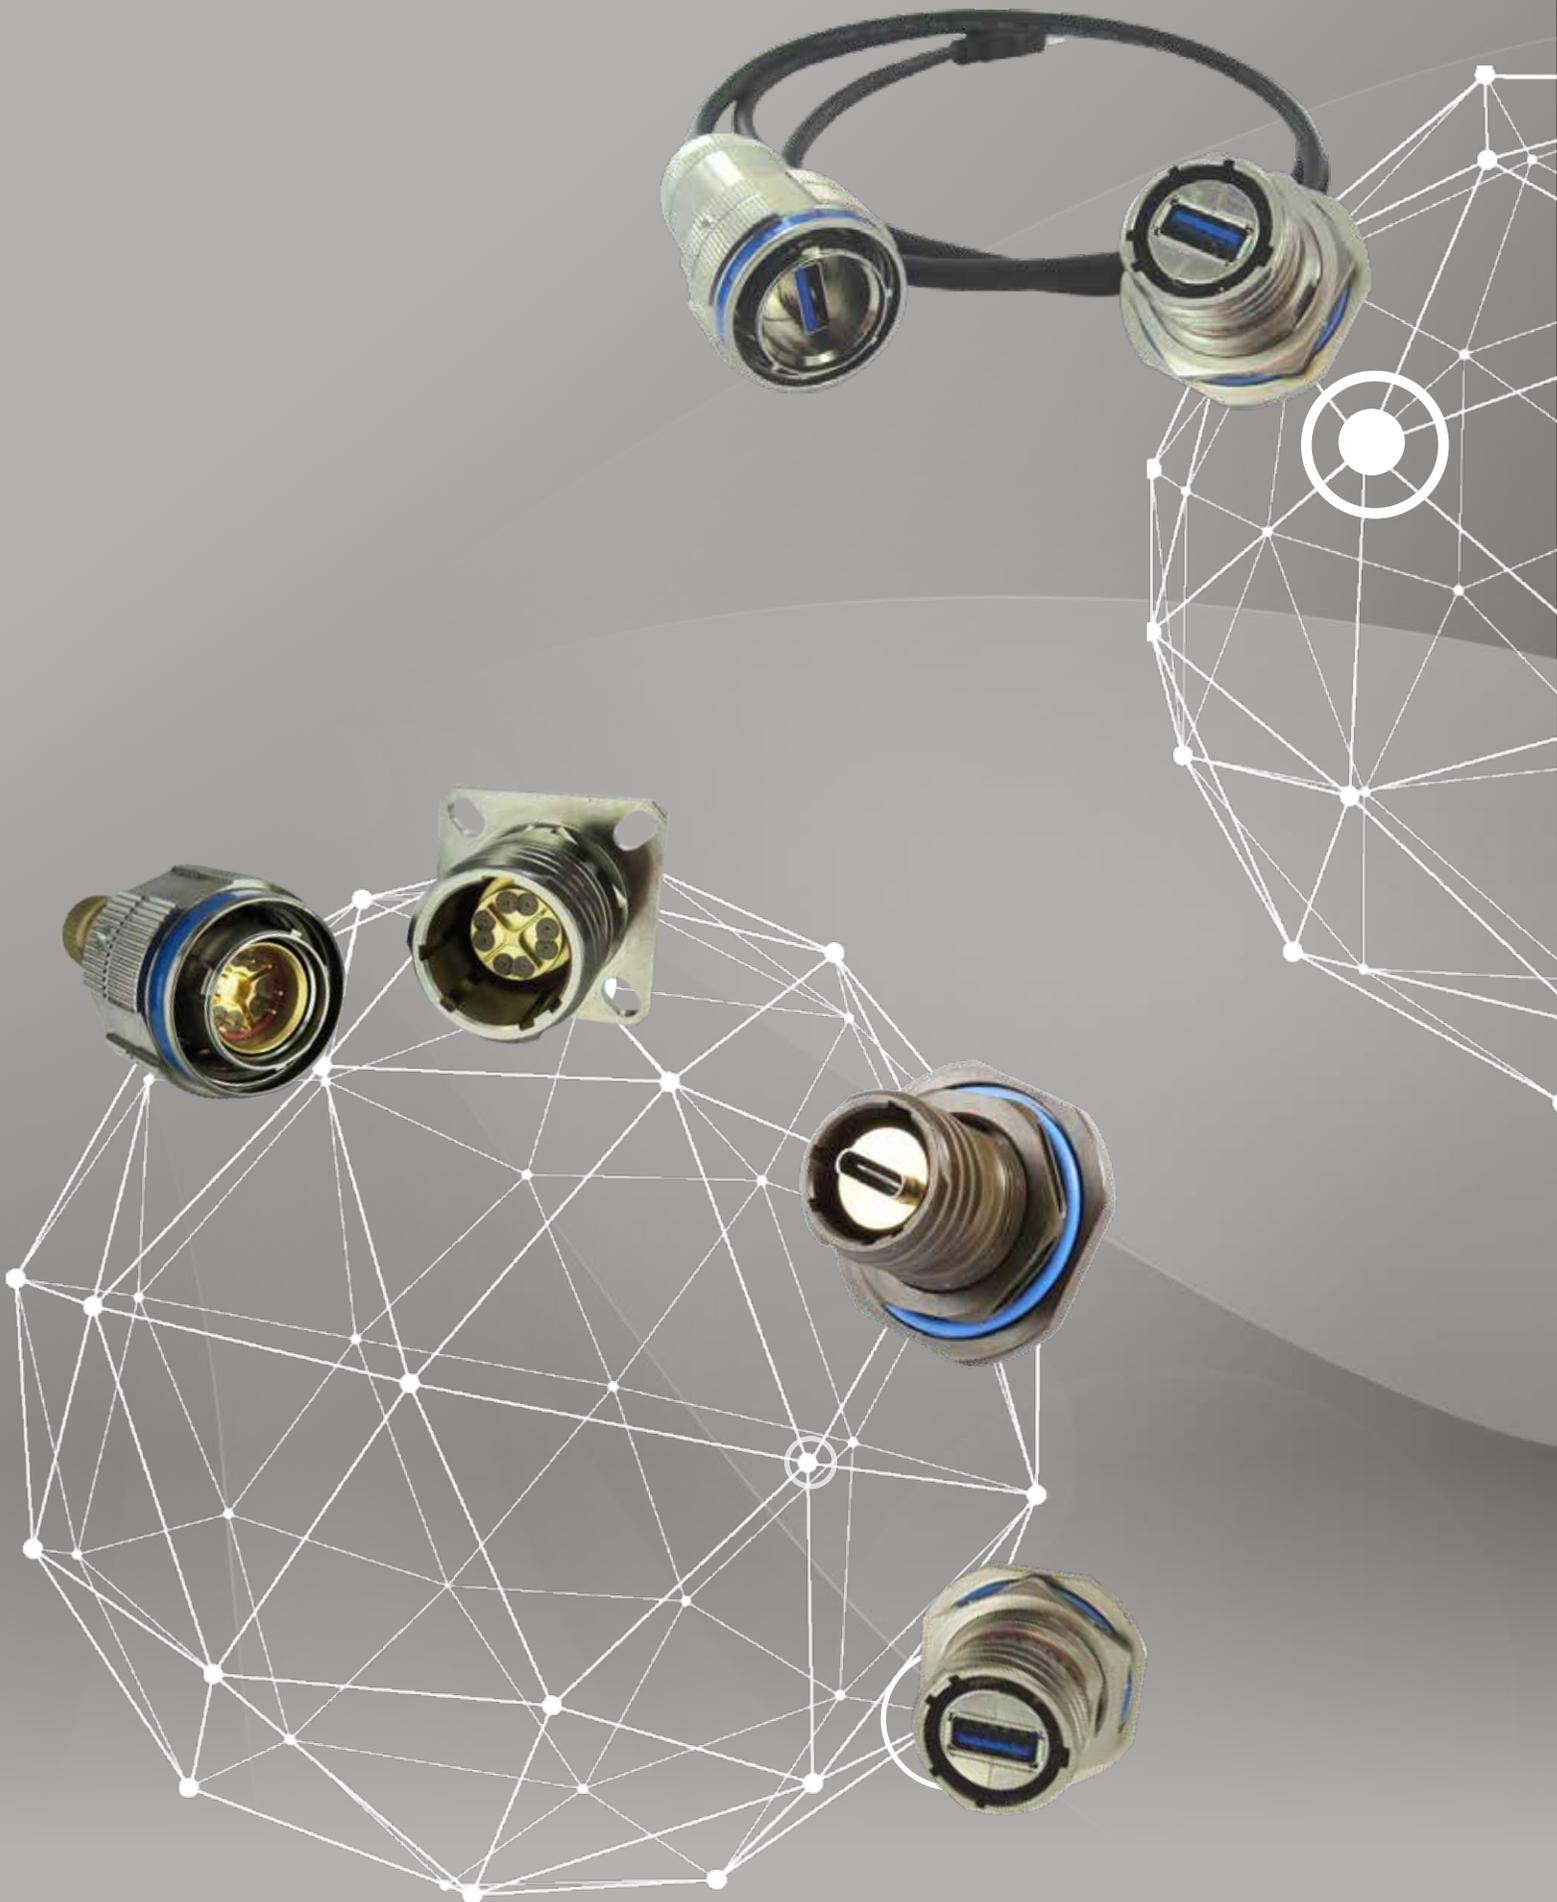

## USB3.2



## Table of contents

<b>USB3.2</b>	<b>13</b>
USB3CFTV™	14
USB3FTV™	20
USB3FTV™ - Transversally sealed and hermetic receptacle	24
USB3FTV™ - Stand-off receptacle	27
USB3FTV™ - Reduced flange receptacle	29
USB3FTV™ - VG96949	31
USB3 Type A - Type C - Adapter	32
μCom-USB3.2 & TVμCom-USB3.2	37
μCom-USB3.2	38
TVμCom-USB3.2	40

USB3.2

USB2.0

Cables and  
cordsetsAdapters and  
access pointsRugged  
electronics

Accessories

Assembly  
instructions

How to order

# USB3CFTV



## Description

USB3CFTV is a ruggedized solution for USB Type-C standard connectors.

Based on MIL-DTL-38999 series III type, plugs, and receptacles are mated thanks to a Tri-Start thread coupling mechanism. This solution strengthens and protects your devices against fluids, dust, shocks, and disconnection due to vibrations.

The assembly of your standard USB type-C cordset into our ruggedized plugs does not require any tool and can be easily performed on the field. In addition, reversibility for data and power transmission is achieved for both plug and receptacles.

Benefit from USB type-C flexibility to design many different data, power delivery, and video configurations with all the advantages of Amphenol Socapex know-how in ruggedized connector solutions.

## Main features

### Main characteristics:

- Thread coupling, MIL-DTL-38999 series III type
- Shell size 11
- Shock, vibration, and traction resistance
- No tools are required for cabling adaptation
- EMI protection: Shielding continuity
- Mating plug/receptacle cycles: 500 at least

### Data transmission and Power:

- Compatible with USB3.2 Gen 1
- Fully reversible for both plug and receptacle
- Intensity: 5A max
- Voltage: 20V max
- Dielectric: Withstanding voltage: 100 VAC
- Maximum length transmission: Up to 1 m (only for cordset versions). Amplifiers to come, please consult us.

### Environmental protection:

- Sealing: IP68 unmated and mated (with sealed USB3 Type-C cordset)
- Material and platings:
  - 48 h - Aluminum shell with Nickel plating ✓
  - 500 h - Aluminum shell with Black zinc nickel plating ✓
  - 500 h - Aluminum shell with Olive drab cadmium plating
  - 500 h - Aluminum shell with Tin-zinc plating ✓ **NEW**
  - 500 h - Marine bronze shell ✓
  - 500 h - Stainless steel passivated ✓
- Shock resistance: IK06 onto mated pair
- Operating temperature: -40°C to +85°C (-40°F to 185°F)




✓ : RoHS compliant

## Back terminations

Cordset with USB Type-C male plug

USB3C male termination

USB Type-C with PCB: PC tails contacts

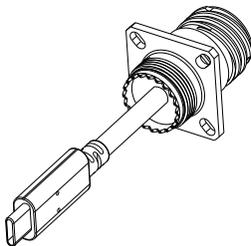

**How to order :** Please refer to page 115





# USB3CFTV

## Overall dimension

**Receptacle - Stand-off Jam nut receptacle – Hexagonal nut mounting - Shell type 7 with double flange for PCB mounting**



Part number type: **USB3CFTV 7 X F459**

**X:** see the How to order to complete your part number

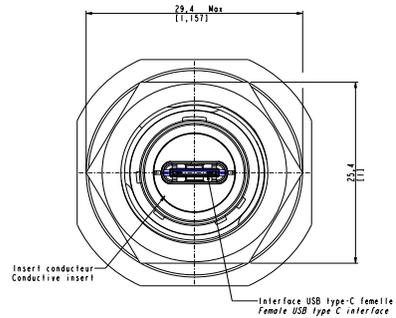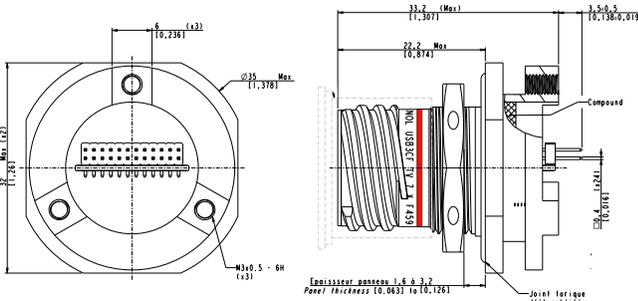

PCB layout



Panel Drilling

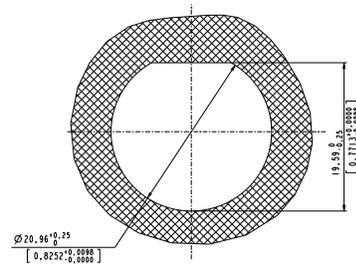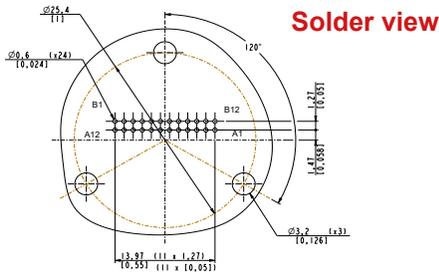

**Receptacle - Stand-off Reduced flange receptacle F059 – Jam nut Shell type 7 - Castle nut mounting for PCB mounting**

Part number type: **USB3CFTV 7 X F059**



**X:** see the How to order to complete your part number

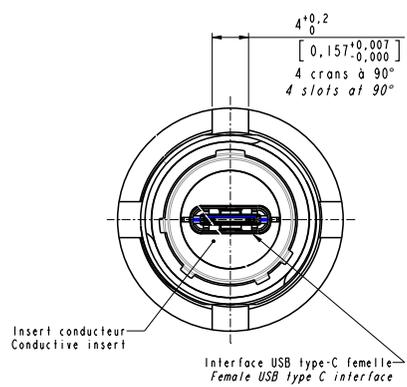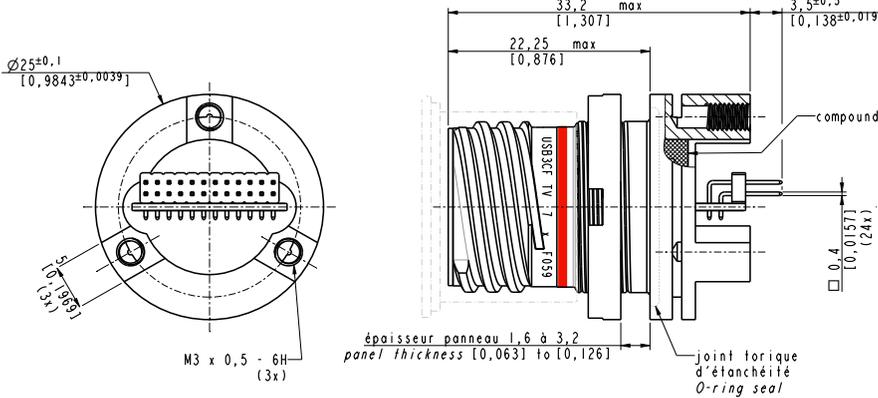

Panel rilling

PCB layout

Solder view

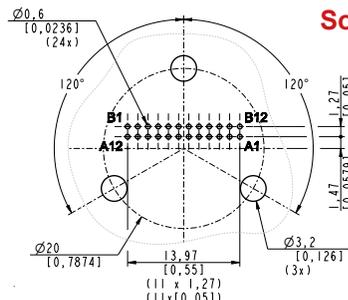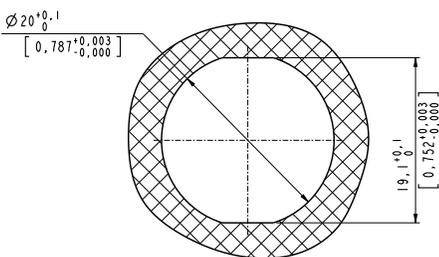

# USB3CFTV






## Overall dimension


Plug - Plug without cordset – Shell type 6

Part number type: **USB3CFTV 6 X**

**X**: see the How to order to complete your part number

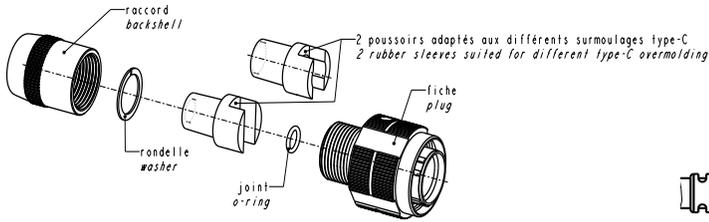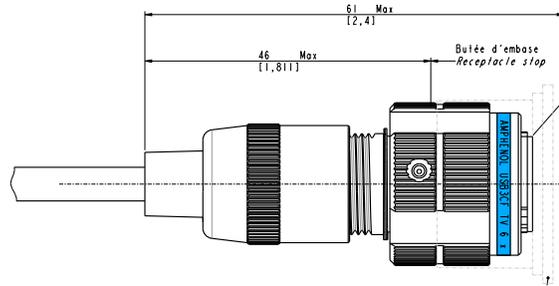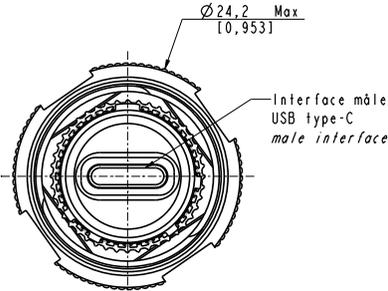

USB3 type-C plug recommended dimensions (plug not included)



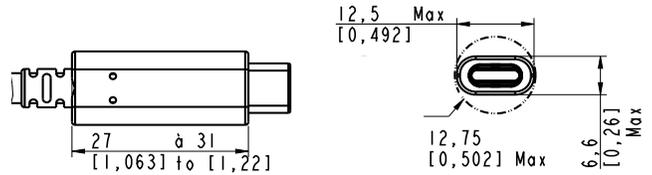


Note: USB3 Type-C cordset can be inserted in any direction. Reversibility is managed on Receptacle side also.


Receptacle - Square flange receptacle – Shell type 2 - 4 mounting holes - Male USB termination

Part number type: **USB3CFTV 2 2 X**

**X**: see the How to order to complete your part number

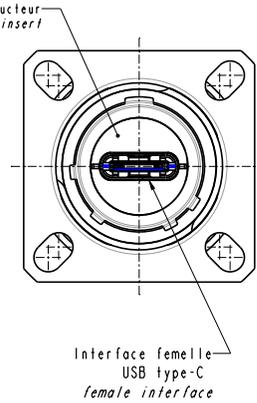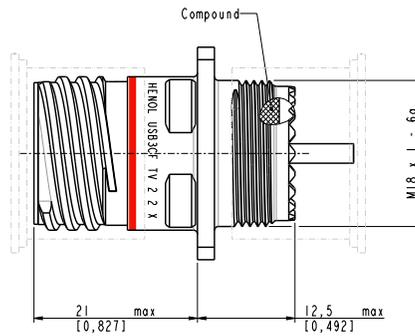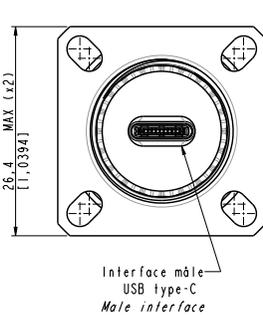

### Panel Drilling

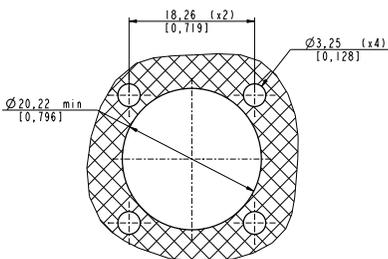

# USB3CFTV




## Overall dimension

**Receptacle** - Jam nut receptacle – Shell type 7 - Male USB termination - Hexagonal nut mounting

Part number type: **USBC3F TV 7 2 X**


**X:** see the How to order to complete your part number

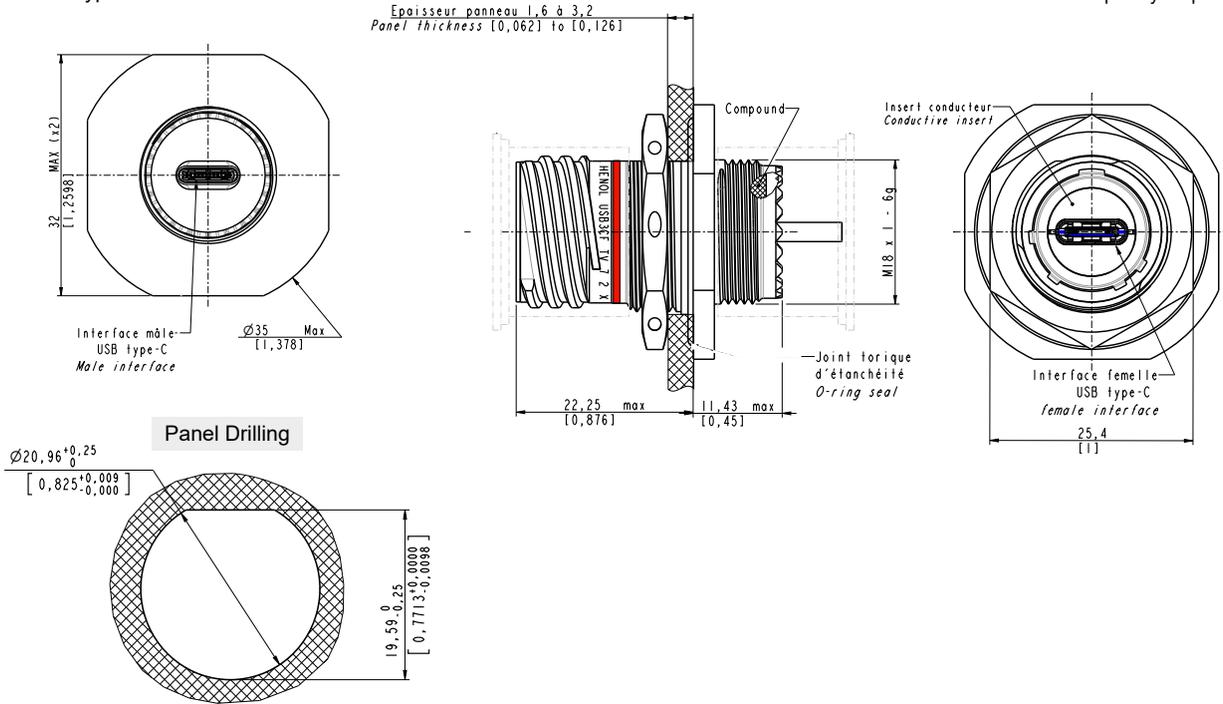

**Receptacle** - Reduced flange receptacle F312 – Jam nut shell type 7 - USB male termination - Castle nut mounting

Part number type: **USB3CFTV 7 2 X F312**

**X:** see the How to order to complete your part number

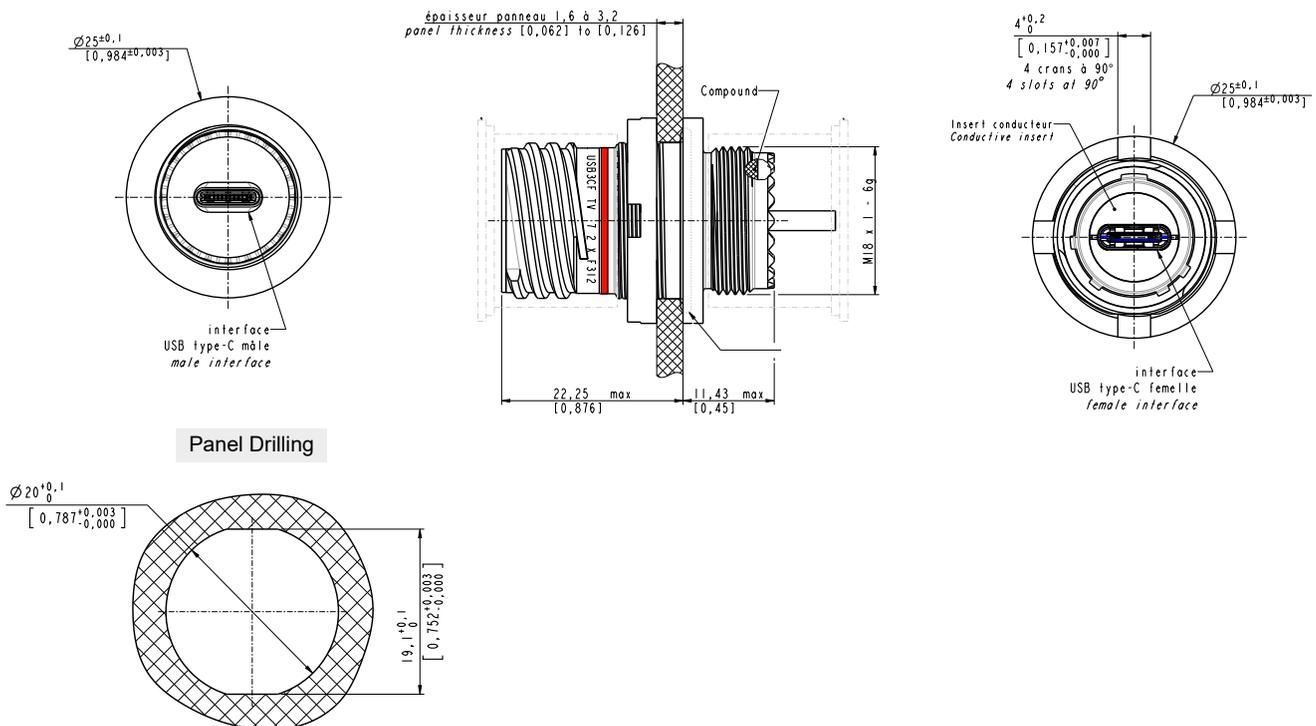





# USB3CFTV

## Overall dimension


Receptacle - Square flange receptacle – Shell type 2 - 4 mounting holes - Cordset with USB male plug

Part number type: **USB3CFTV 2 X XXX**

**X:** see the How to order to complete your part number

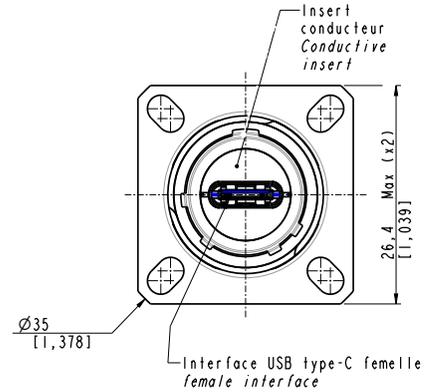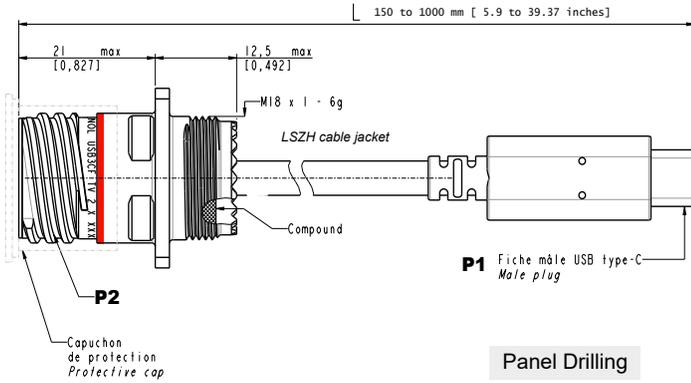



### Panel Drilling

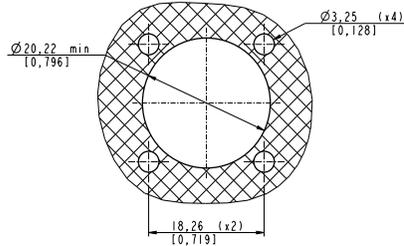


Jam nut receptacle – Shell type 7 - Cordset with USBC male plug - Hexagonal nut mounting

Part number type: **USB3CFTV 7 X XXX**

**X:** see the How to order to complete your part number

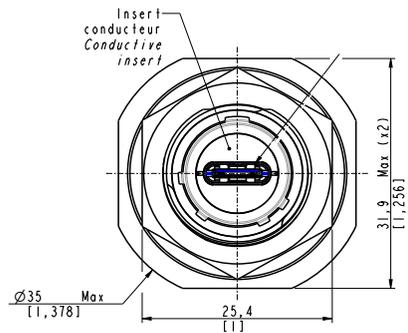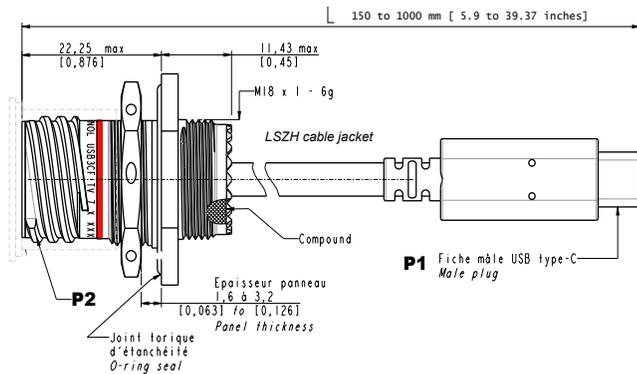

### Panel Drilling

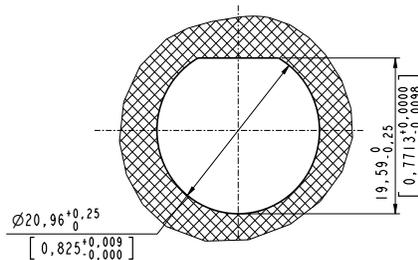

# USB3CFTV




## Overall dimension

Receptacle - Reduced flange receptacle F312 – Jam nut shell type 7 - Cordset with USB male plug - Hexagonal nut mounting

Part number type: **USB3CFTV 7 X XXX F312**


X: see the How to order to complete your part number

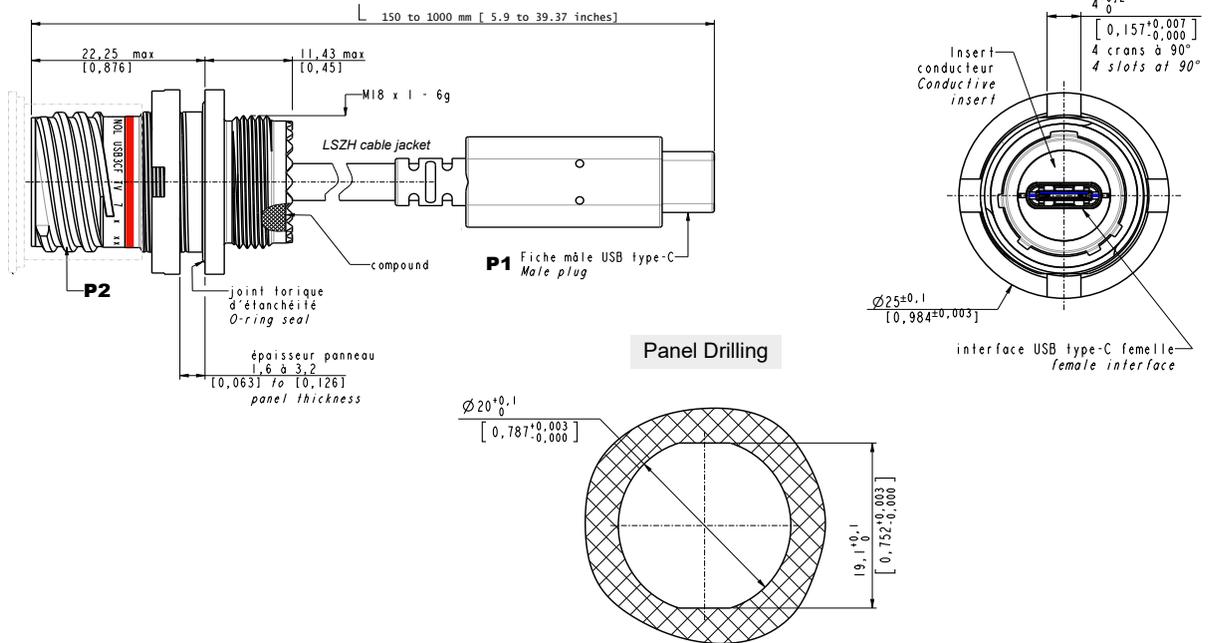

Stand-off Square flange receptacle F459 – 4 mounting holes - Shell type 2 with double flange for PCB mounting

Part number type: **USB3CFTV 2 X F459**

X: see the How to order to complete your part number

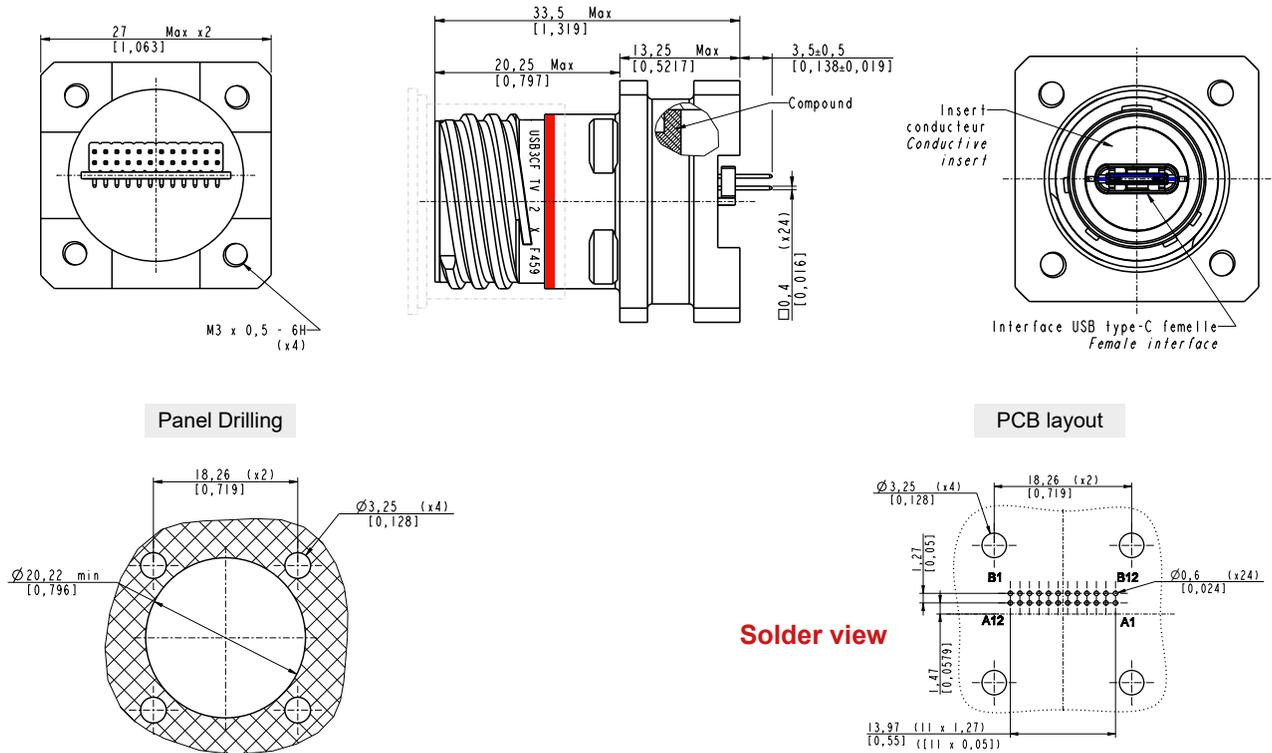

Solder view

# USB3FTV™



## Description

USB3FTV™ is a complete ruggedized solution around USB3.2 Gen1 Type-A standard using a Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) to connect the plug and receptacle.

This solution allows you to insert a standard USB3.2 Gen1 cordset into a metallic plug which will protect it from shocks, dust and fluids. The assembly of this ruggedized plug doesn't require any tools and can be assembled easily in the field. Perfectly adapted to the USB3.2 Gen1 standard, you have two coding possibilities to facilitate coupling when you have several receptacles on a panel.

The corresponding USB3FTV™ receptacle dedicated to be mounted on your panel enables you to reinforce and protect your system against leakage, shocks, vibrations and much more. This receptacle part is delivered with a defined coding when ordered but can be conveniently changed with our dedicated USBF ODE tool.

You have also the possibility to order a complete solution with the included USB3.2 Gen1 cable, on the plug or the receptacle side.

## Main features

### MAIN CHARACTERISTICS

- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15
- 2 mechanical coding / polarization possibilities (receptacle insert rotation)
- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection
- USB3FTV plug retention in the receptacle: 100 N in the axis
- Mating cycles: 500 minimum

### DATA TRANSMISSION

- USB-A
- USB specification 3.2 Gen1
- Data rate: up to 5Gb/s for high speed USB

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray: - 48 h with nickel plating ✓
- 500 h with Black zinc nickel ✓
- 500 h with Olive drab cadmium
- 500 h with Tin-zinc plating ✓ NEW
- 1000 h with Marine bronze shell ✓
- Fire retardant / low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06: weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Humidity: 21 days, 43°C, 98% humidity
- Temperature range: - 40°C / +85°C

### APPLICATIONS

- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas

✓ : RoHS compliant

**How to order :** Please refer to page 116

## Back terminations

Type 1:  
female USB-A




# USB3FTV™



## Overall dimension



### Plug - Shell type 6

Part number type: **USB3FTV 6 X**

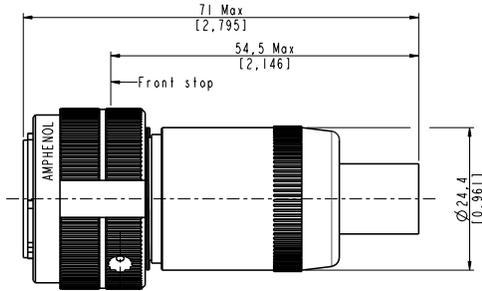

Coding A


Coding B

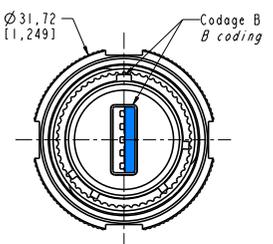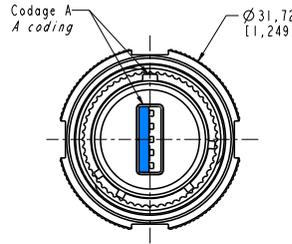

### Plug - Shell type 6 - USB-A cordset



Part number type: **USB3FTV 6 X XX X CROS**

**USB3FTV 6 X XX X STR**

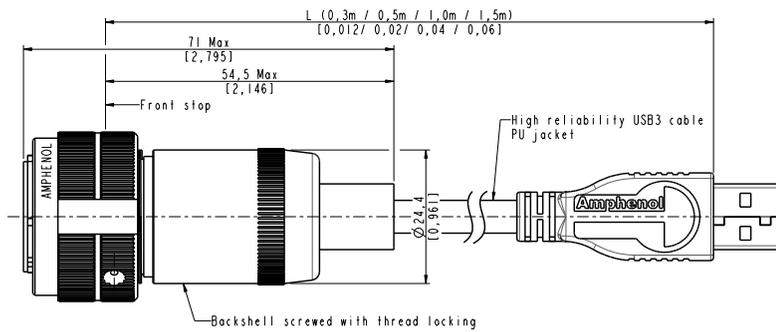

Coding A

Coding B

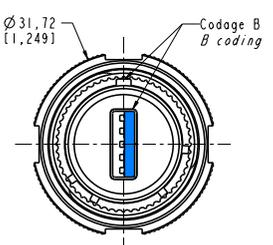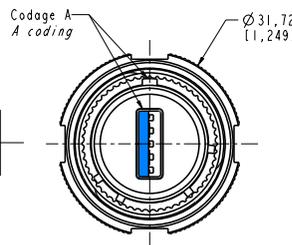


**Important note:**

- To define a straight or crossed USB3.2 Gen1 cordset, please refer to "Assembly instructions" page 80



### Plug - Shell type 6 - Open USB cordset

Part number type: **USB3FTV 6 X XX X OPEN**

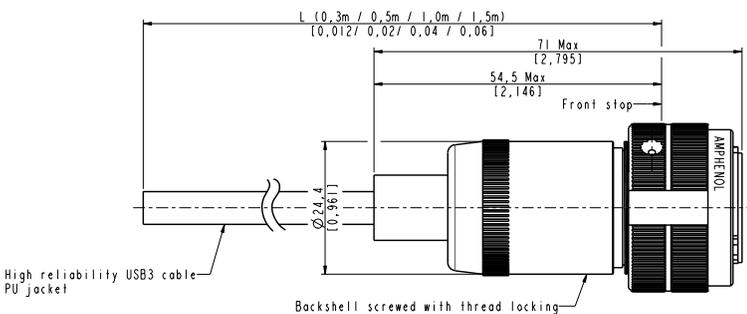

Coding A

Coding B

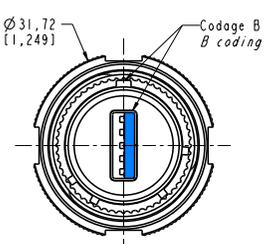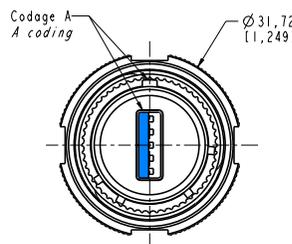





# USB3FTV™



## Overall dimension






**Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination female**

Part number type: **USB3FTV 2 X X**

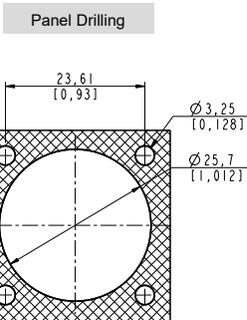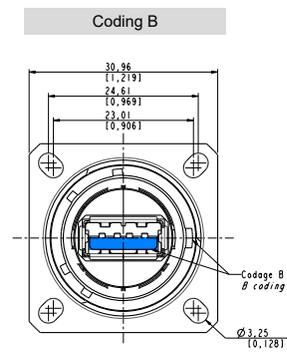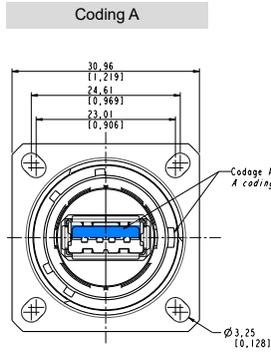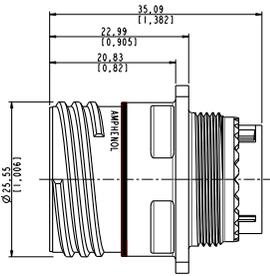

**Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination female - Metal backshell**

Part number type: **USB3FTV 2 X PE X**

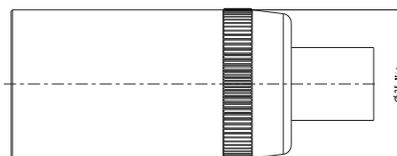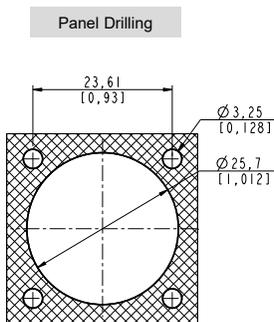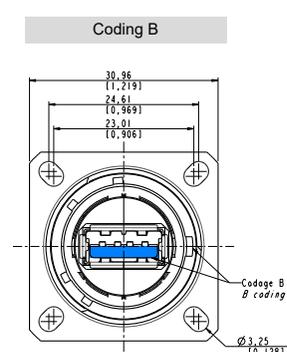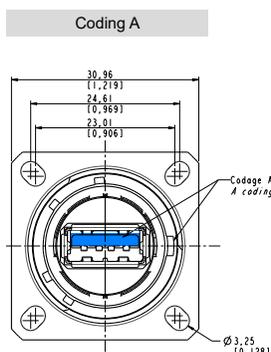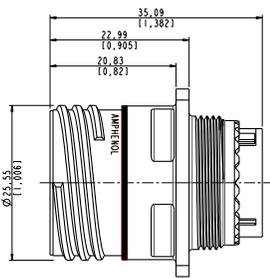





# USB3FTV™



## Overall dimension







Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination female

Part number type: **USB3FTV 7 X X**

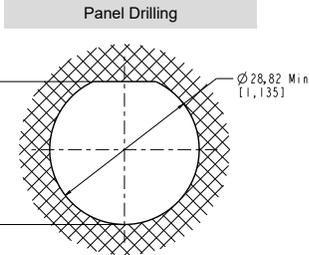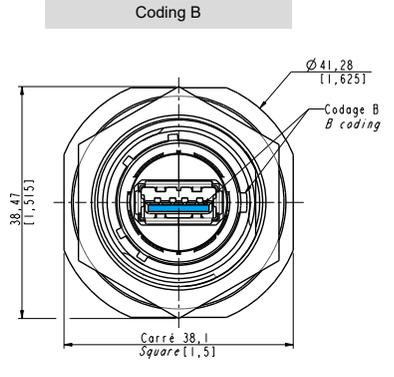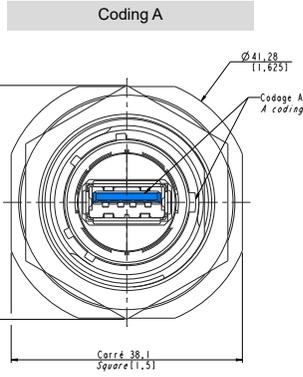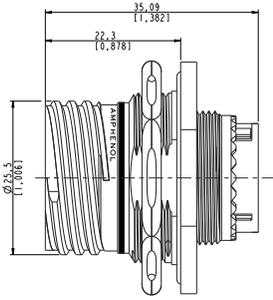

Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination female - Metal backshell

Part number type: **USB3FTV 7 X PE X**

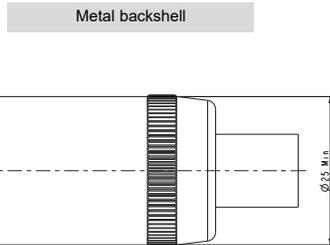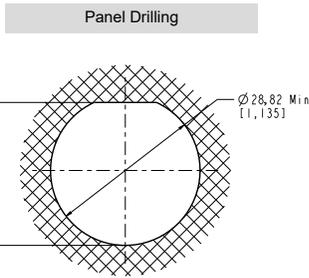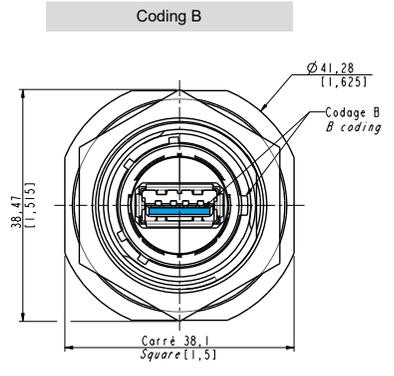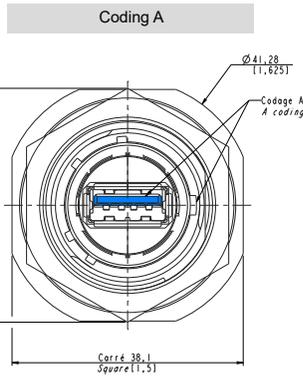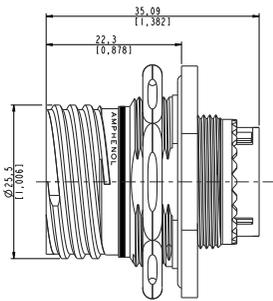

USB3.2  
USB2.0  
Cables and cordsets  
Adapters and access points  
Rugged electronics  
Accessories  
Assembly instructions  
How to order

# USB3FTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

## Description



The transversally sealed receptacle is in all aspects equivalent to the standard and in addition, is improved with compound at the rear of the receptacle. This will prevent the sealing of the receptacle when unmated with his plug or protective cap.

The hermetic solution, as the transversally sealed one is compounded at the rear of the receptacle. Helium leakage is less than  $1.10 \cdot 10^{-6} \text{ cm}^3$  per second [0.1 micron cubit ft per hour] at one bar [15 psi] pressure differential. The test is performed on all of the hermetic receptacles.

## Main features

### MAIN CHARACTERISTICS

- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15
- 2 mechanical coding/polarization possibilities by the user (receptacle insert rotation)
- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection
- USB3FTV plug retention in the receptacle: 100 N in the axis
- Mating cycles: 500 minimum

### DATA TRANSMISSION

- USB-A
- USB specification 3.2 Gen1
- Data rate: up to 5Gb/s for high speed USB

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 500 h with Tin-zinc plating ✓ NEW
  - 1000 h with marine bronze shell ✓
  - 500 h with black zinc nickel ✓
- Fire retardant / Low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06 > weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Humidity: 21 days, 43°C, 98% humidity
- Temperature range: - 40°C / +85°C

### APPLICATIONS


- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas

✓ : RoHS compliant


**How to order :** Please refer to page 117

## Back terminations


USB cable end type A

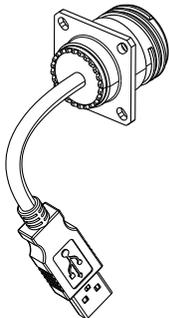

USB cable type «OPEN»



VG96949 Female USB-A



# USB3FTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

## Overall dimension





**Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - USB-A or Open cordset**


Part number type: **USB3FTV 2 S X XX X ACROS**

**USB3FTV 2 S X XX X ASTR**


Part number type: **USB3FTV 2 S X XX X OPEN**

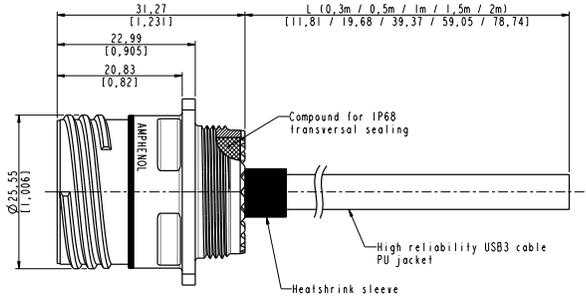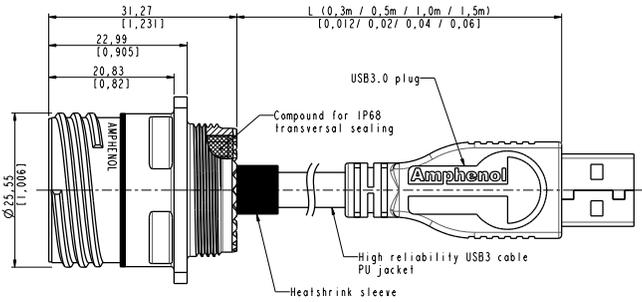


Panel drilling

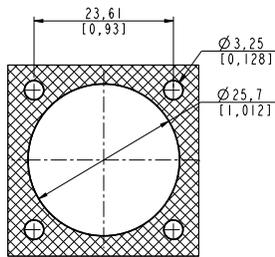

Coding A

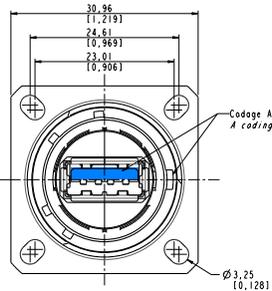

Coding B


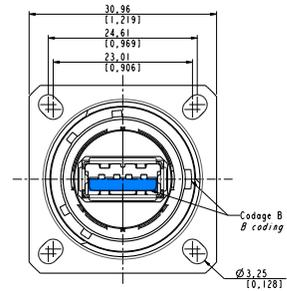


**Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - USB-A or Open cordset**


Part number type: **USB3FTV 7 S X XX X ACROS**

**USB3FTV 7 S X XX X ASTR**


Part number type: **USB3FTV 7 S X XX X OPEN**

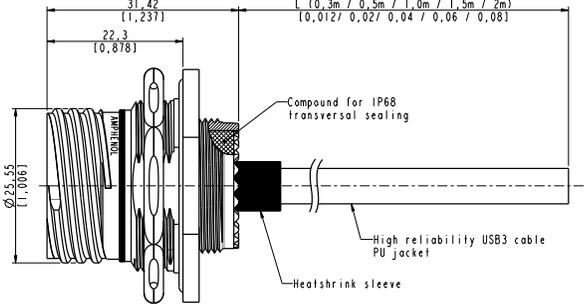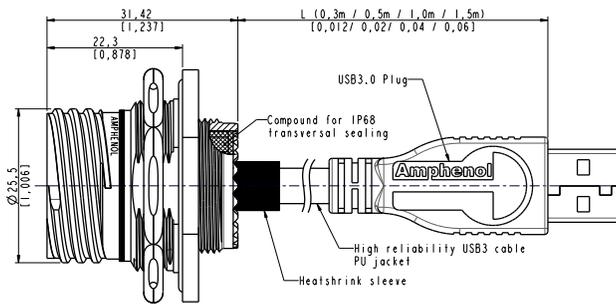


Panel drilling

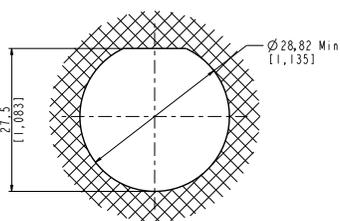

Coding A

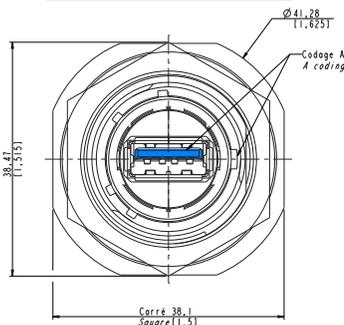

Coding B

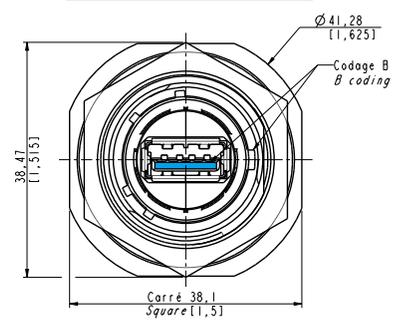

**Important note:**

- To define a straight or crossed USB3.0 cordset, please refer to "Assembly instructions" page 80

# USB3FTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE



## Overall dimension




**Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - USB-A or Open cordset**

Part number type: **USB3FTV 2 H X XX X ACROS**  
**USB3FTV 2 H X XX X ASTR**


Part number type: **USB3FTV 2 H X XX X OPEN**

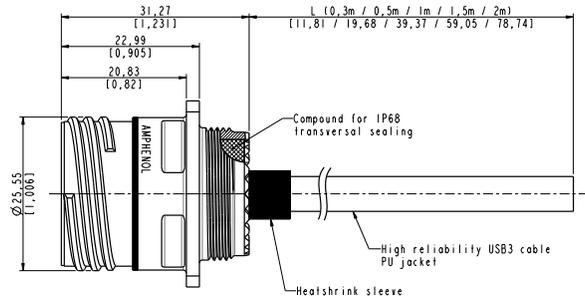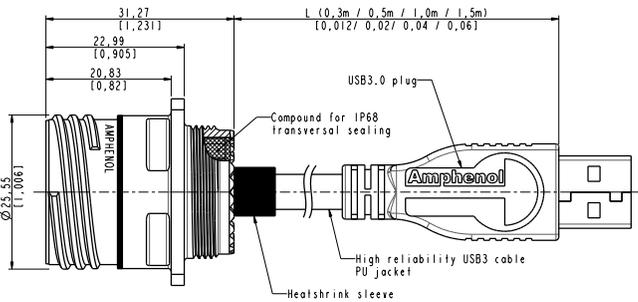


Panel drilling

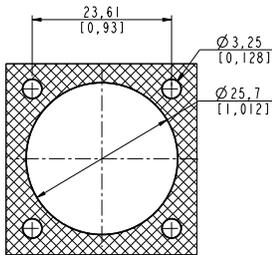

Coding A

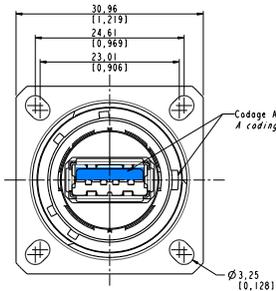



Coding B

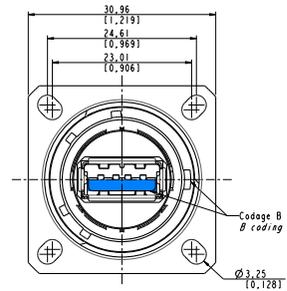


**Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - USB-A or Open cordset**

Part number type: **USB3FTV 7 H X XX X ACROS**  
**USB3FTV 7 H X XX X ASTR**


Part number type: **USB3FTV 7 H X XX X OPEN**

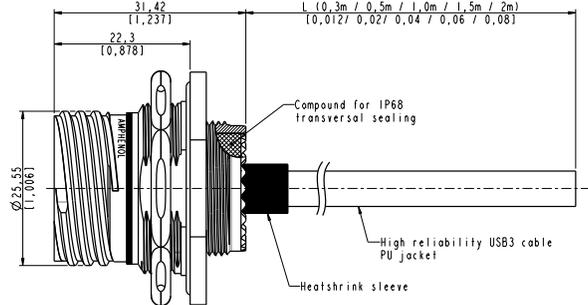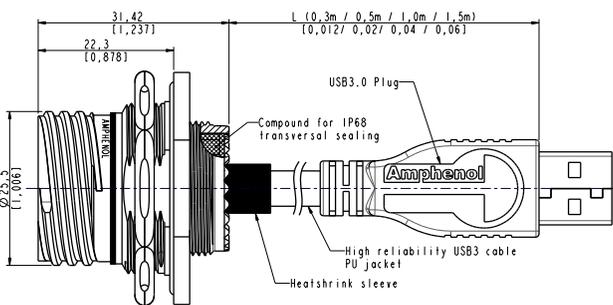


Panel drilling

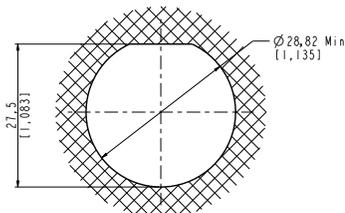

Coding A

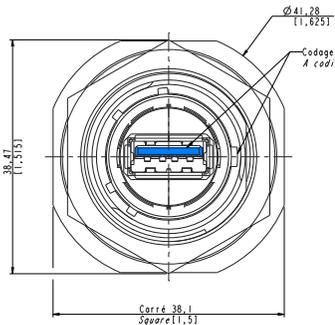

Coding B

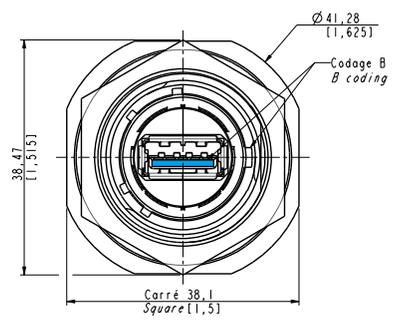

**Important note:**

- To define a straight or crossed USB3.0 cordset, please refer to "Assembly instructions" page 80





# USB3FTV™ - REDUCED FLANGE RECEPTACLE




## Description

This Reduced Flange USB3FTV™ is ideal for applications where small dimensions and lower weight are critical. The flange of this receptacle is reduced in order to gain more space on the panel enabling you to mount more receptacles in the same amount of space. Internal dimensions are also modified to save some space internally, giving you more space. The reduced flange deviation saves 41% footprint surface reduction and is 15% lighter than standard USB3FTV™ receptacle. Finally, you have two castle nut options, standard castle nut and safety castle nut that enable you to add a lock wire for anti-rotation of the nut.

## Overall dimension

Receptacle - Reduced flange receptacle - Castle nut mounting - Shell type 7 - F312 or F311

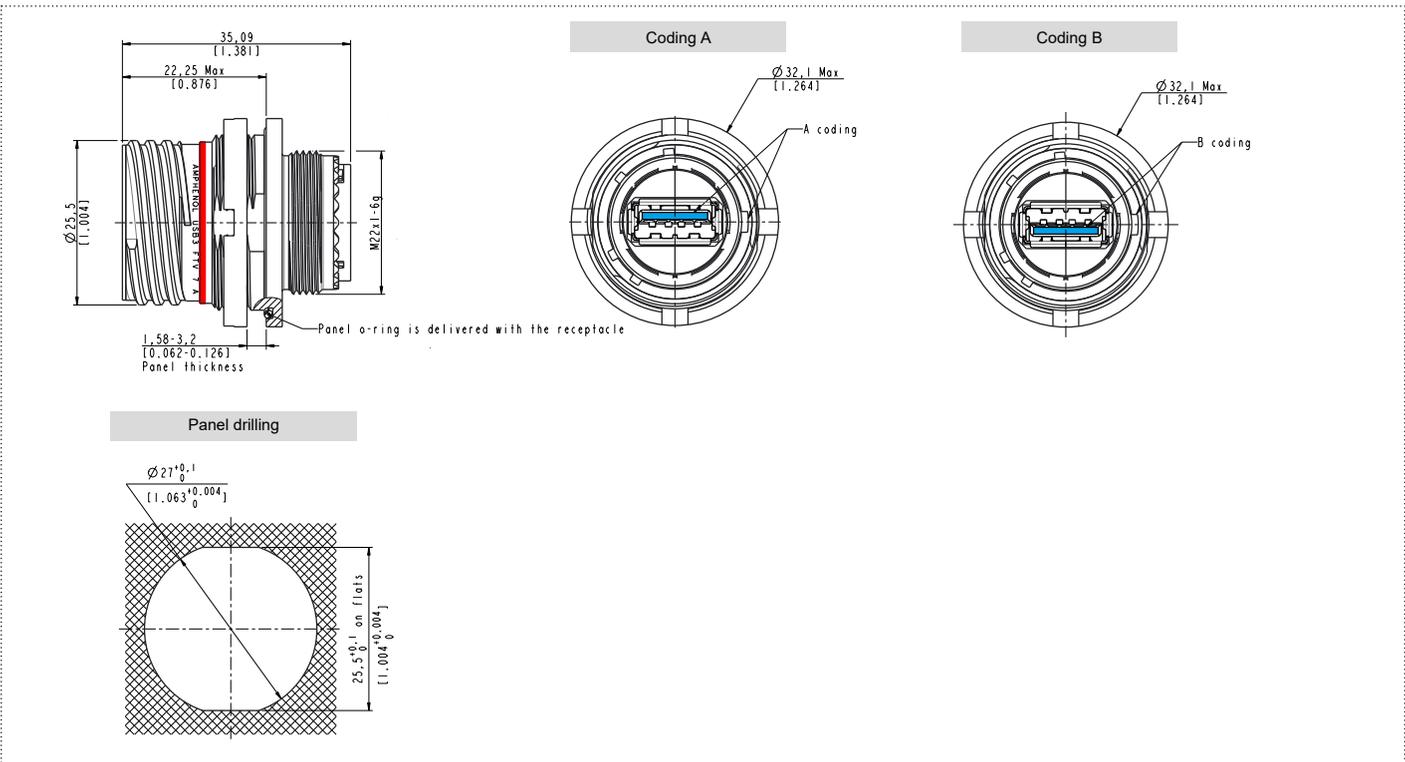

Part number for coding A	Part number for coding B	Mounting nut option	Plating
<a href="#">USB3FTV 7 A N F312</a>	<a href="#">USB3FTV 7 B N F312</a>	Standard caste nut	Nickel ✓
<a href="#">USB3FTV 7 A G F312</a>	<a href="#">USB3FTV 7 B G F312</a>		Olive drab cadmium
<a href="#">USB3FTV 7 A ZN F312</a>	<a href="#">USB3FTV 7 B ZN F312</a>		Black zinc nickel ✓
<a href="#">USB3FTV 7 A N F311</a>	<a href="#">USB3FTV 7 B N F311</a>	Safety caste nut	Nickel ✓
<a href="#">USB3FTV 7 A G F311</a>	<a href="#">USB3FTV 7 B G F311</a>		Olive drab cadmium
<a href="#">USB3FTV 7 A ZN F311</a>	<a href="#">USB3FTV 7 B ZN F311</a>		Black zinc nickel ✓

✓: RoHS compliant


USB3.2  
USB2.0  
Cables and cordsets  
Adapters and access points  
Rugged electronics  
Accessories  
Assembly instructions  
How to order

# USB3FTV™ - REDUCED FLANGE RECEPTACLE



## Overall dimension




Receptacle - Reduced flange receptacle - Castle nut mounting - Shell type 7 - F059 or F058

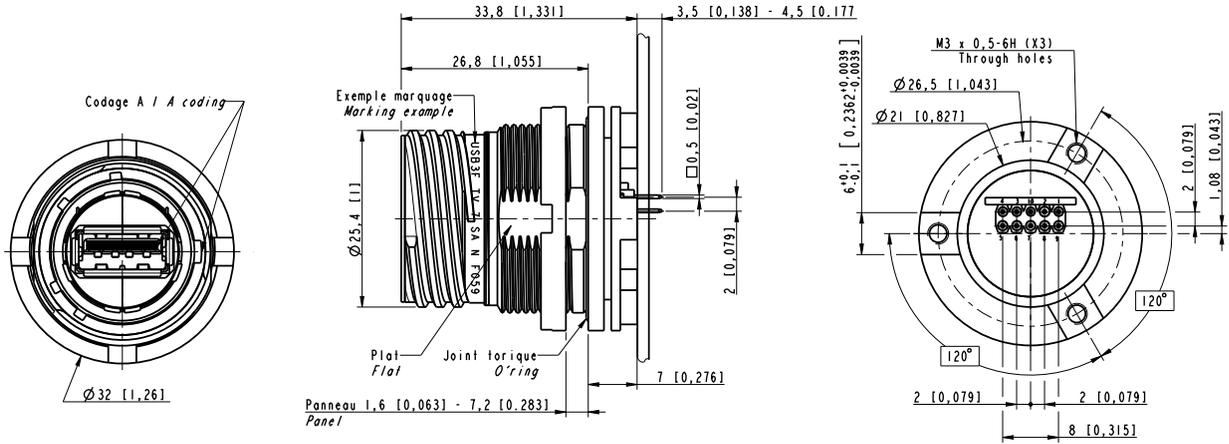

Panel drilling

PCB Layout - Coding A

PCB Layout - Coding B

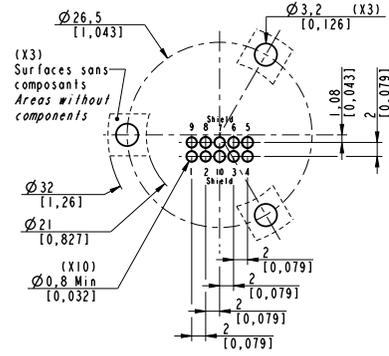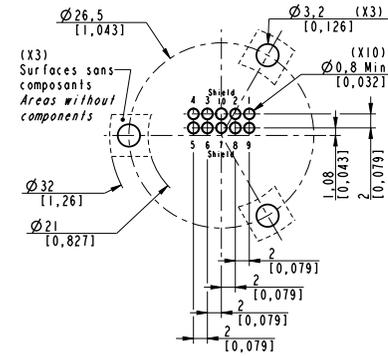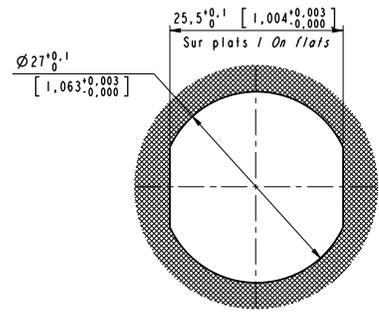

Part number for coding A	Part number for coding B	Mounting nut option	Plating
<a href="#">USB3FTV 7 SA N F059</a>	<a href="#">USB3FTV 7 SB N F059</a>	Standard caste nut	Nickel ✓
<a href="#">USB3FTV 7 SA G F059</a>	<a href="#">USB3FTV 7 SB G F059</a>		Olive drab cadmium
<a href="#">USB3FTV 7 SA ZN F059</a>	<a href="#">USB3FTV 7 SB ZN F059</a>		Black zinc nickel ✓
<a href="#">USB3FTV 7 SA N F058</a>	<a href="#">USB3FTV 7 SB N F058</a>	Safety caste nut	Nickel ✓
<a href="#">USB3FTV 7 SA G F058</a>	<a href="#">USB3FTV 7 SB G F058</a>		Olive drab cadmium
<a href="#">USB3FTV 7 SA ZN F058</a>	<a href="#">USB3FTV 7 SB ZN F058</a>		Black zinc nickel ✓

✓: RoHS compliant

USB3.2  
USB2.0  
Cables and cordsets  
Adapters and access points  
Rugged electronics  
Accessories  
Assembly instructions  
How to order

# USB3FTV™ - VG96949



## Description


This version of our USB3FTV™ is qualified VG96949. According to this standard, receptacles are compounded, the panel nut of the jamnut receptacle version is according to VG95319 and the treatment is Tin Zinc RoHS.

**How to order :** Please refer to page 118

## Overall dimension


Plug - Shell type 6

Part number type: **VG96949 C 15 X X**

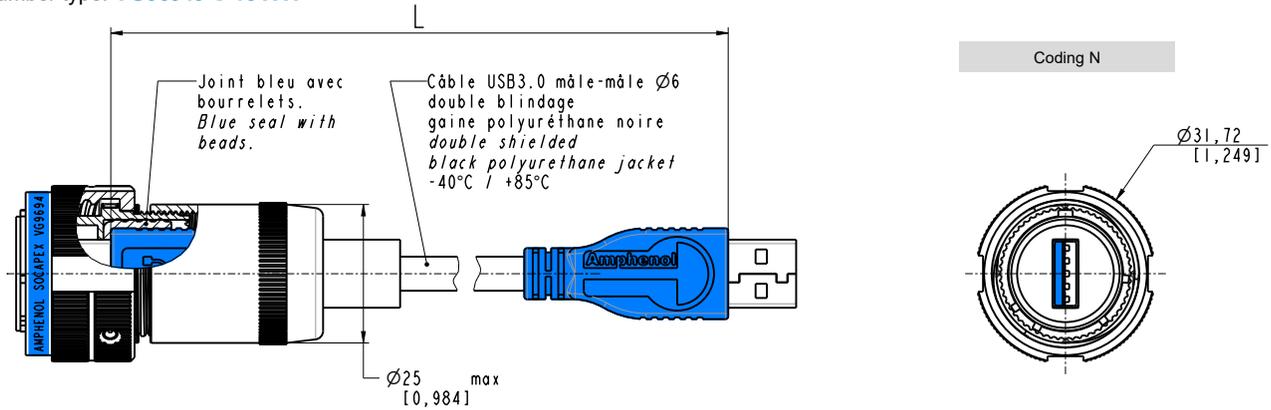


**Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Compounded**

Part number type: **VG96949 A 15 X X**

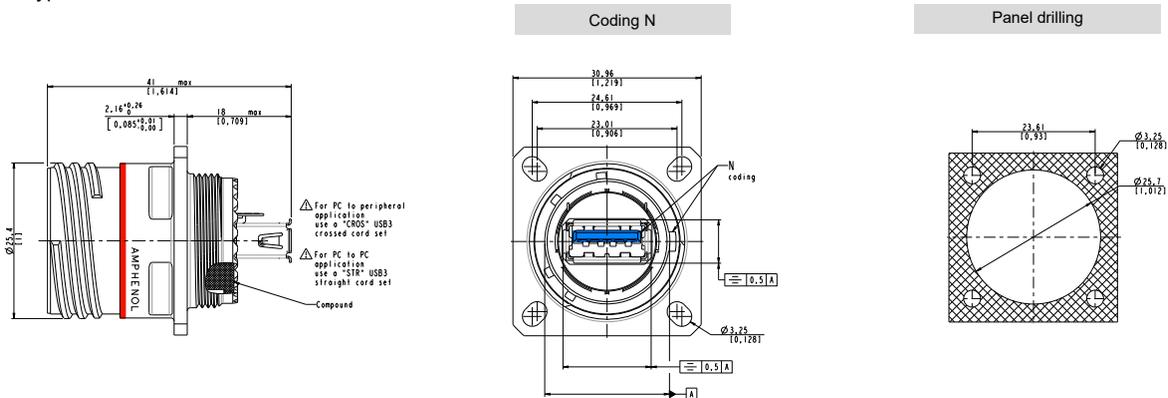

**Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Compounded**

Part number type: **VG96949 B 15 X X**

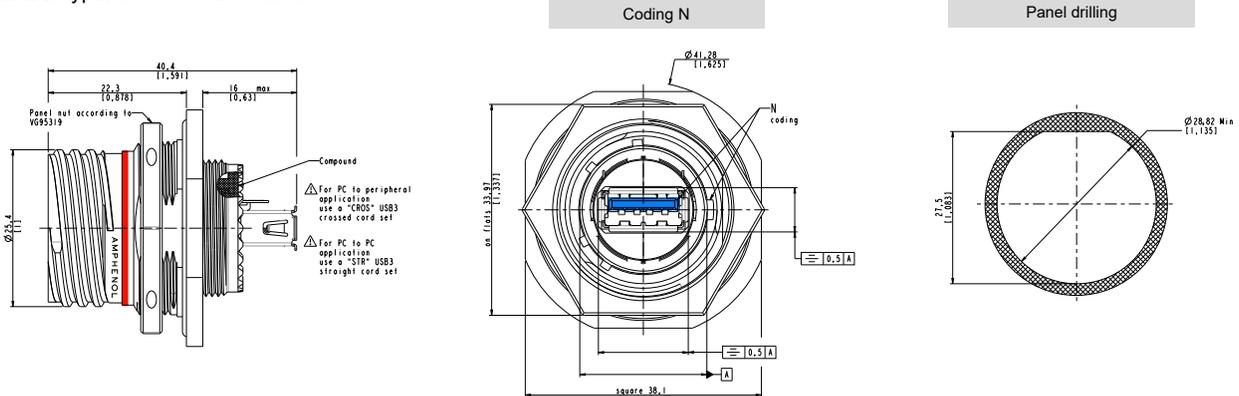



## USB3 TYPE A - TYPE C - ADAPTER

### Description

The USB3 Type A - Type C™ adapter is a complete ruggedized solution around USB3.2 Gen1 Type A and USB Type C. This solution allows you to integrate new equipment featuring a USB Type C port without disassembling an existing USB2 or USB3 Type A link. Two adaptation options are available to facilitate integration into your system: Type C host or Type C device (see description table). The USB3FTV™ receptacle dedicated to be mounted on your panel allows you to reinforce and protect your system against leakage, shock, vibration and much more. There are 2 mechanical coding possibilities (receptacle insert rotation) on the USB-A side and a fully reversible USB-C port on other side that can be integrated with our USB3CFTV™ plug.

### Main features

#### MAIN CHARACTERISTICS

- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) - Shell size 15
- 2 mechanical coding/polarization possibilities by the user (receptacle insert rotation)
- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection

#### DATA TRANSMISSION

- USB specification 3.2 Gen1
- Data rate: up to 5Gb/s for high speed USB

#### ENVIRONMENTAL PROTECTION

- Sealing (when mated and unmated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 1000 h with marine bronze shell ✓
  - 500 h with black zinc nickel ✓
- Fire retardant / Low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06 > weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Humidity: 21 days, 43°C, 98% humidity
- Temperature range: - 40°C / +85°C

#### APPLICATIONS

- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas

✓ : RoHS compliant

Square flange



Jam nut



Reduced flange




# USB3 TYPE A - TYPE C - ADAPTER



## Overall dimension

Square flange receptacle - Shell type 2 - 4 mounting holes

Part number type: **31930X-XXX**  
**32242X-XXX**

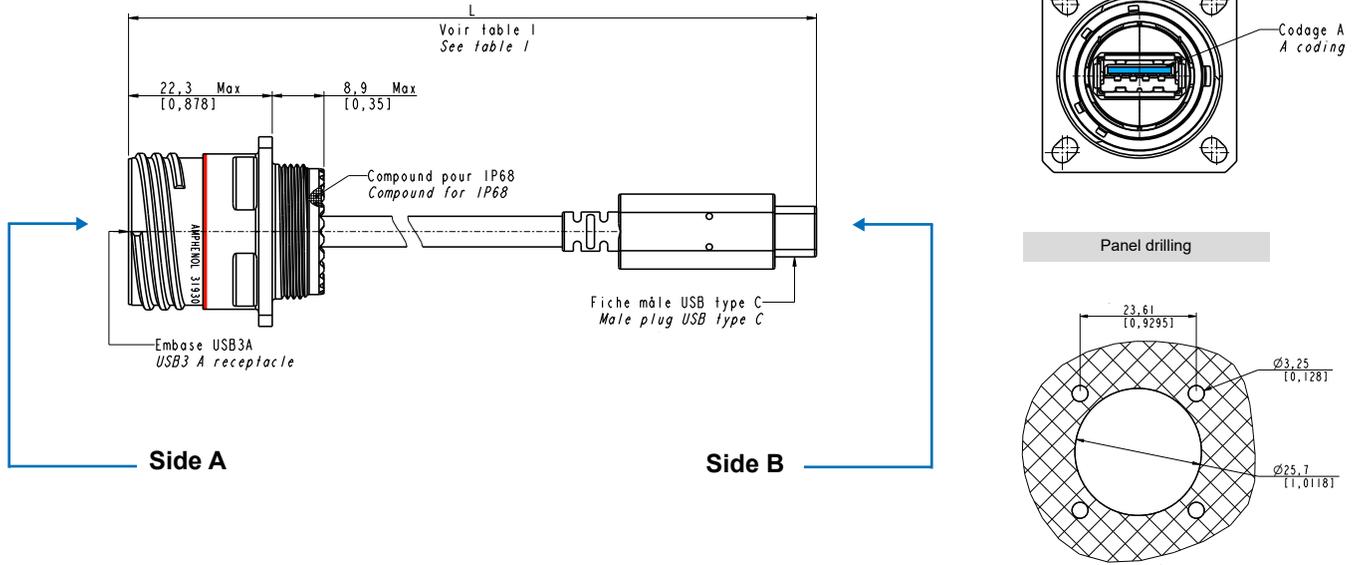

### SIDE A - HOST → SIDE B DEVICE IN SQUARE FLANGE RECEPTACLE

#### Designation

31930	Plating		-	Lenght	
	<b>G</b>	Olive drab cadmium		<b>015</b>	15 cm (5.91 inch)
<b>N</b>	Nickel	<b>030</b>	30 cm (11.81 inch)		
<b>ZN</b>	Black zinc nickel	<b>050</b>	50 cm (19.68 inch)		
<b>BZ</b>	Marine bronze	<b>100</b>	1 m (39.37 inch)		

### SIDE B - HOST → SIDE A DEVICE IN SQUARE FLANGE RECEPTACLE

#### Designation

32242	Plating		-	Lenght	
	<b>G</b>	Olive drab cadmium		<b>015</b>	15 cm (5.91 inch)
<b>N</b>	Nickel	<b>030</b>	30 cm (11.81 inch)		
<b>ZN</b>	Black zinc nickel	<b>050</b>	50 cm (19.68 inch)		
<b>BZ</b>	Marine bronze	<b>100</b>	1 m (39.37 inch)		

**Important note:**

- For other codings, please consult us.


# USB3 TYPE A - TYPE C - ADAPTER



## Overall dimension

### Jam nut receptacle - Shell type 7 - Hexagonal nut mounting

Part number type: **31932X-XXX**  
**32241X-XXX**

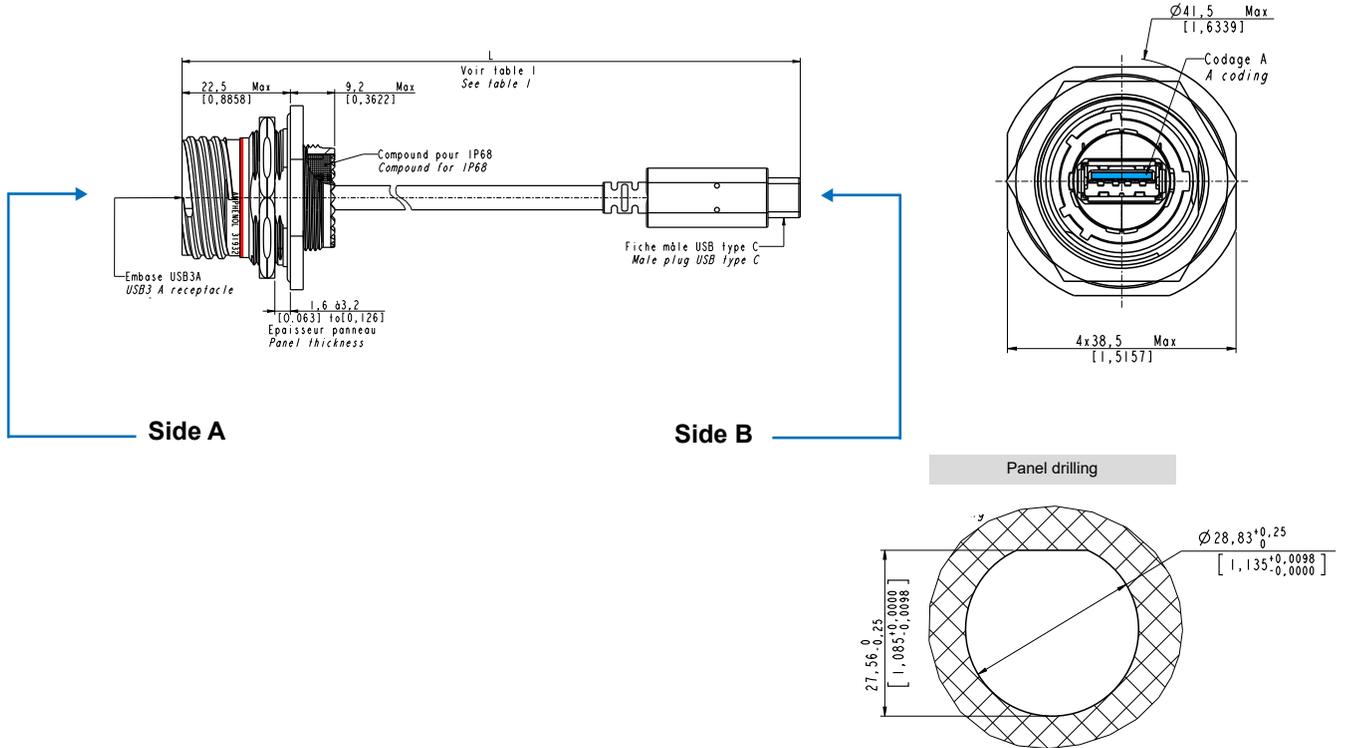

### SIDE A - HOST → SIDE B DEVICE IN JAM NUT RECEPTACLE

Designation		Plating		Lenght	
<b>31932</b>	<b>G</b>	Olive drab cadmium	-	<b>015</b>	15 cm (5.91 inch)
	<b>N</b>	Nickel		<b>030</b>	30 cm (11.81 inch)
	<b>ZN</b>	Black zinc nickel		<b>050</b>	50 cm (19.68 inch)
	<b>BZ</b>	Marine bronze		<b>100</b>	1 m (39.37 inch)

### SIDE B - HOST → SIDE A DEVICE IN JAM NUT RECEPTACLE

Designation		Plating		Lenght	
<b>32241</b>	<b>G</b>	Olive drab cadmium	-	<b>015</b>	15 cm (5.91 inch)
	<b>N</b>	Nickel		<b>030</b>	30 cm (11.81 inch)
	<b>ZN</b>	Black zinc nickel		<b>050</b>	50 cm (19.68 inch)
	<b>BZ</b>	Marine bronze		<b>100</b>	1 m (39.37 inch)

**Important note:**

- For other codings, please consult us.

USB3.2  
USB2.0  
Cables and cordsets  
Adapters and access points  
Rugged electronics  
Accessories  
Assembly instructions  
How to order


# USB3 TYPE A - TYPE C - ADAPTER



## Overall dimension

### Reduced flange receptacle - Jam nut shell type 7 - Castle nut mounting

Part number type: **31931X-XXX**  
**32240X-XXX**

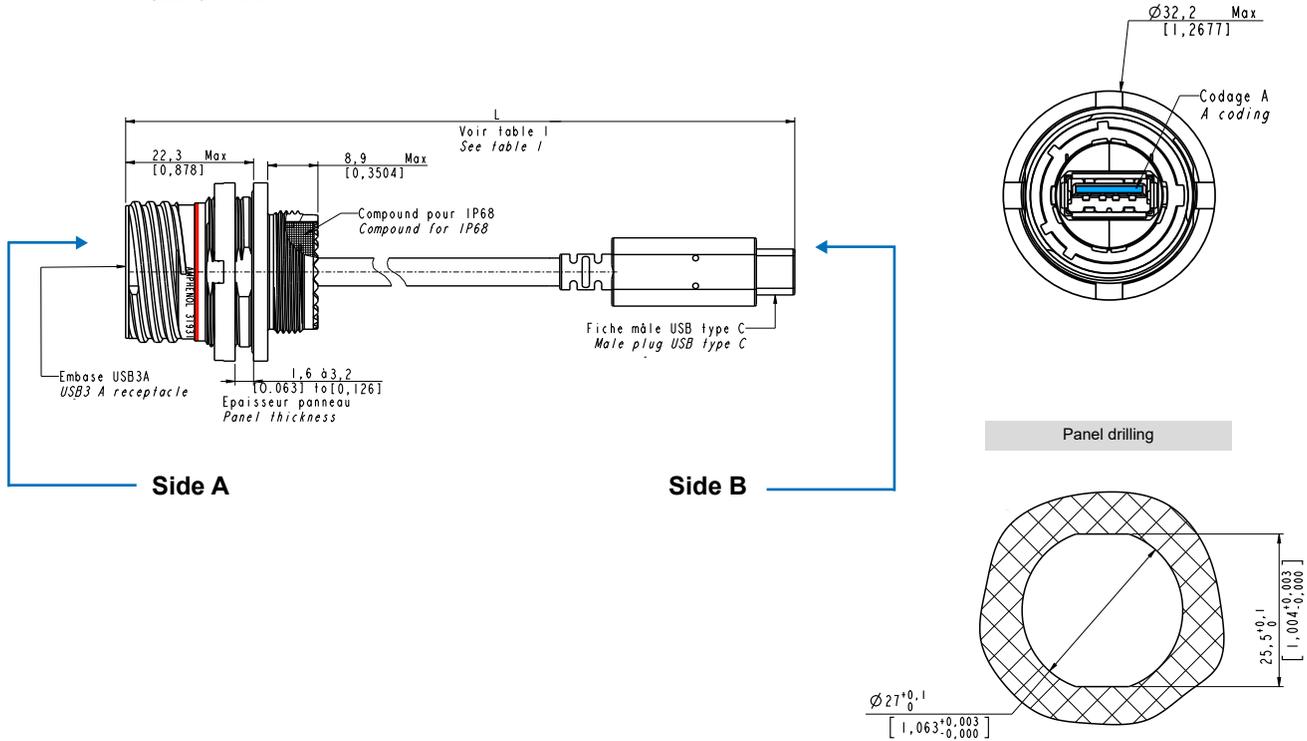

### SIDE A - HOST → SIDE B DEVICE IN REDUCED FLANGE RECEPTACLE

#### Designation

31931	Plating		-	Lenght	
	<b>G</b>	Olive drab cadmium		<b>015</b>	15 cm (5.91 inch)
<b>N</b>	Nickel	<b>030</b>	30 cm (11.81 inch)		
<b>ZN</b>	Black zinc nickel	<b>050</b>	50 cm (19.68 inch)		
<b>BZ</b>	Marine bronze	<b>100</b>	1 m (39.37 inch)		

### SIDE B - HOST → SIDE A DEVICE IN REDUCED FLANGE RECEPTACLE

#### Designation

32240	Plating		-	Lenght	
	<b>G</b>	Olive drab cadmium		<b>015</b>	15 cm (5.91 inch)
<b>N</b>	Nickel	<b>030</b>	30 cm (11.81 inch)		
<b>ZN</b>	Black zinc nickel	<b>050</b>	50 cm (19.68 inch)		
<b>BZ</b>	Marine bronze	<b>100</b>	1 m (39.37 inch)		

**Important note:**




- For other codings, please consult us.

# USB3 TYPE A - TYPE C - ADAPTER

## USB3 Adapter selection guide

Define your own solution by selecting options in the scheme below

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order

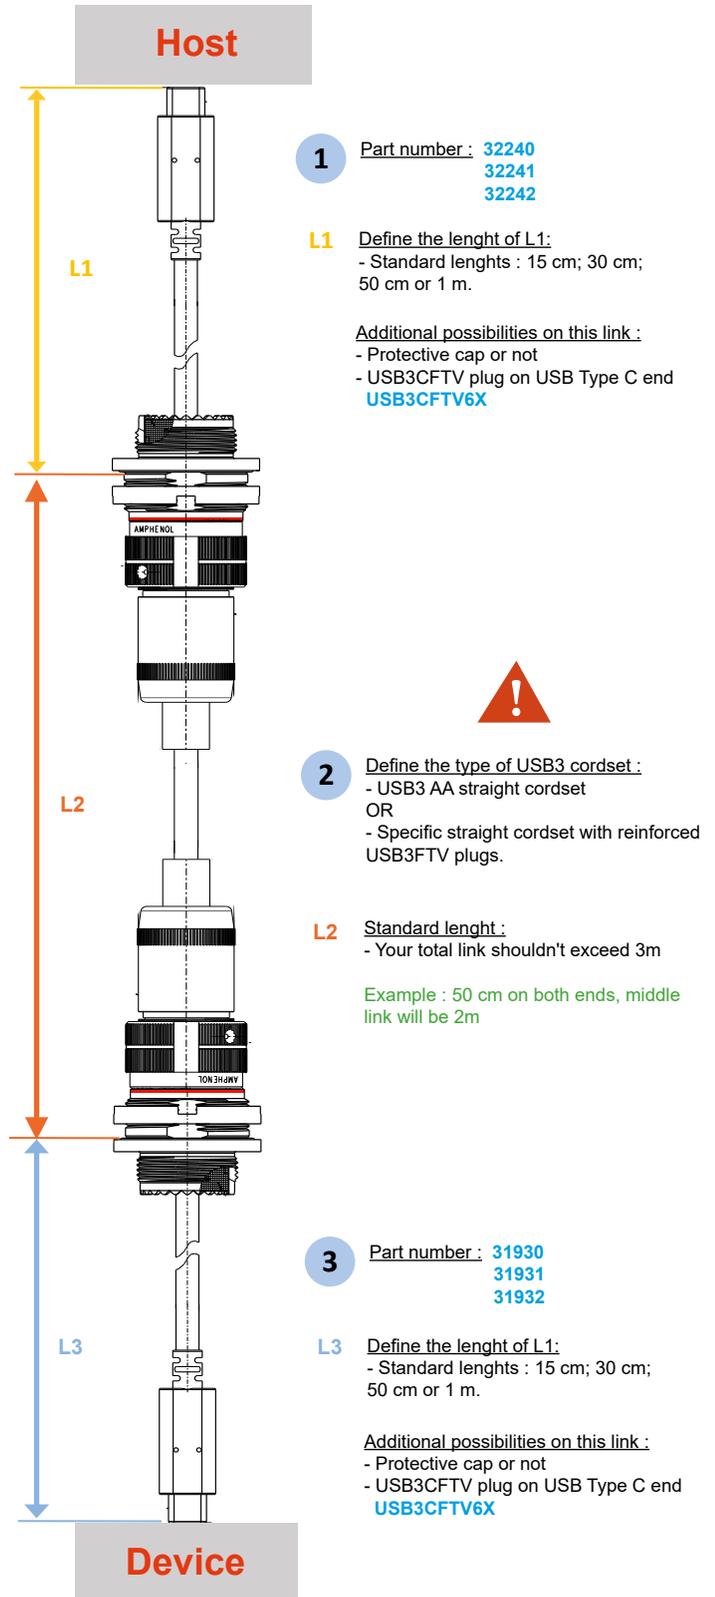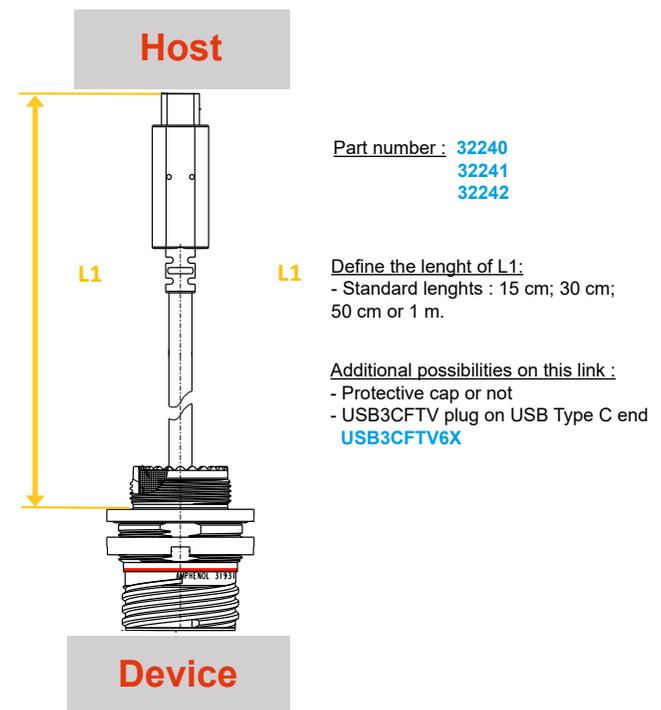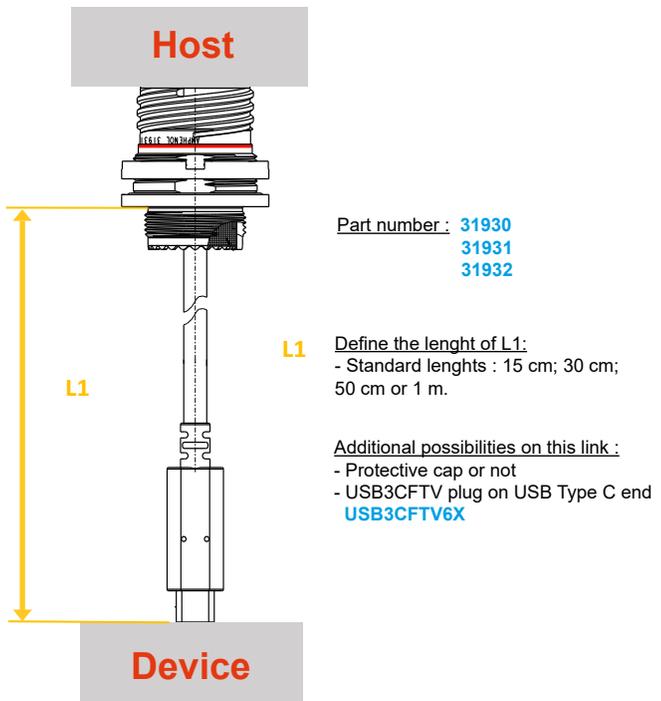

## μCom-USB3.2 & TVμCom-USB3.2



### Description

These specific adaptations of μCom and TVμCom are optimized for USB3.2 Gen1 and intended for connection and disconnection in harsh environment military and aerospace applications.

### Main Features

#### Data Transmission:

- **USB specification 3.2 Gen1.**
- **Data rate up to 5Gb/s for high speed USB**
- **Hot plugging: enables connection and disconnection while the system is running.**
- **4 pairs totally insulated throughout the connector: minimum cross-talk between pairs.**
- **Patented special interfacial shapes: minimum perturbation at the interface of each pair.**

#### μCom:

- Environmental testing based on MIL-DTL-38999 series III military specifications (Thread version).
- Environmental testing based on MIL-DTL-26482 military specifications (Push-pull version).
- Miniature: 15 mm (.59") max external diameter.
- Receptacle and in-line receptacle compatible with both Thread and Push-pull plugs.
- Machined brass shells
- Salt spray:
  - 500 h with Unplated brass shell ✓
  - 500 h with Olive Drab Cadmium plating
  - 500 h with Black Nickel plating ✓



✓ : RoHS compliant

#### TVμCom:

- Based on MIL-DTL-38999 series III – Shell size 11
- Aluminium shells
- Salt spray:
  - 48 h with Nickel plating ✓
  - 500 h with Olive Drab Cadmium plating
  - 500 h with Black Zinc Nickel plating ✓
  - 500 h with Tin-zinc plating ✓ **NEW**
  - 1000 h with Marine Bronze shell ✓
  - 500 h with Passivated Stainless steel shell ✓
- Solder contact: max AWG24
- Crimp contact: AWG 24 to 28
- Temperature range: - 55°C / + 125°C
- IP68 sealing mated and unmated for PCB receptacles
- 1500 Vrms Dielectric Withstanding Voltage



✓ : RoHS compliant

**How to order :** Please refer to page 119 & 120

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order


# μCom-USB3.2



## Overall dimension


### Plug with banding platform

Part number type: **UCOM-USB3 PT X X B**

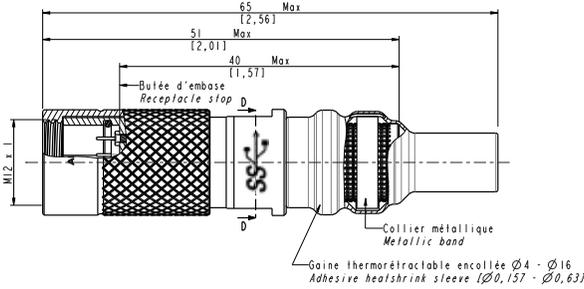

Thread version


Part number type: **UCOM-USB3 PP X X B**

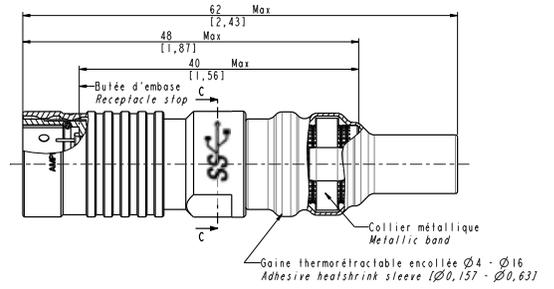

Push-pull version


### Plug with cable gland backshell

Part number type: **UCOM-USB3 PT X X GA**

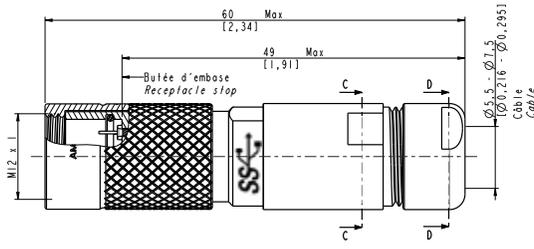

Thread version


Part number type: **UCOM-USB3 PP X X GA**

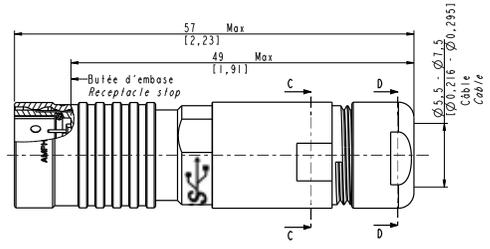

Push-pull version


### In-line receptacle

Part number type: **UCOM-USB3 L X X B**

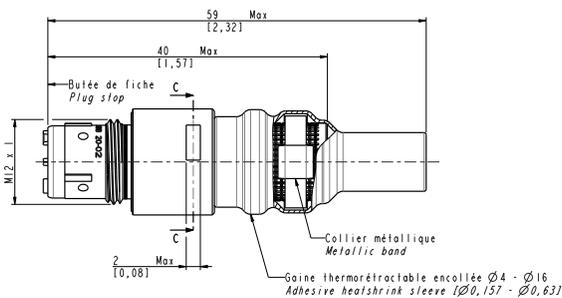

Banding platform

Part number type: **UCOM-USB3 L X X GA**

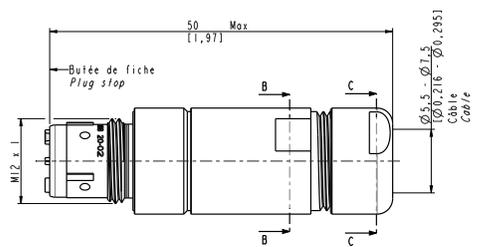

Cable gland backshell


# μCom-USB3.2



## Overall dimension

### Panel mount receptacle with banding platform


Part number type: **UCOM-USB3 R X X**

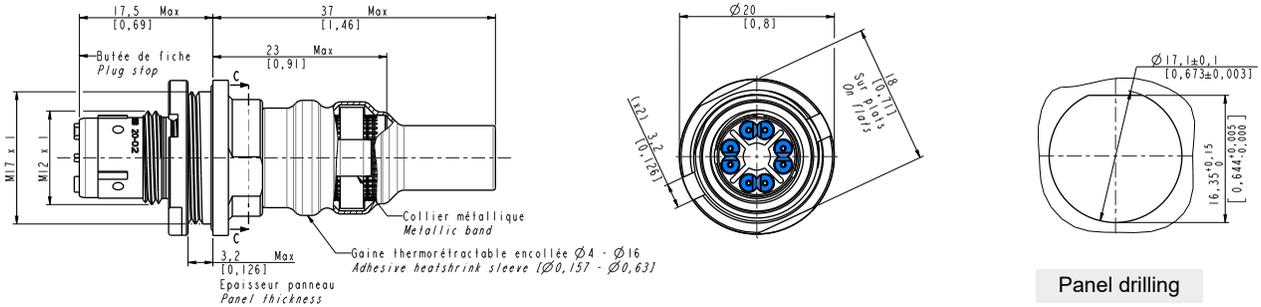

Panel drilling

### PCB receptacle for printed circuit board

Part number type: **UCOM-USB3 RP X**

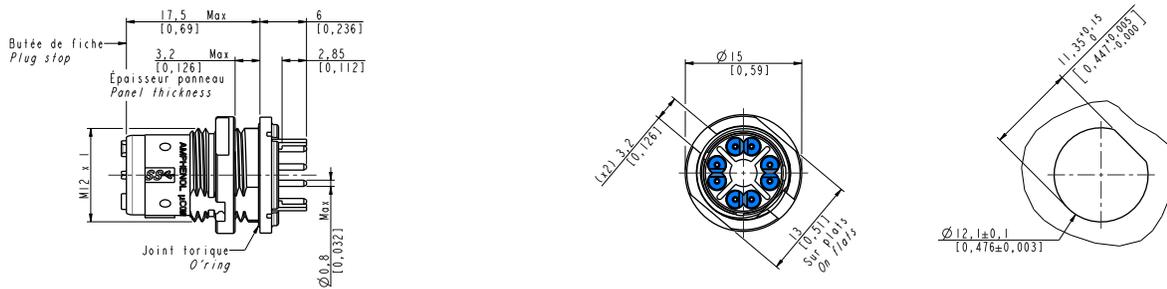

Panel drilling

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order


# TVμCom-USB3.2



## Overall dimension




### Plug with banding platform

Part number type: **TV06 UCOM-USB3 X X -11 X X**

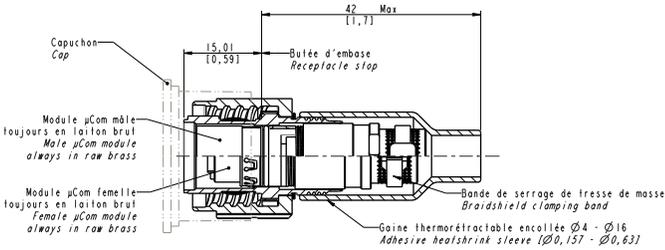

### Jam nut receptacle with banding platform




Part number type: **TV07 UCOM-USB3 X X -11 X X**

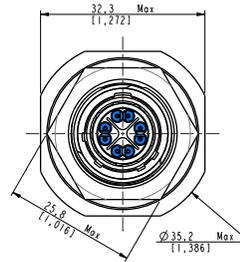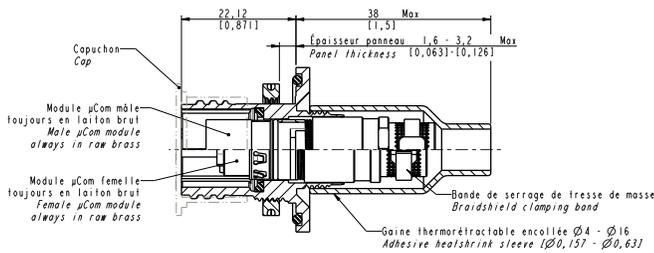

Panel drilling


### Square flange receptacle with banding platform

Part number type: **TVP00 UCOM-USB3 X X -11 X X**

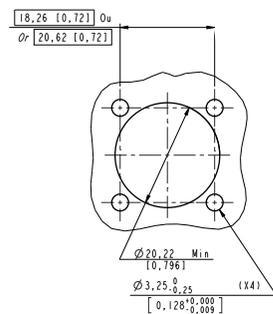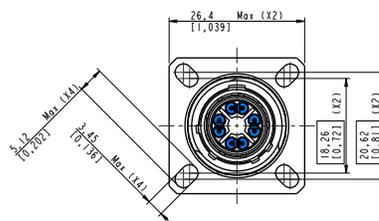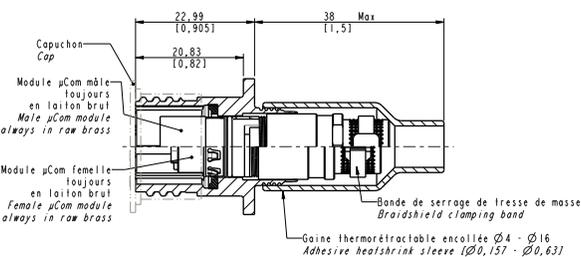

Panel drilling



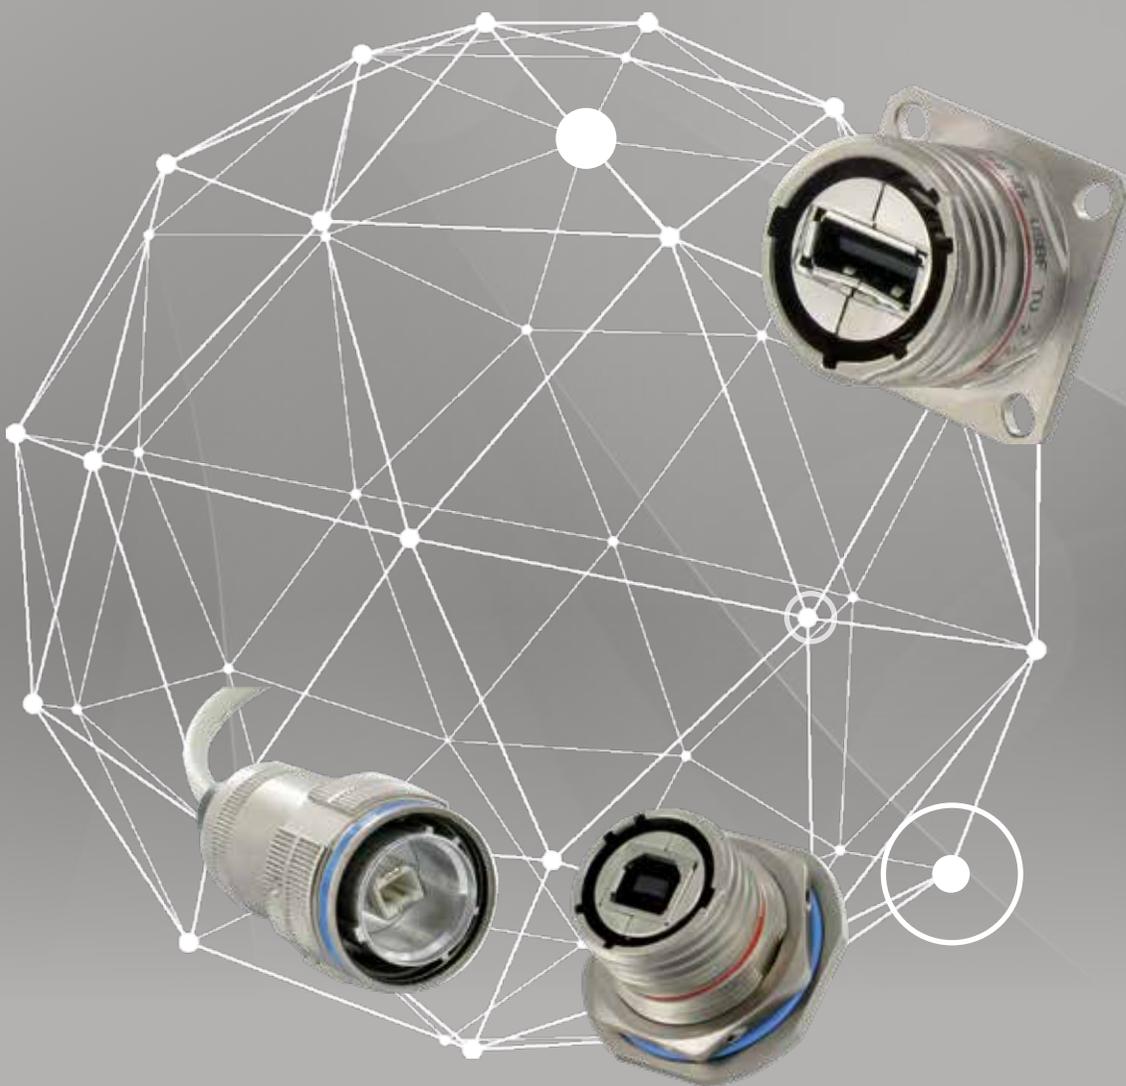

## USB2.0



## Table of contents

<b>USB2.0</b>	<b>43</b>
USBFTV™	44
USBFTV™ - Transversally sealed and hermetic receptacle	49
USBFTV™ - Stand-off receptacle	54
USBFTV™ - Through-bulkhead receptacle	56
USBFTV™ - Receptacle with 360° EMI backshell	57
USBFTV™ - Atex Zone 2	58
USBBFTV	60
USBBFTV - Transversally sealed receptacle	64
USBBFTV - Stand-off receptacle	65

USB3.2

USB2.0

Cables and  
cordsetsAdapters and  
access pointsRugged  
electronics

Accessories

Assembly  
instructions

How to order

# USBFTV™



## Description

USBFTV™ is a complete ruggedized solution around USB2.0 Type-A standard using a Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) to connect the plug and receptacle.

This solution allows you to insert a standard USB 2.0 cordset into a metallic plug which will protect it from shocks, dust and fluids. The assembly of this ruggedized plug doesn't require any tools and is easily assembled on the field. Perfectly adapted to the USB2.0 standard, you have two coding possibilities to facilitate coupling when you have several receptacles on a panel.

The corresponding USBFTV™ receptacle dedicated to be mounted on your panel enables you to reinforce and protect your system against leakage, shocks, vibrations and much more. This receptacle part is delivered with a defined coding when ordered but can be conveniently changed with our dedicated USBF ODE tool.

## Main features

### MAIN CHARACTERISTICS

- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15
- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection
- 2 mechanical coding / polarization possibilities by the user (receptacle insert rotation)
- USBFTV™ plug retention in the receptacle: 100 N in the axis
- Mating cycles: 500 minimum

### DATA TRANSMISSION

- USB-A
- USB specification 2.0
- Data rate: up to 480 Mbps for high speed USB

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h black zinc nickel ✓
  - 500 h with olive drab cadmium
  - 500 h with Tin-zinc plating ✓
  - 1000 h with marine bronze shell ✓
- Fire retardant / low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06: weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Temperature range: - 40°C / +85°C

### APPLICATIONS


- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas

✓ : RoHS compliant

**How to order :** Please refer to page 121

## Back terminations


Type 1:  
female USB-A



Type 2:  
solder 4 Tinned holes to solder your cable



View of the PCB of the Type 2 version with  
4 tinned holes for solder termination




# USBFTV™



## Overall dimension


Plug - Shell type 6

Part number type: **USBFTV 6 X**

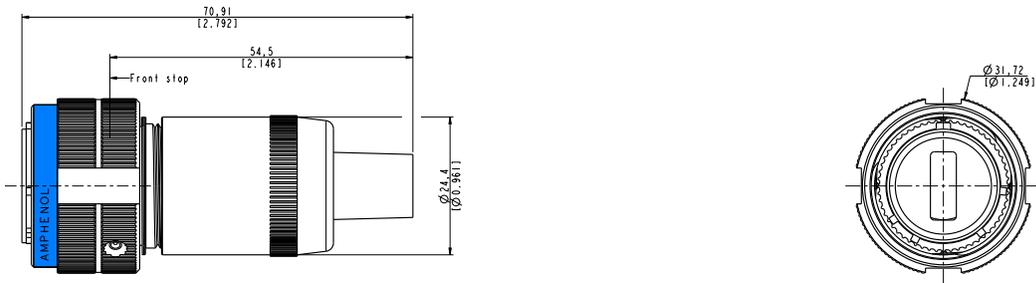


Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination type 1

Part number type: **USBFTV 2 1 X**

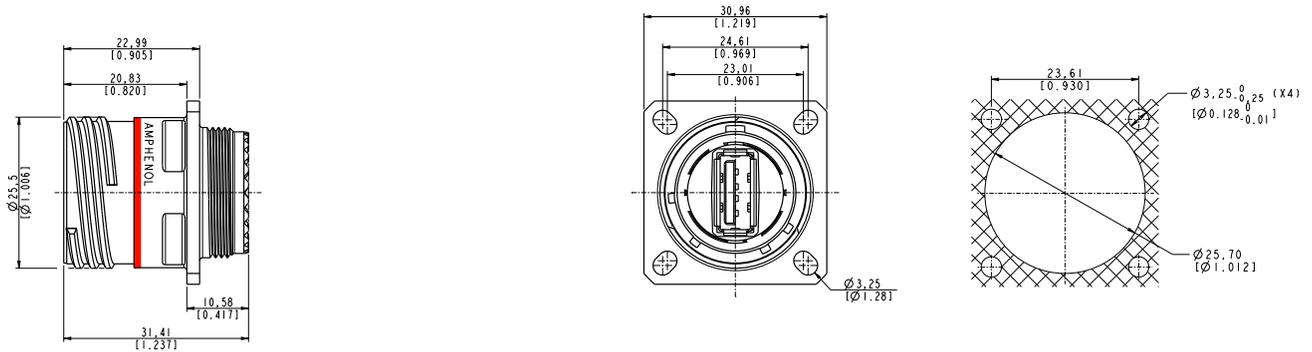

Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination type 1 - Metal backshell

Part number type: **USBFTV 2 PE 1 X**

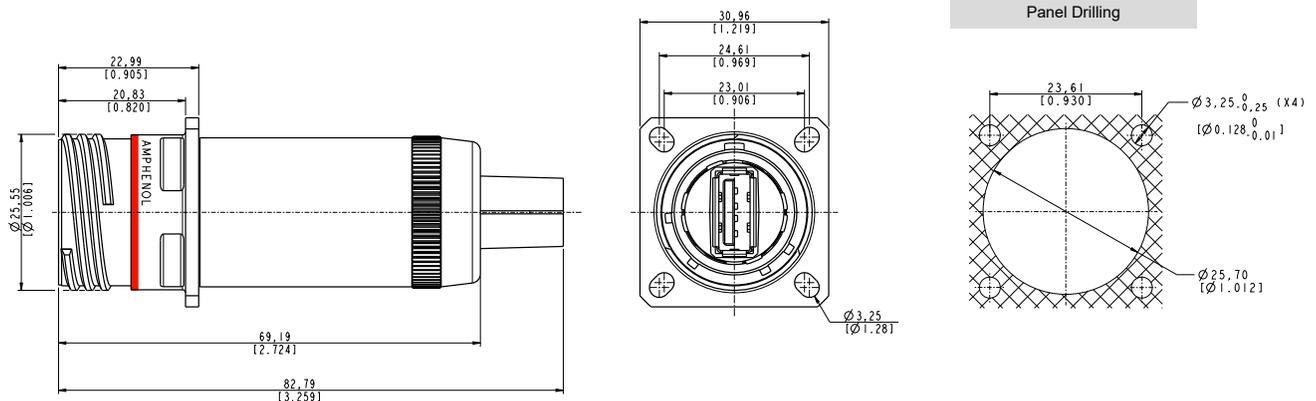




# USBFTV™






## Overall dimension

Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination type 2 - Metal backshell

Part number type: **USBFTV 2 PE 2 X**

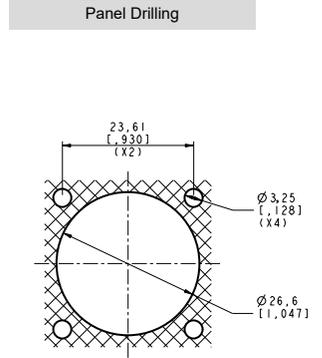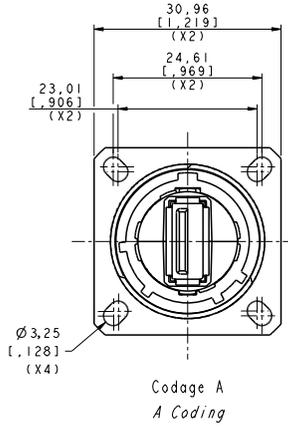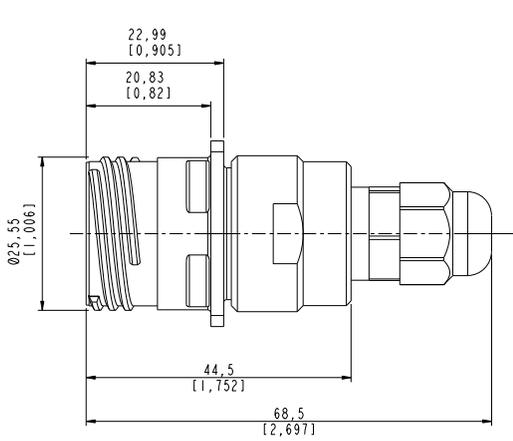

Part number type: **USBFTV 2 PEM 2 X**

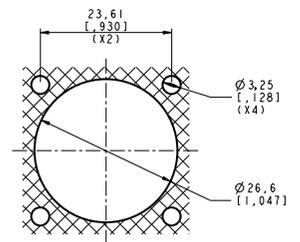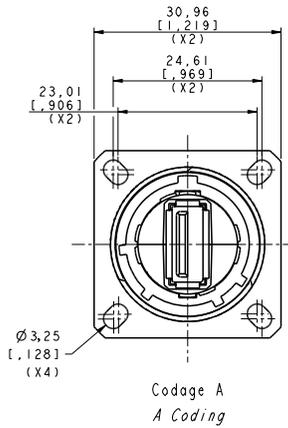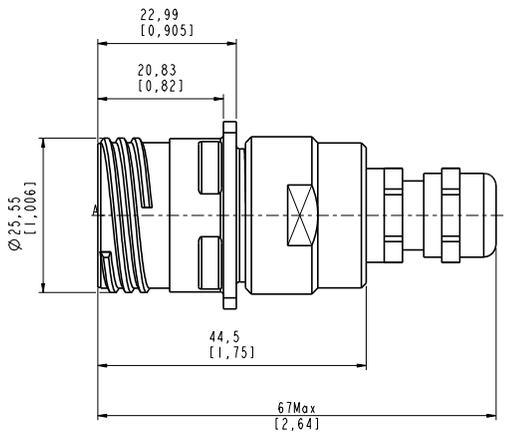




## Overall dimension


Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination type 1

Part number type: **USBFTV 7 1 X**

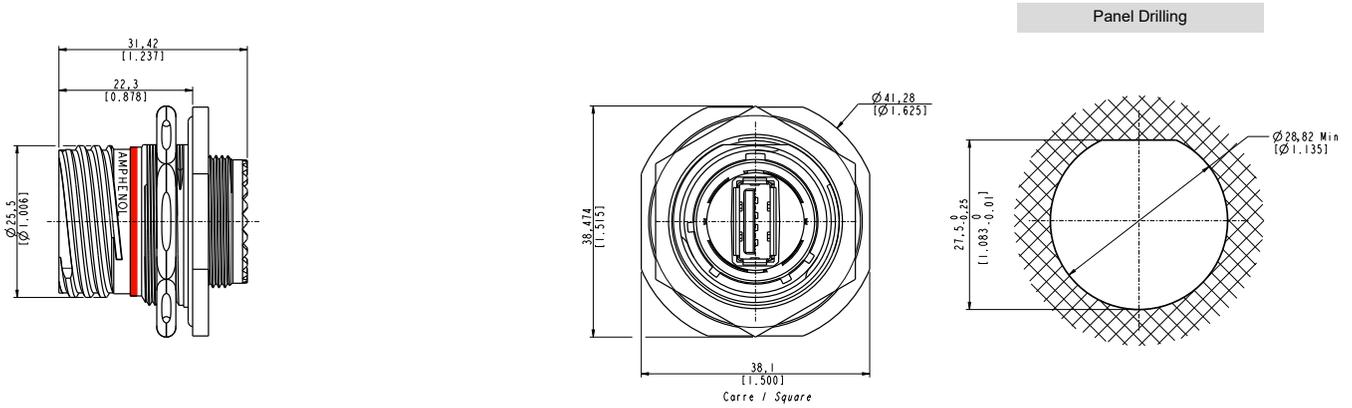

Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination type 1 - Metal backshell

Part number type: **USBFTV 7 PE 1 X**

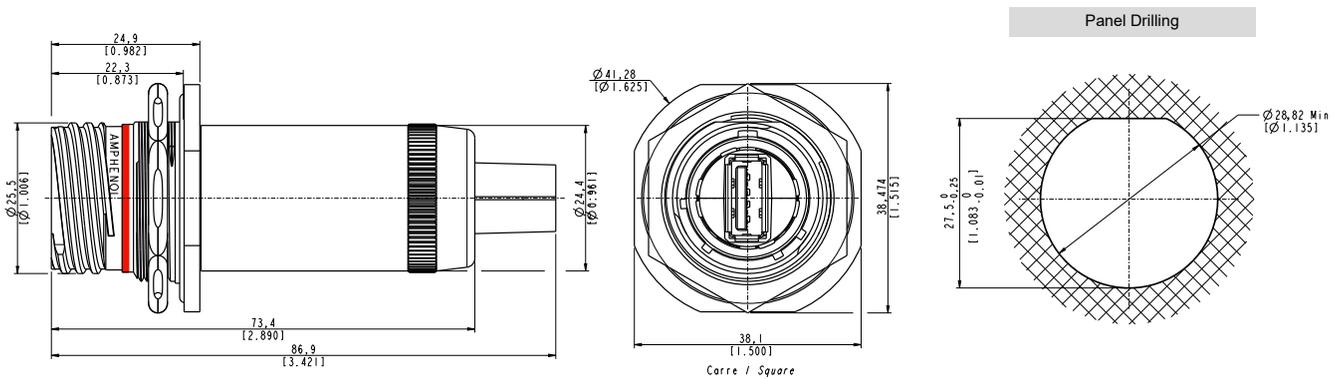


# USBFTV™




## Overall dimension

Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination type 2 - Metal backshell

Part number type: **USBFTV 7 PE 2 X**

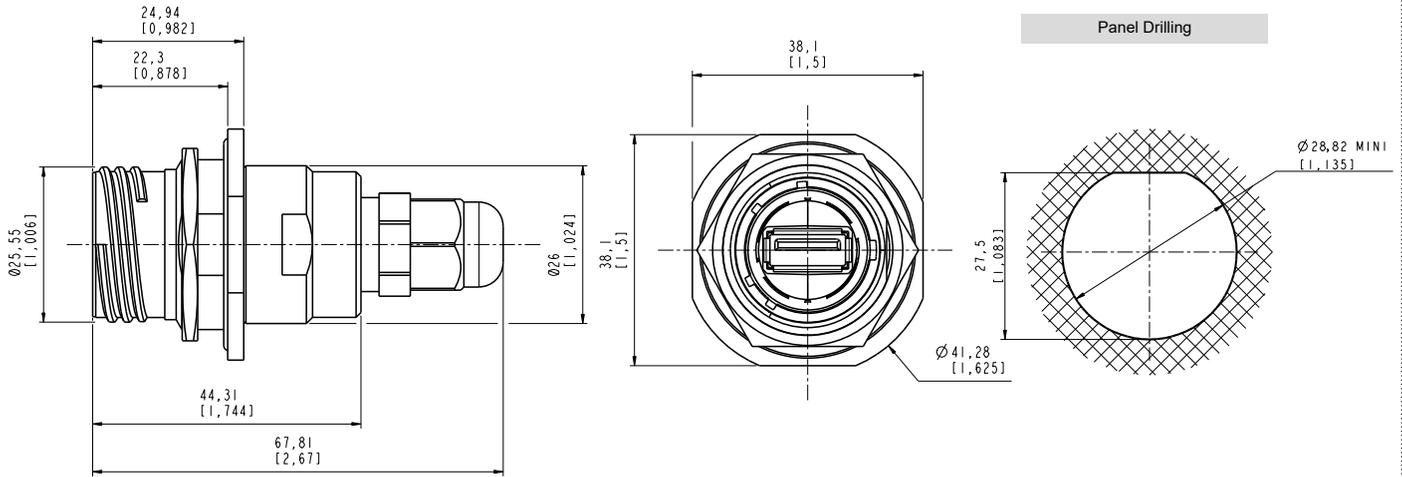

Part number type: **USBFTV 7 PEM 2 X**

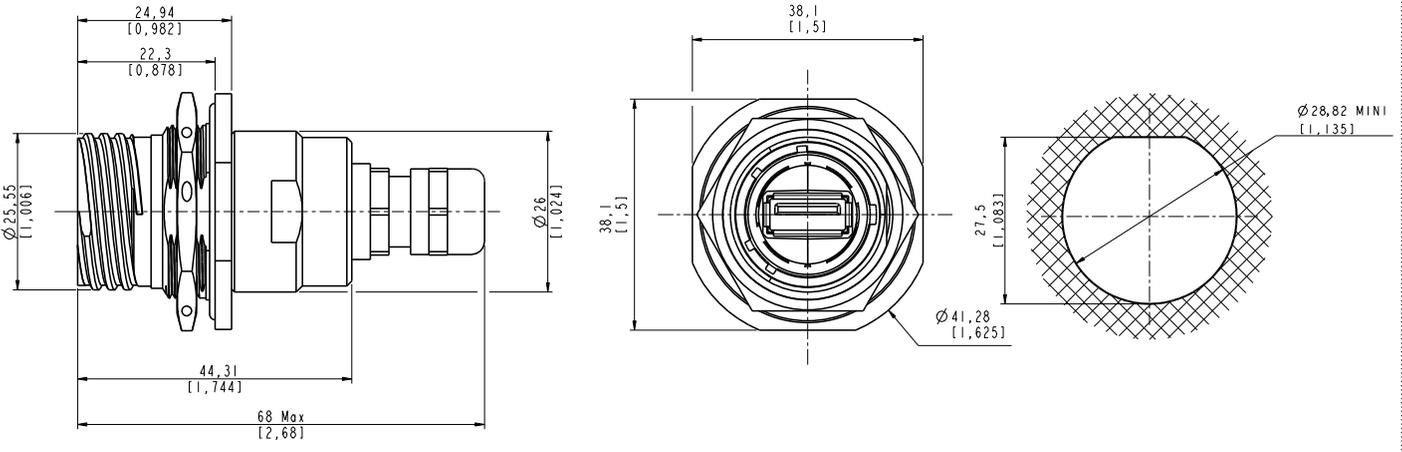

# USBFTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

## Description



The transversally sealed receptacle is in all aspect equivalent to the standard and in addition, is improved with compound at the rear of the receptacle. This will prevent the sealing of the receptacle when unmated with his plug or protective cap.

The hermetic solution, as the transversally sealed one, is compounded at the rear of the receptacle. Helium leakage is less than 1.10-6 cm<sup>3</sup> per second [0.1 micron cubit ft per hour] at one bar [15 psi] pressure differential. The test is performed on all hermetic receptacles.

## Main features

### MAIN CHARACTERISTICS

- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15
- 2 mechanical coding/polarization possibilities by the user (receptacle insert rotation)
- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection
- USBFTV™ plug retention in the receptacle: 100 N in the axis
- Mating cycles: 500 minimum

### DATA TRANSMISSION

- USB-A
- USB specification 2.0
- Data rate: up to 480 Mb/s for high speed USB

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 500 h with black zinc nickel ✓
  - 500 h with Tin-zinc plating ✓
  - 1000 h with marine bronze shell ✓
- Fire retardant / Low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06 > weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Temperature range: - 40°C / +85°C

### APPLICATIONS


- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas

✓ : RoHS compliant


**How to order :** Please refer to page 122

## Back terminations

USB cable end type A

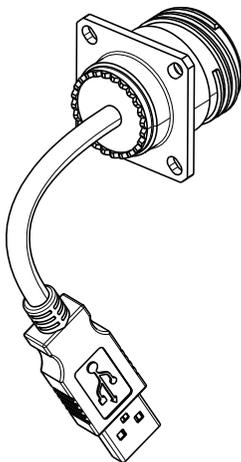

USB cable end type «OPEN»

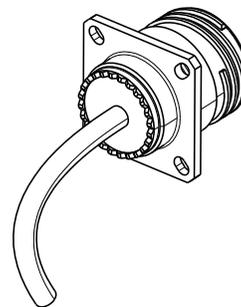



# USBFTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE



## Overall dimension



**Receptacle** - Square flange receptacle - 4 mounting holes - Shell type 2 - USB-A or Open cordset

Part number type: **USBFTV 2 SA 2 X XX A**

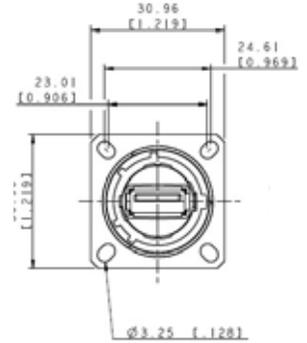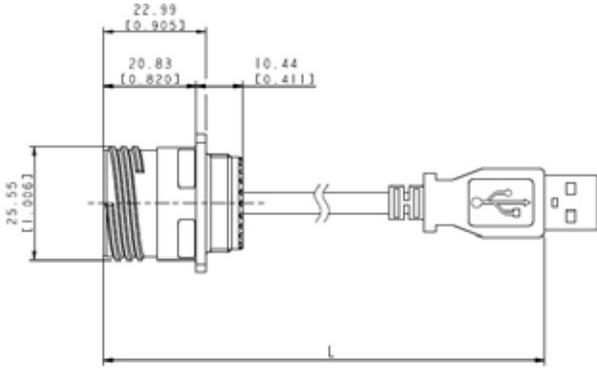



Panel Drilling

Part number type: **USBFTV 2 SA 2 X XX OPEN**

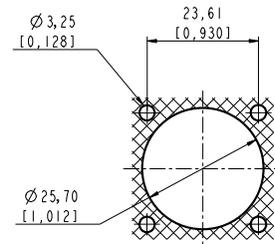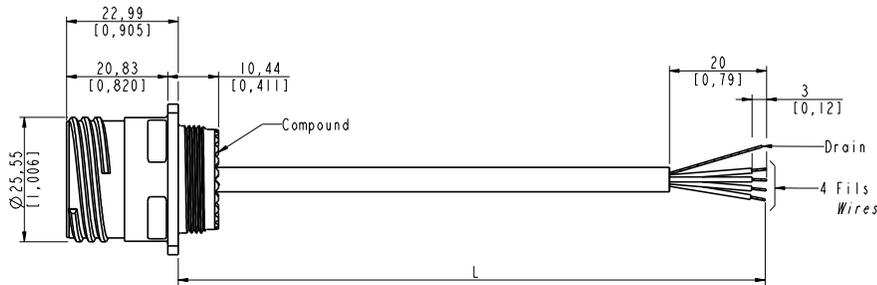



**Receptacle** - Square flange receptacle - 4 mounting holes - Shell type 2 - USB-A or Open cordset

Part number type: **USBFTV 2 PE SA 2 X XX A**  
**USBFTV 2 PEM SA 2 X XX A**

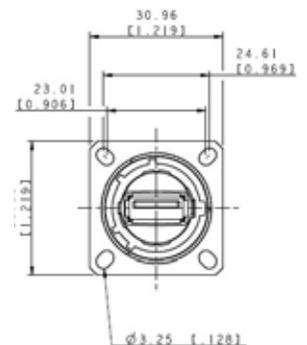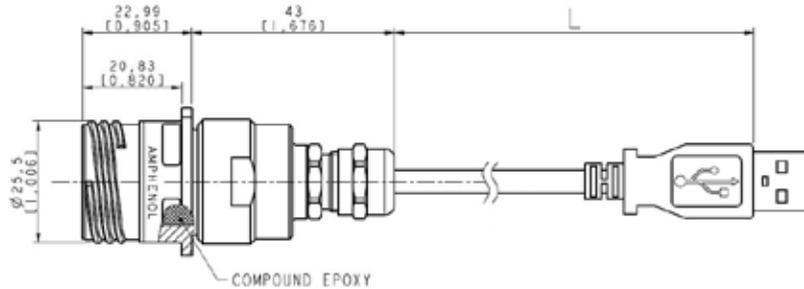

Panel Drilling

Part number type: **USBFTV 2 PE SA 2 X XX OPEN**  
**USBFTV 2 PEM SA 2 X XX OPEN**

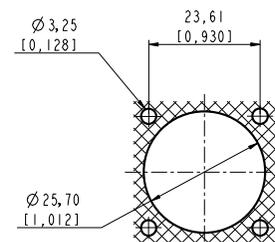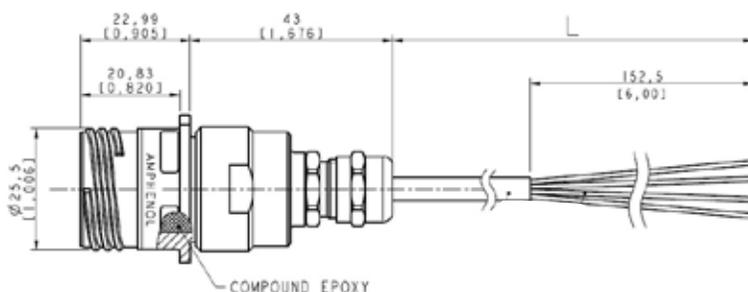



# USBFTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

## Overall dimension





**Receptacle** - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - USB-A or Open cordset

Part number type: **USBFTV 7 SA 2 X XX A**

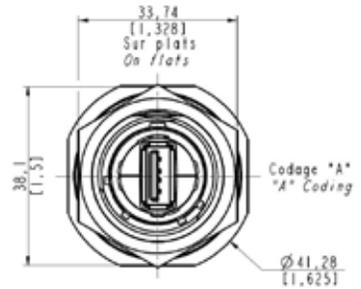
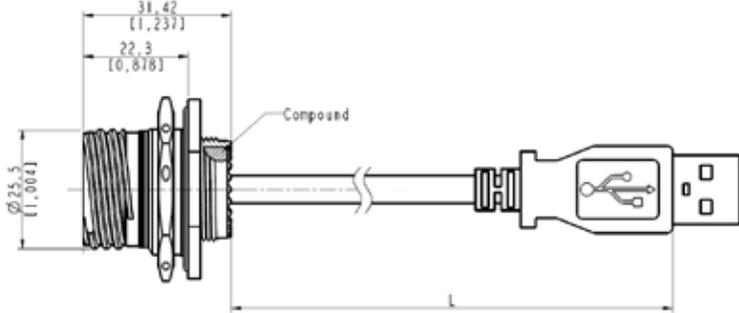


Part number type: **USBFTV 7 SA 2 X XX OPEN**

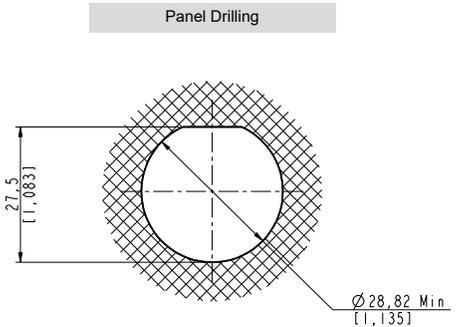
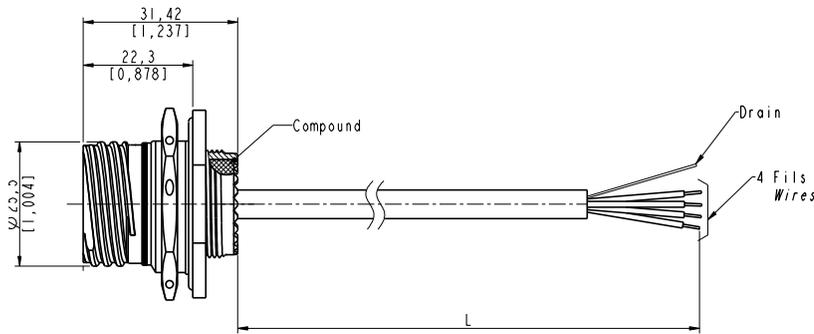


**Receptacle** - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - USB-A or Open cordset

Part number type: **USBFTV 7 PE SA 2 X XX A**  
**USBFTV 7 PEM SA 2 X XX A**

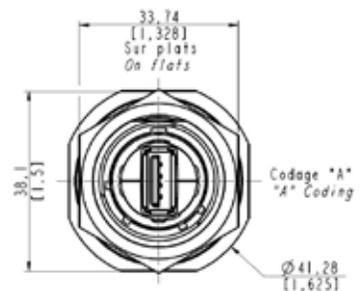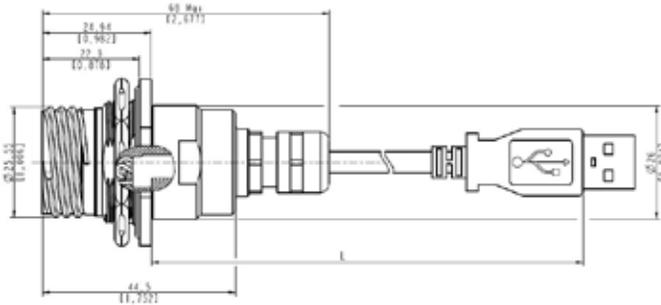

Part number type: **USBFTV 7 PE SA 2 X XX OPEN**  
**USBFTV 7 PEM SA 2 X XX OPEN**

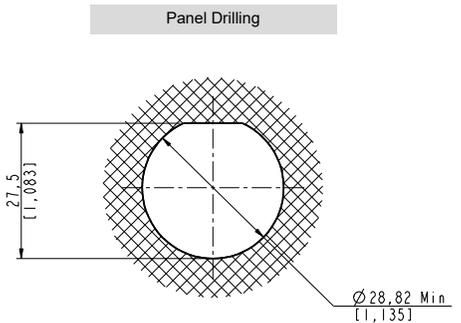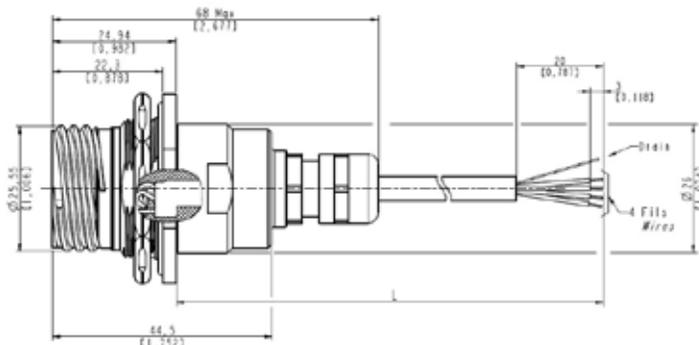



# USBFTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

## Overall dimension





**Receptacle** - Square flange receptacle - 4 mounting holes - Shell type 2- USB-A or Open cordset

Part number type: **USBFTV 2 HA 2 X XX A**

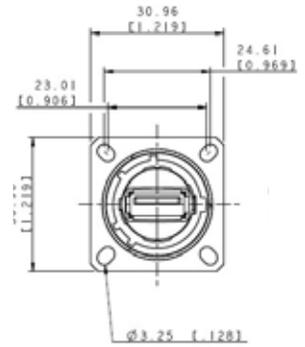
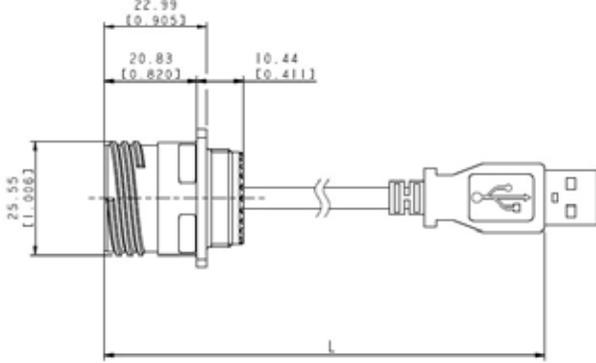


Part number type: **USBFTV 2 HA 2 X XX OPEN**

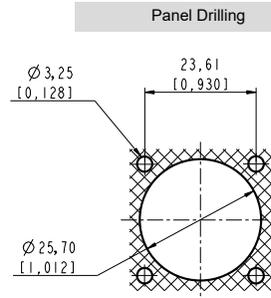
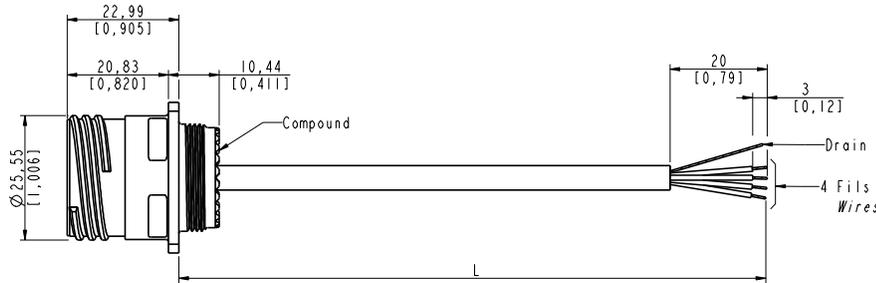


**Receptacle** - Square flange receptacle - 4 mounting holes - Shell type 2 - Metal backshell - USB-A or Open cordset

Part number type: **USBFTV 2 PE HA 2 X XX A**  
**USBFTV 2 PEM HA 2 X XX A**

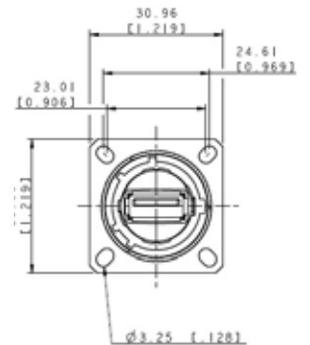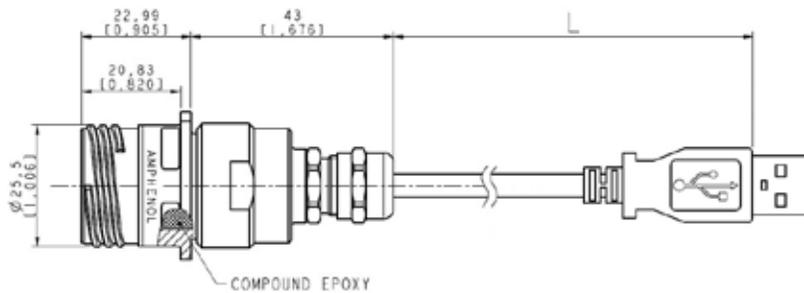

Part number type: **USBFTV 2 PE HA 2 X XX OPEN**  
**USBFTV 2 PEM HA 2 X XX OPEN**

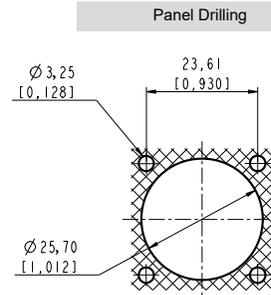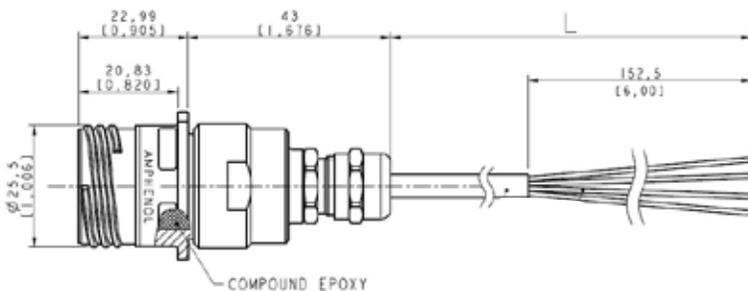



# USBFTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

## Overall dimension





**Receptacle** - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - USB-A or Open cordset

Part number type: **USBFTV 7 HA 2 X XX A**

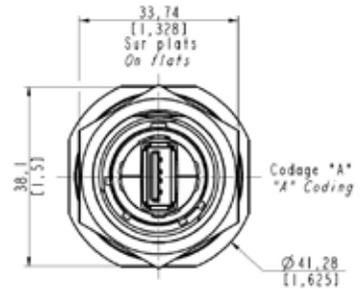
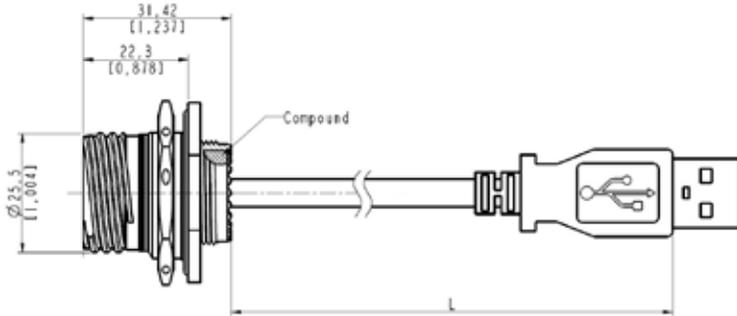


Part number type: **USBFTV 7 HA 2 X XX OPEN**

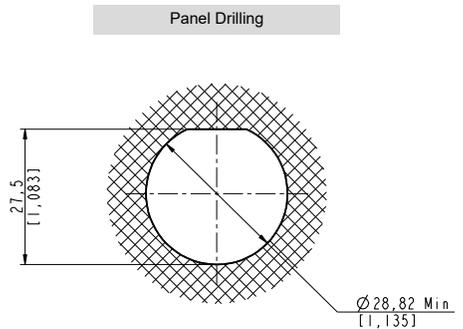
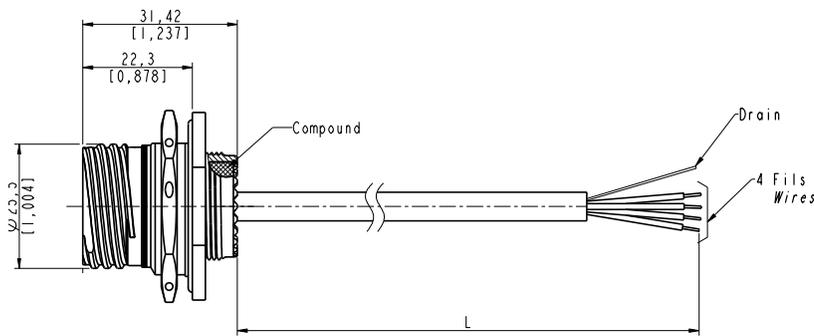


**Receptacle** - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Metal backshell - USB-A or Open cordset

Part number type: **USBFTV 7 PE HA 2 X XX A**  
**USBFTV 7 PEM HA 2 X XX A**

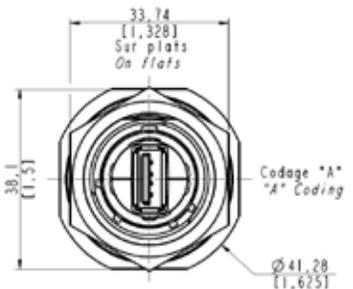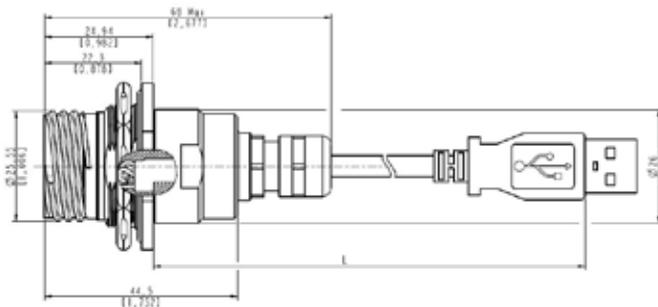

Part number type: **USBFTV 7 PE HA 2 X XX OPEN**  
**USBFTV 7 PEM HA 2 X XX OPEN**

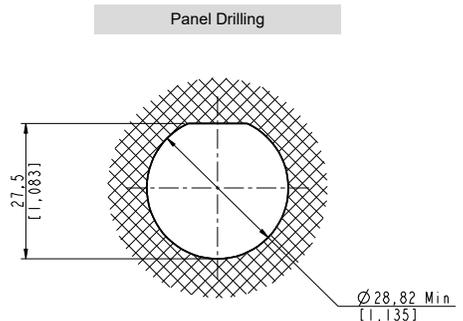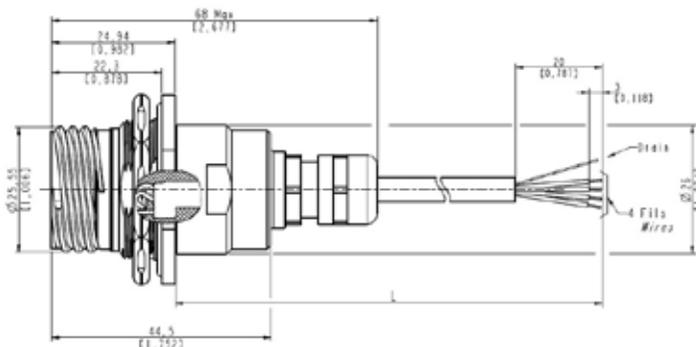

# USBFTV™ - STAND OFF RECEPTACLE




## Description

This enhanced design allows you to mount the connector shell directly on your PC board. Soldering your contacts directly on the board will help to save you a lot of space inside of your system. As this double-flange of this connector is directly fixed on the board, mechanical stresses are absorbed by the shell and not the contacts. In addition to this benefit, the sealing is improved by the compounded receptacle.

## Overall dimension

Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - PC Tails contacts

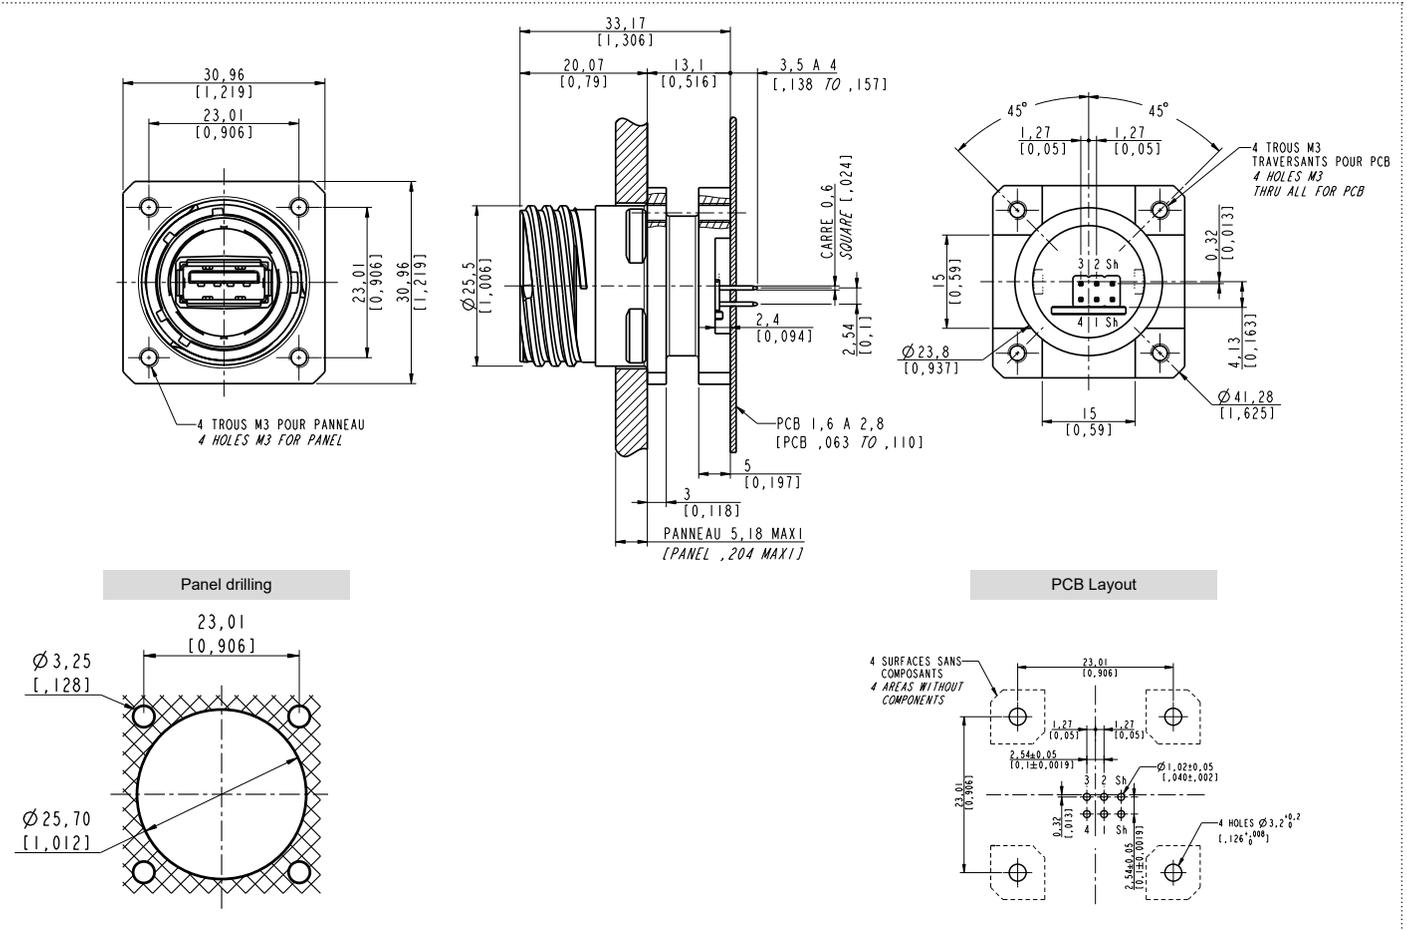

Part number for coding A	Part number for coding B	Plating
USBFTV 2S A 5 N F459	USBFTV 2S B 5 N F459	Nickel ✓
USBFTV 2S A 5 G F459	USBFTV 2S B 5 G F459	Olive drab cadmium
USBFTV 2S A 5 ZN F459	USBFTV 2S B 5 ZN F459	Black zinc nickel ✓

✓: RoHS compliant



# USBFTV™ - THROUGH-BULKHEAD RECEPTACLE






## Description




The USBFTV™ Through-bulkhead is a double-ended receptacle that enables you to connect two USBFTV plugs on both sides of your panel. In your system, it provides you the best protection and remains very easy to assemble.

## Overall dimension

Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2

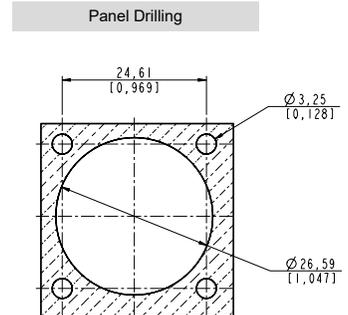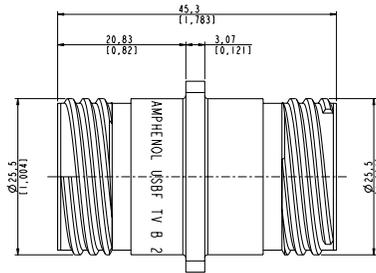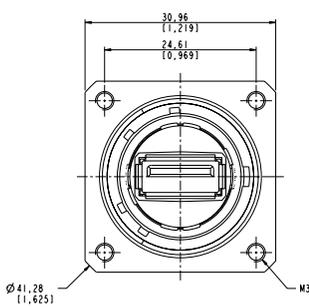

Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7

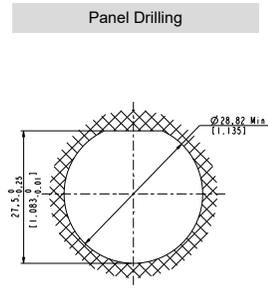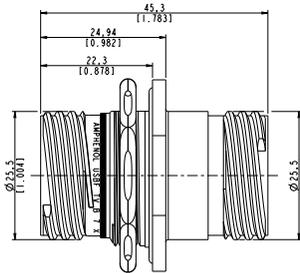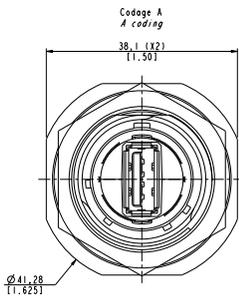

Part number for square flange receptacle	Part number for Jam nut receptacle	Plating
USBFTV B 2 N	USBFTV B 7 N	Nickel ✓
USBFTV B 2 G	USBFTV B 7 G	Olive drab cadmium
USBFTV B 2 ZN	USBFTV B 7 ZN	Black zinc nickel ✓

✓: RoHS compliant

USB3.2  
 USB2.0  
 Cables and cordsets  
 Adapters and access points  
 Rugged electronics  
 Accessories  
 Assembly instructions  
 How to order

# USBFTV™ - RECEPTACLE WITH 360° EMI BACKSHELL




## Description


This USBFTV™ kit includes all components necessary to build up a totally 360° EMI shielded receptacle. This kit is mainly composed of an 360° backshell and the USB receptacle with PCB with 4 tinned holes for solder termination. With this receptacle kit provided without cable, you have to solder the cable on the PCB. You can find below, wires and shielding wire cabling specifications. We recommend to use our reinforced USB cable page 53. If you prefer to use your own cable, please check with us to see if your USB cable is compatible. In the case you need a complete 360° EMI shield receptacle already mounted with a define length of cable, please consult us.

## Overall dimension

Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back terminations type 2

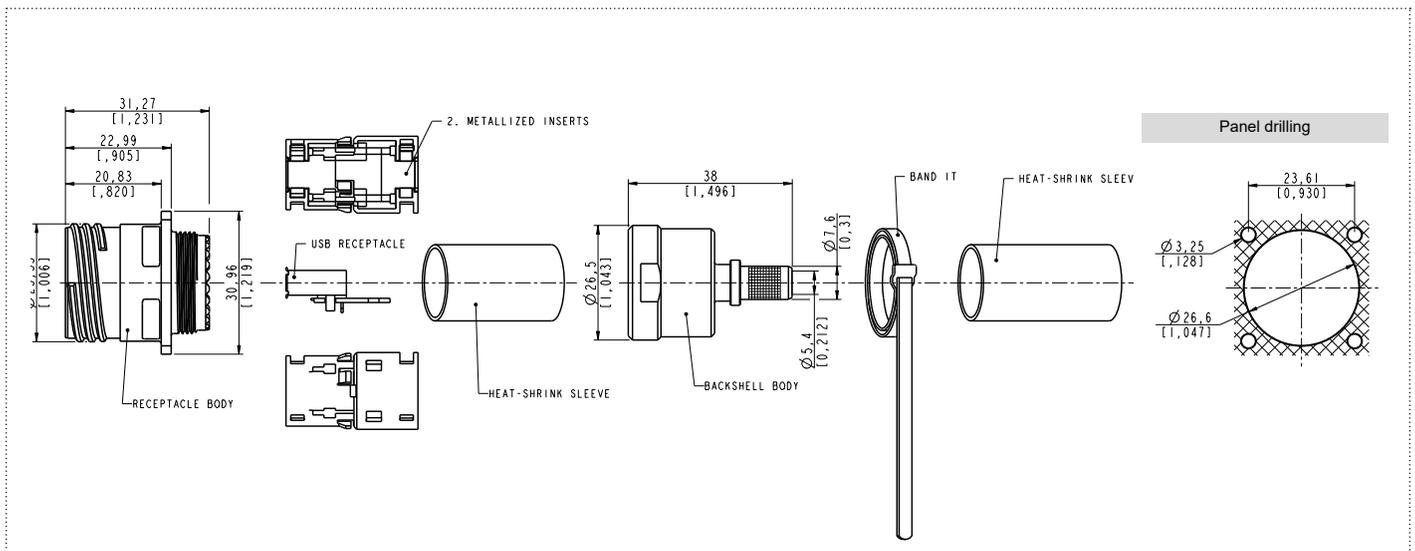

Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back terminations type 2

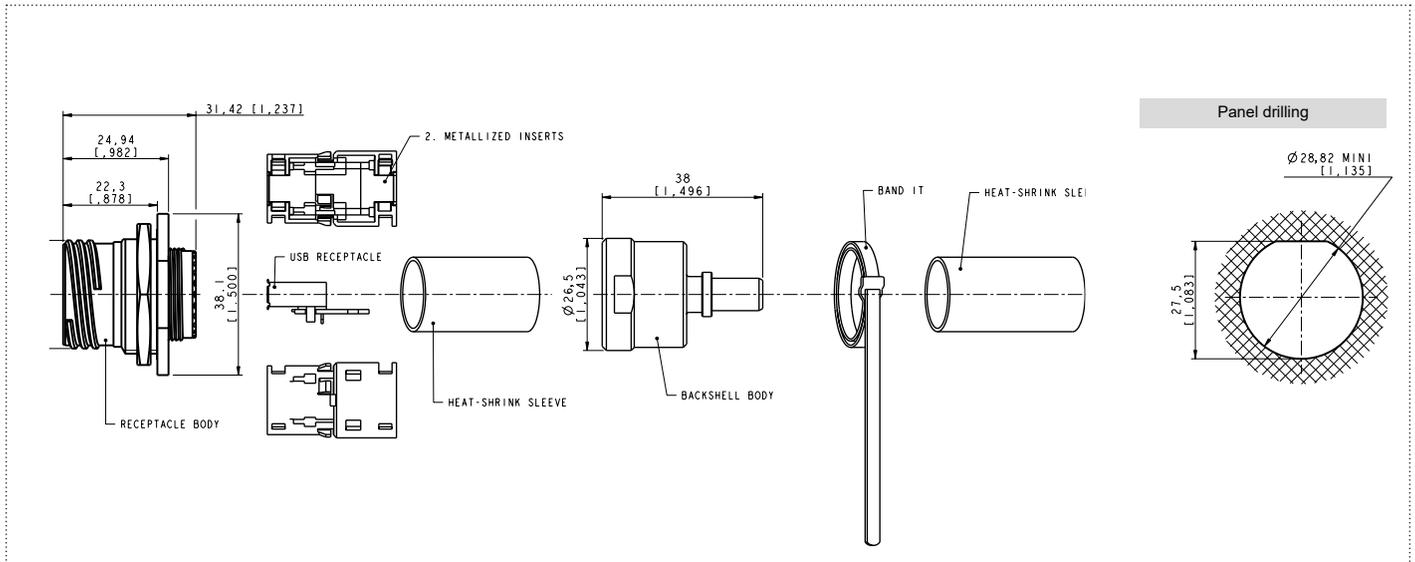

Part number for Square flange receptacle	Part number for Jam nut receptacle	Plating
KIT40263	KIT40245	Nickel ✓
KIT40263G	KIT40245G	Olive drab cadmium
KIT40263ZN	KIT40245ZN	Black zinc nickel plating ✓

✓ : RoHS compliant

# USBFTV™ - ATEX ZONE 2



## Description


USBFTVX connectors are the same as the standard USBFTV™, but in addition, they are certified for use in explosive environments. This range is fitted to be used in Atex zone 2 environments and 100% tested at 500V during 1 minute without sparking.

**How to order :** Please refer to page 123

## Overall dimension

Plug - Shell type 6



Part number type: **USBFTVX 6 X**

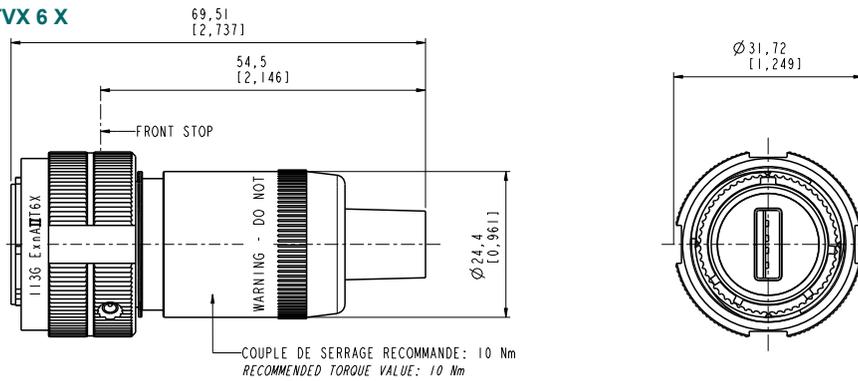


Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - USB-A or Open cordset

Part number type: **USBFTVX 2S X 2 X XX A**



Part number type: **USBFTVX 2S X 2 X XX OPEN**

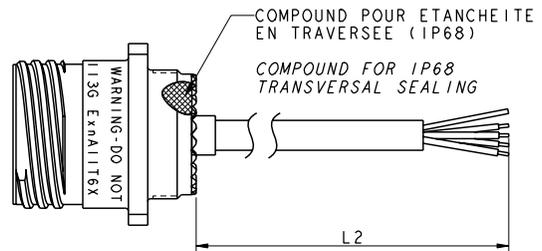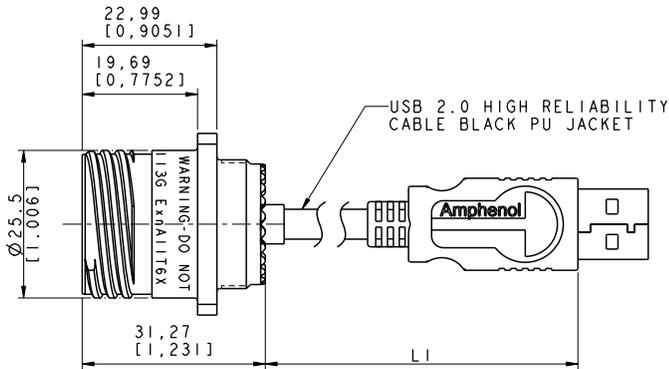

Panel drilling

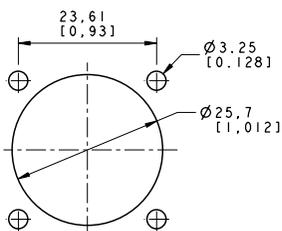

JE15 Panel Gasket

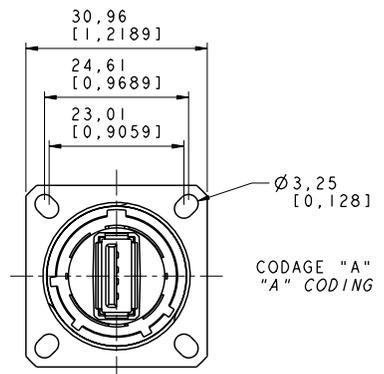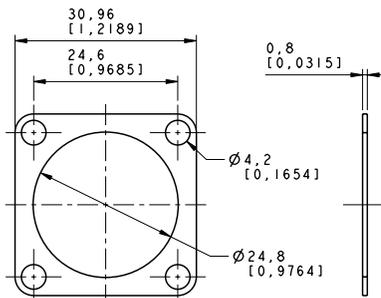

# USBFTV™ - ATEX ZONE 2








## Overall dimension

**Receptacle** - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - USB-A or Open cordset

Part number type: **USBFTVX 7S X 2 X XX A**

Part number type: **USBFTVX 7S X 2 X XX OPEN**

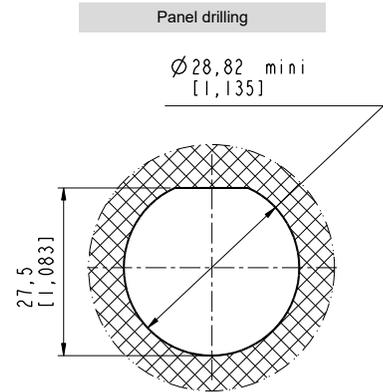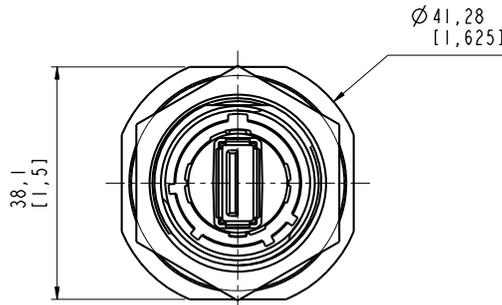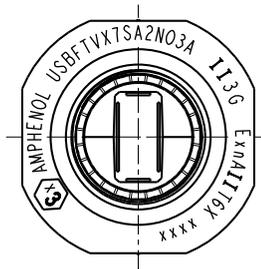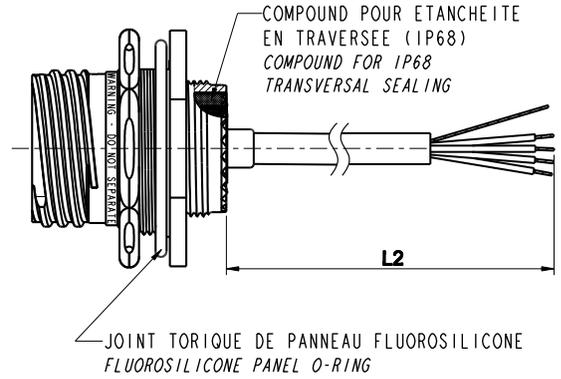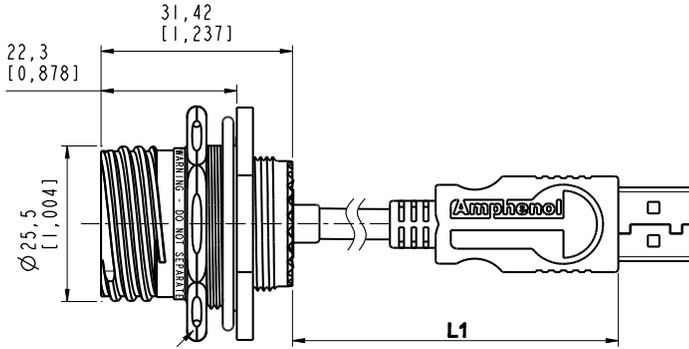

Panel drilling

USB3.2  
USB2.0  
Cables and cordsets  
Adapters and access points  
Rugged electronics  
Accessories  
Assembly instructions  
How to order

# USBBFTV



## Description

USBBFTV is a complete ruggedized solution around USB2.0 Type-B standard using a Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) to connect the two plug and receptacle parts.

This solution allows you to insert a standard USB 2.0 cordset into a metallic plug which will protect it from shocks, dust and fluids. The assembly of this ruggedized plug doesn't require any tools and can be assembled easily in the field. Perfectly adapted to the USB2.0 standard, you have two coding possibilities to facilitate coupling when you have several receptacles on a panel.

The corresponding USBBFTV receptacle dedicated to be mounted on your panel enables you to reinforce and protect your system against leakage, shocks, vibrations and much more. This receptacle part is delivered with a defined coding when ordered but can be conveniently changed with our dedicated USBF ODE tool.

## Main features

### MAIN CHARACTERISTICS

- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection
- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15
- Plug retention in the receptacle: 100N in the axis
- Mating cycles: 500 minimum

### DATA TRANSMISSION

- USB-B
- USB specification 2.0
- Data rate: up to 480 Mb/s for high speed USB

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 500 h with black zinc nickel ✓
  - 500 h with Tin-zinc plating ✓
  - 1000 h with marine bronze shell ✓
- Fire retardant / Low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06 > weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Temperature range: - 40°C / +85°C

### APPLICATIONS

- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas

✓ : RoHS compliant




**How to order :** Please refer to page 124

## Back terminations

Type 1:  
female USB-A

Type 2:  
solder 4 Tinned holes to solder your cable

View of the PCB of the Type 2 version with  
4 tinned holes for solder termination




# USBBFTV



## Overall dimension


Plug - Shell type 6

Part number type: **USBBF TV 6 X**

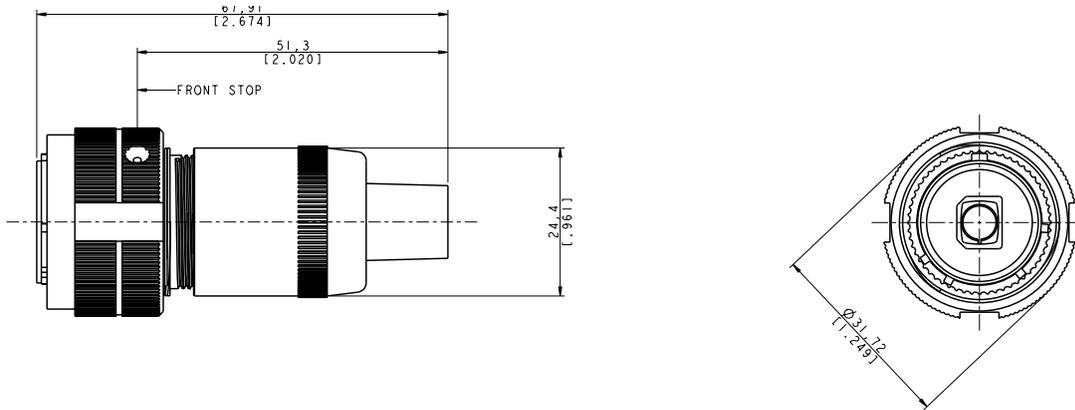


Receptacle - Square flange receptacle - 4 mounting holes - Shell type 2 - Back terminations type 1

Part number type: **USBBF TV 2 X X**

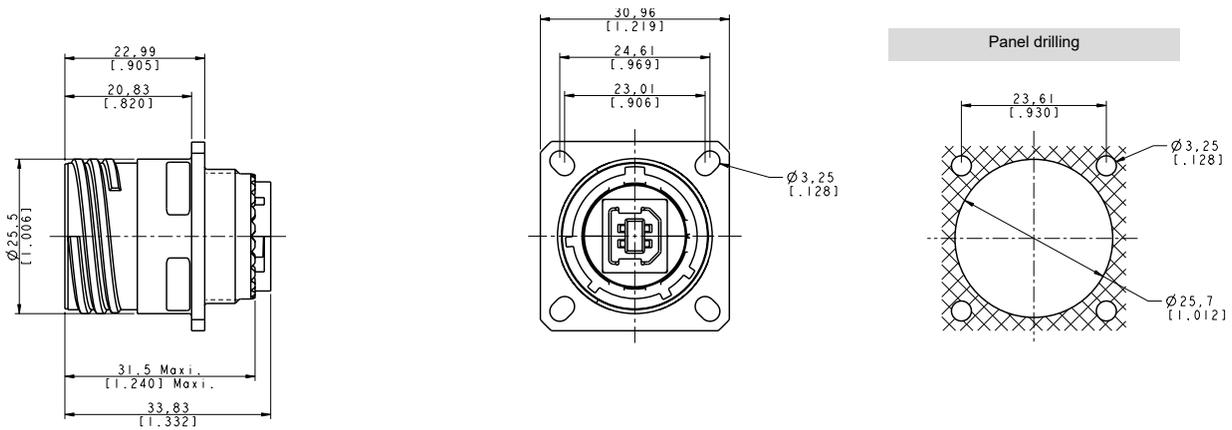

Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back terminations type 1

Part number type: **USBBF TV 7 X X**

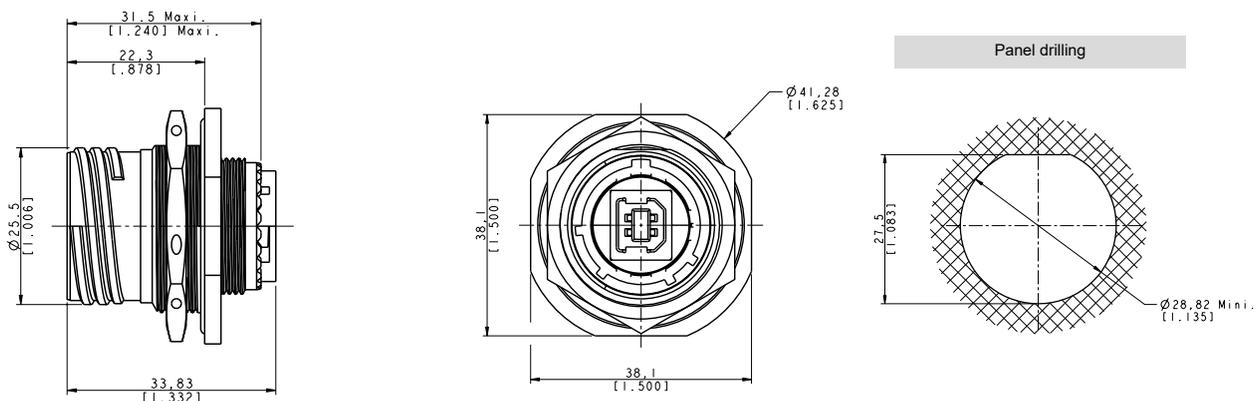


# USBBFTV



## Overall dimension


**Receptacle** - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination type 1 - Metal backshell

Part number type: **USBBF TV 2PE 1 X**

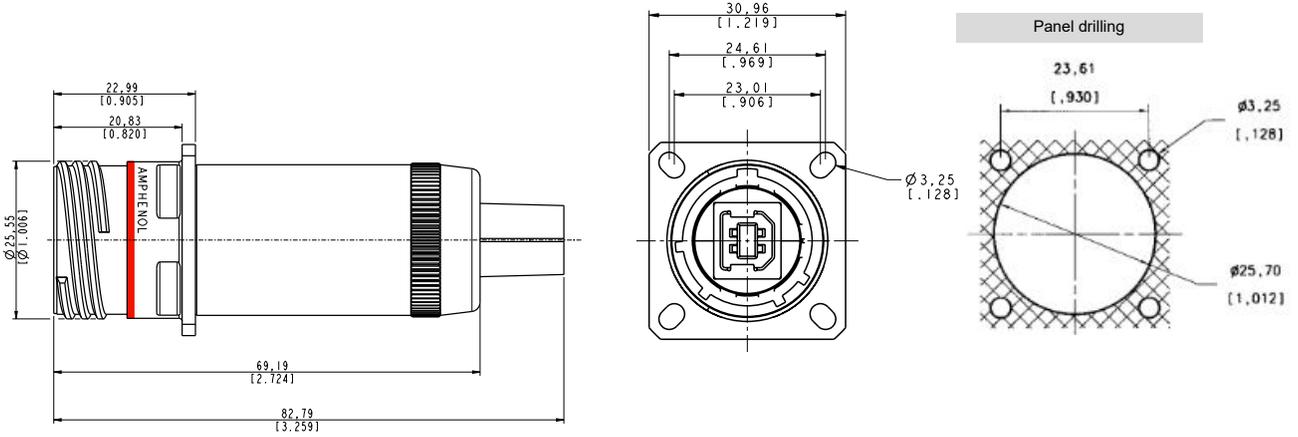


**Receptacle** - Square flange receptacle - 4 mounting holes - Shell type 2 - Back termination type 2 - Metal backshell

Part number type: **USBBF TV 2PE 2 X**

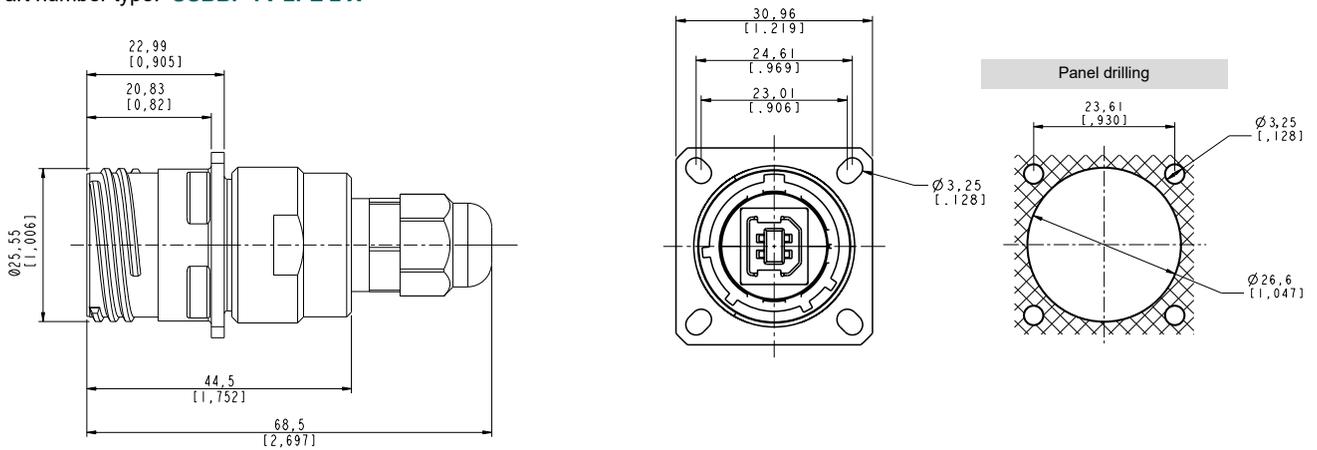

Part number type: **USBBF TV 2PEM 2 X**

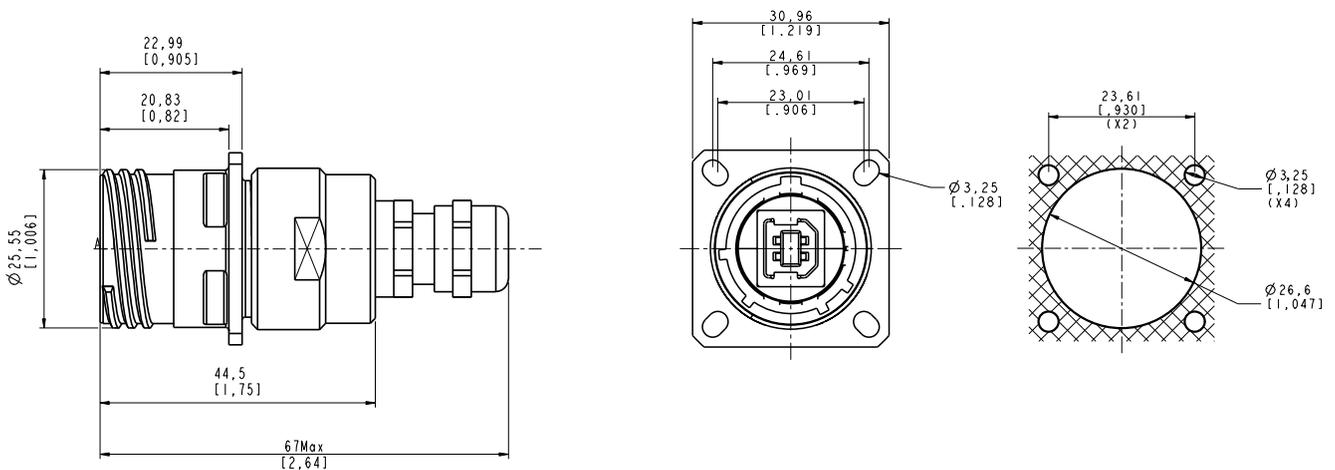


# USBBFTV



## Overall dimension


**Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination type 1 - Metal backshell**

Part number type: **USBBF TV 7PE 1 X**

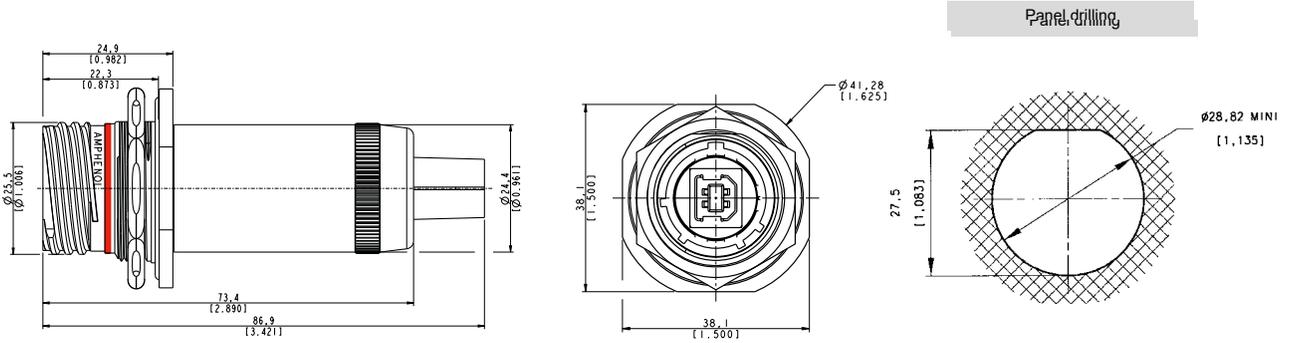


**Receptacle - Jam nut receptacle - Hexagonal nut mounting - Shell type 7 - Back termination type 2 - Metal backshell**

Part number type: **USBBF TV 7PE 2 X**

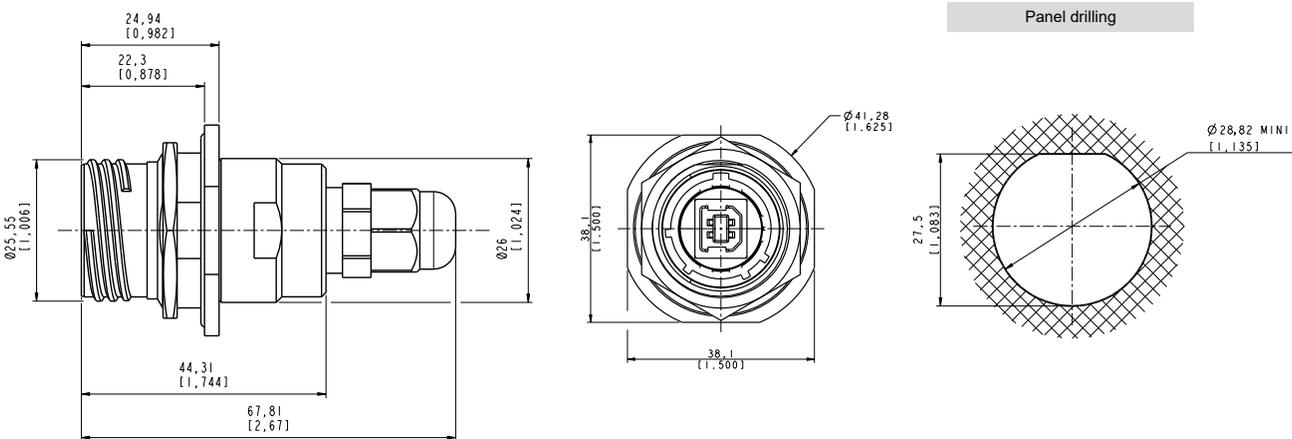

Part number type: **USBBF TV 7PEM 2 X**

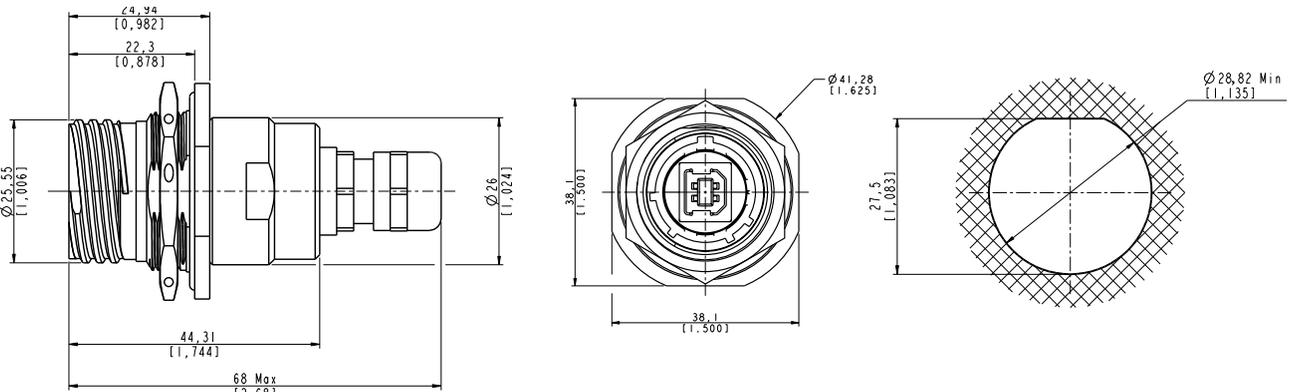

# USBFTV - TRANSVERSALLY SEALED RECEPTACLE



## Description

The transversally sealed receptacle is in all aspects equivalent to the standard and in addition, is improved with compound at the rear of the receptacle. This will prevent the sealing of the receptacle when unmated with his plug or protective cap.

The hermetic solution, as the transversally sealed one is compounded at the rear of the receptacle. Helium leakage is less than  $1.10 \cdot 10^{-6} \text{ cm}^3$  per second [0.1 micron cubit ft per hour] at one bar [15 psi] pressure differential. This test is performed on all of the hermetic receptacles.

## Main features

### MAIN CHARACTERISTICS

- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15
- 2 mechanical coding/polarization possibilities by the user (receptacle insert rotation)
- Sealed against fluids and dusts (IP68)
- Shock, vibration and traction resistant
- No cabling operation in field and no tools required
- Improved EMI protection
- USBFTV plug retention in the receptacle: 100 N in the axis
- Mating cycles: 500 minimum

### DATA TRANSMISSION

- USB-B
- USB specification 2.0
- Data rate: up to 480 Mb/s for high speed USB

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 500 h with black zinc nickel ✓
  - 500 h with Tin-zinc plating ✓
  - 1000 h with marine bronze shell ✓
- Fire retardant / Low smoke: UL94 V0 and EN45545
- Vibrations: 10 - 500 Hz, 10 g, 3 axes: no discontinuity > 1micro s
- Shocks: IK06 > weight of 250 g drop from 40 cm [15.75 in] onto connectors (mated pair)
- Temperature range: - 40°C / +85°C

### APPLICATIONS

- Battlefield communication systems
- C5ISR
- Data acquisition and transmission in harsh environment
- Navy
- Rail Mass Transit
- Industrial process control
- Robotics
- CNC machines
- Oil & Gas



✓ : RoHS compliant

**How to order :** Please refer to page 125

## Back terminations

USB cable end type A

USB cable type «OPEN»

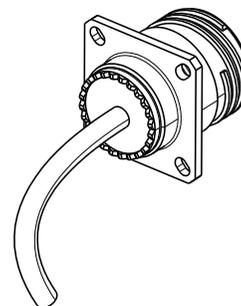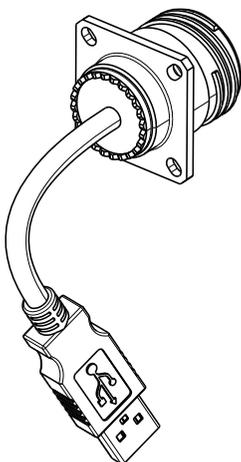




# USBBFTV - STAND OFF RECEPTACLE





## Overall dimension

Receptacle - Jam nut receptacle - Hex nut mounting - Shell type 7 - PC Tails

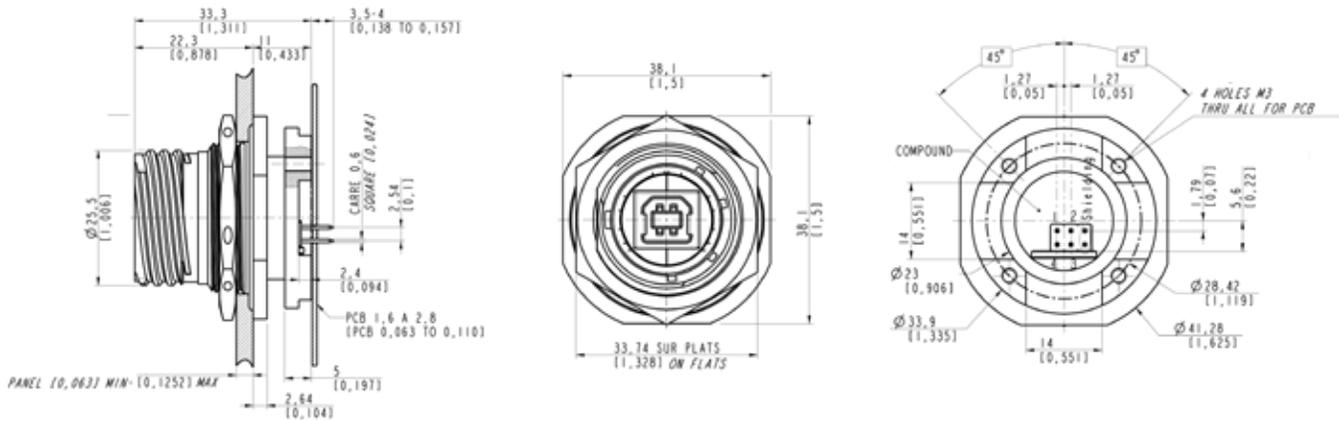

PCB Layout

Panel drilling

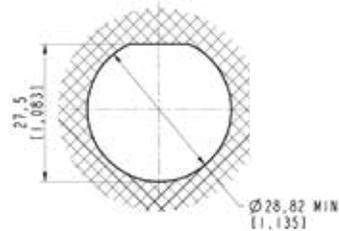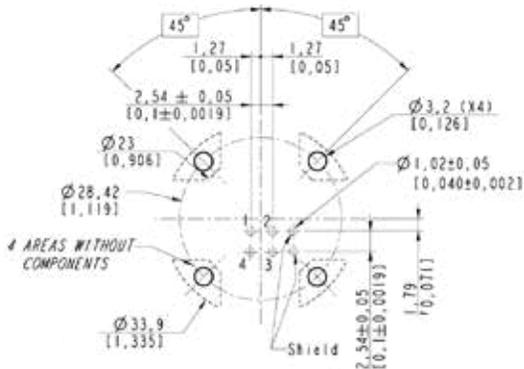

Part number

Plating

USBBF TV 7 5 N F459

Nickel ✓

USBBF TV 7 5 G F459

Olive drab cadmium

USBBF TV 7 5 ZN F459


Black Zinc Nickel ✓

✓ : RoHS compliant

# NOTES

A large area of horizontal dotted lines for taking notes.

- USB3.2
- USB2.0**
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order

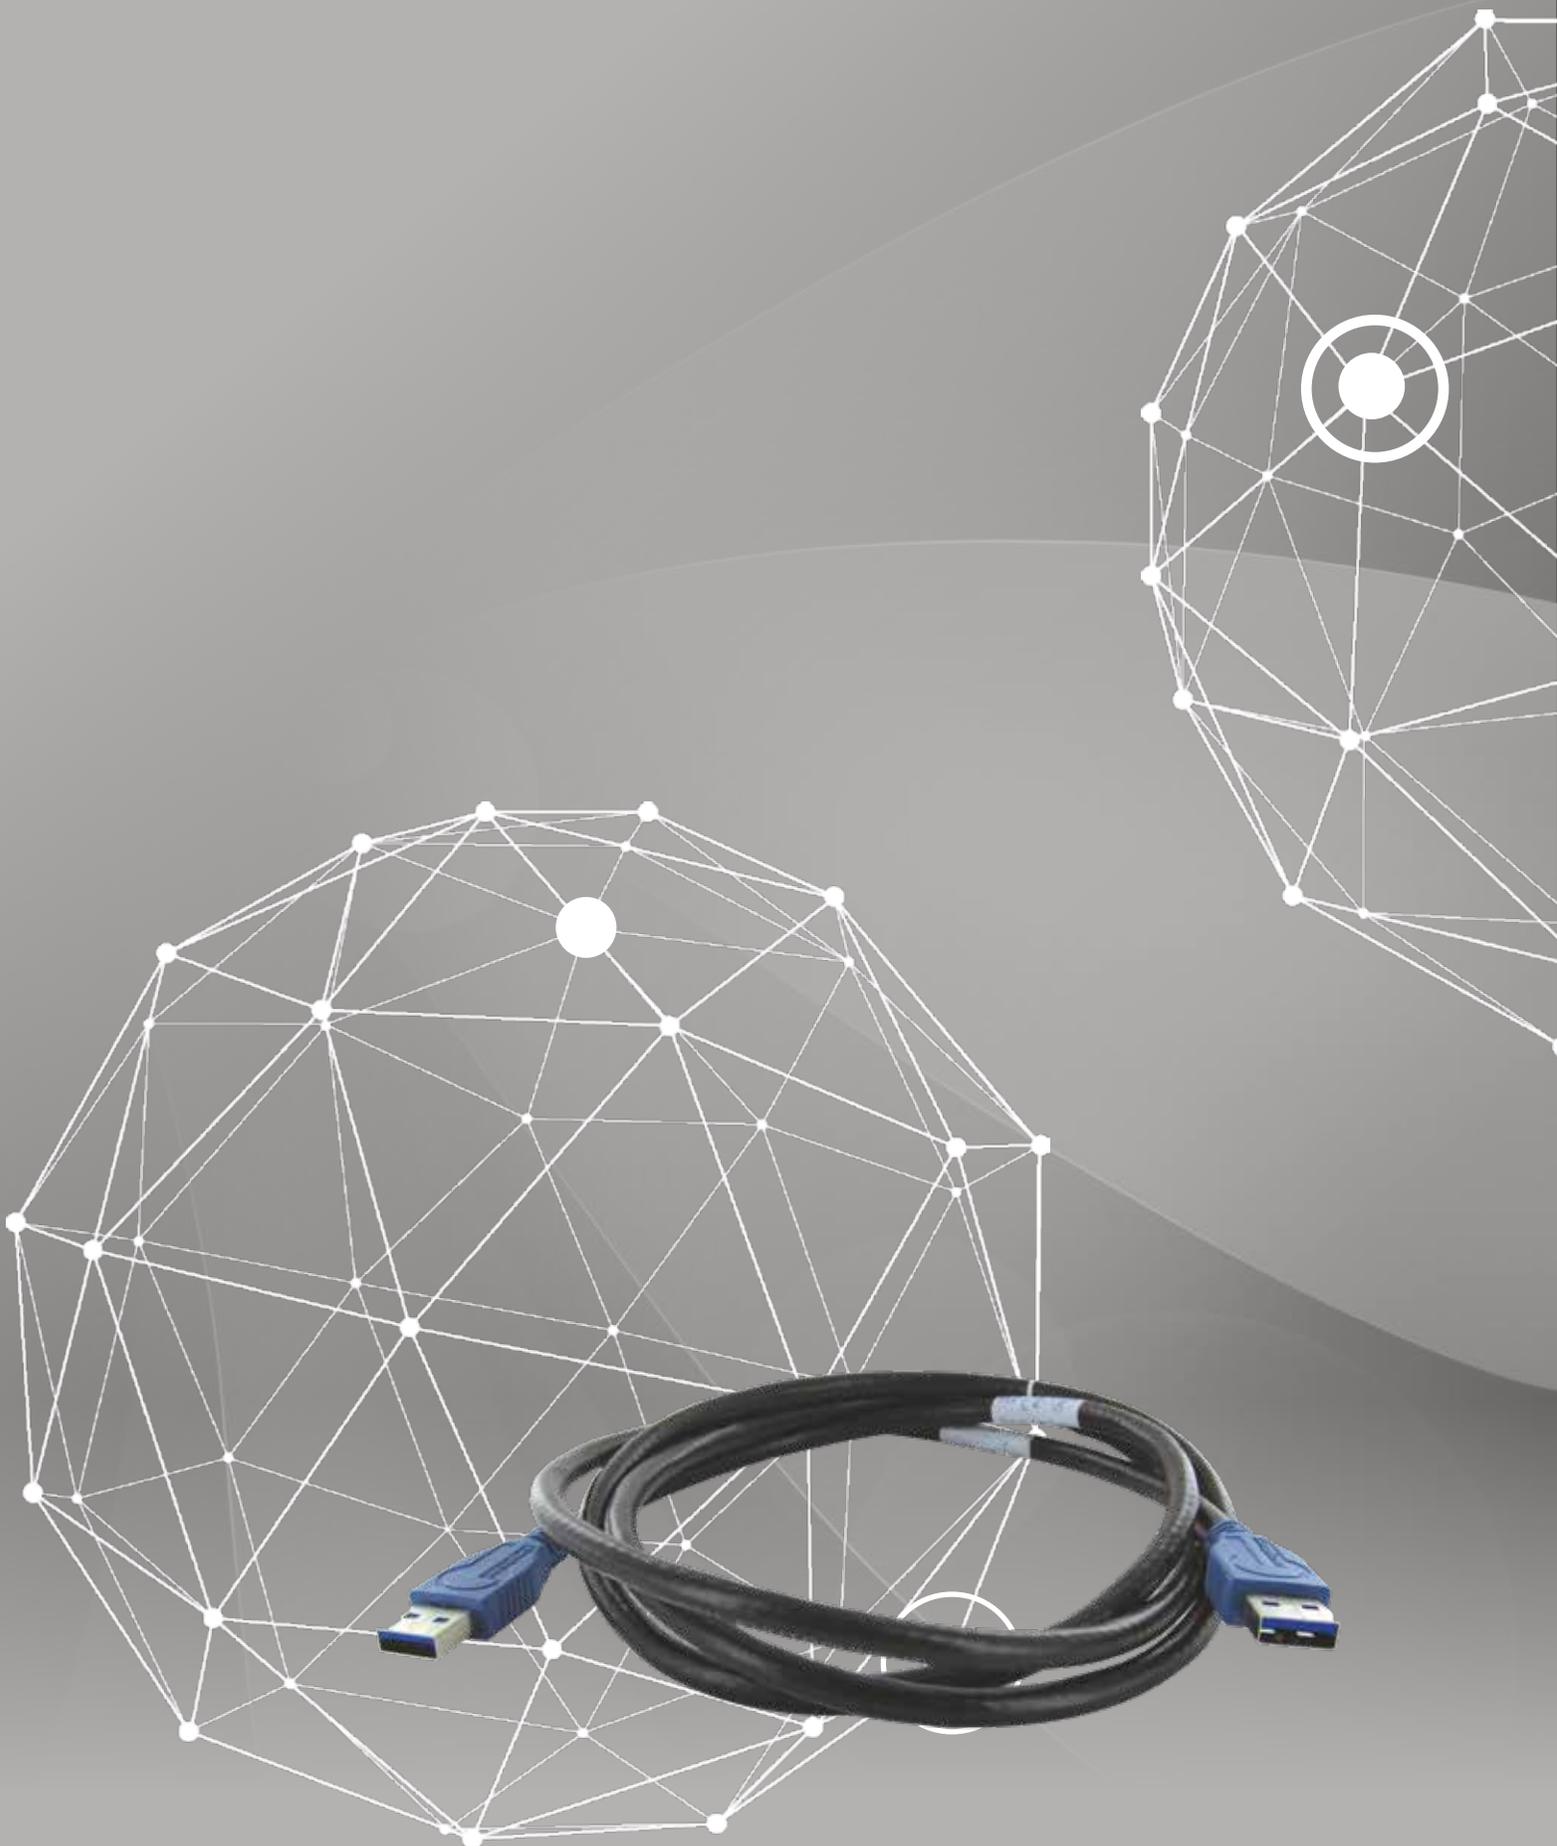

# CABLES AND CORDSETS



## Table of contents

<b>CABLES AND CORDSETS</b>	<b>69</b>
USB3.2 Gen1 cable and cordset	70
USB2.0 cable and cordset	71

USB3.2
USB2.0
<b>Cables and cordsets</b>
Adapters and access points
Rugged electronics
Accessories
Assembly instructions
How to order

# USB3.2 GEN1 CABLE AND CORDSET



## Description

This USB3.2 Gen1 cable is specifically designed for fixed or deployable military or industrial applications. Can be ordered as cordset with USB-A at both end or as reel of 300m to be used for cabling activity. Its special polyurethane can withstand the harshest environment.

## Design

USB3.2 2 X Data Pair	Conductors	2 x 28 AWG Stranded tinned copper wire (Ø0,39mm)
	Insulation	Polyethylene (Ø1,0mm)
	Colors	Pair 1: Purple and orange Pair 2: Blue and yellow
	Drain	2 x 28 AWG Stranded tinned copper drain wire (Ø0,39mm)
	Shield	Aluminate foil and plastic tape overlapped
USB2.0 1 X Data Pair	Conductors	2 x 28 AWG Stranded tinned copper wire (Ø0,39mm)
	Insulation	Polyethylene (Ø0,73mm)
	Colors	Green and White
Power 1 X Power Pair	Conductors	2 x 24 AWG Stranded tinned copper wire (Ø0,6mm)
	Insulation	Polyethylene (Ø1,1mm)
	Colors	Red and Black
Overall		Fillers, Aluminate foil overlapped and 36 AWG shield braiding of tinned copper wires
Jacket	Insulation	Polyurethane (Ø5,7±0,2mm)
	Color	Black

## Electrical characteristics at 20°C


USB3.2 Gen1 2 X Data Pair	Test voltage	500 V		
	Impedance	90±7% Ohm		
	Attenuation (dB/100m)	625 MHz - 10	5 000 MHz - 36	
		1 250 MHz - 15	7 500 MHz - 47	
		2 500 MHz - 25		
Outer screen resistance	≤ 15 Ohm/km			
USB2.0 1 X Data Pair	Test voltage	500 V		
	Impedance	90±15% Ohm		
	Attenuation (dB/100m)	1 MHz - 4,0	48 MHz - 27,0	
		4 MHz - 7,8	96 MHz - 38,0	
		8 MHz - 11,4	200 MHz - 64,0	
12 MHz - 13,4		400 MHz - 116,0		
24 MHz - 19,0				
Power Wire	Conductor resistance	≤ 85 Ohm/km		
	Insulation resistance	≥ 200 MOhm*km		
	Operating voltage	≤ 1 000 V		
	Test voltage	500 V		

## Other characteristics

Halogen Free Flame Retardant	Resistance to microbial/fungus growth: MIL-STD-810G, method 508.6 = grade 1-2
Oil resistance acc. to 1584, sec. 480 (60°)	Min. bending radius allowed: repeated 10 X Ø single 5 X Ø
Flame retardant acc. to UL 1581, sec. 1090 (H)	Permissible temperature range for transport, installation and operating: -40°C up to 85°C
Flame retardant acc. to IEC 60332-1-2	
RoHS compliant (Directive 2011/65/EC)	Weight: 46 kg/km

**How to order :** Please refer from page 126

# USB2.0 CABLE AND CORDSET



## Description

This USB2.0 cable has been specially selected for fixed or portable military or industrial applications. Can be ordered as cordset with USB-A at both end or as reel of 300m to be used for cabling activity. Its special polyurethane can withstand the harshest environment.

## Design

USB2.0 1 X Data Pair	Conductors	2 x 28 AWG Stranded tinned copper wire (Ø0,39mm)
	Insulation	Polyethylene (Ø0,9mm)
	Colors	Green and White
Power 1 X Power Pair	Conductors	2 x 24 AWG Stranded tinned copper wire (Ø0,58mm)
	Insulation	Polyethylene (Ø1,1mm)
	Colors	Red and Black
Drain Wire	Conductor	26 AWG Stranded tinned copper drain wire
Overall		Aluminate foil overlapped and shield braiding of tinned copper wires (16 x 5 x 0,1)
Jacket	Insulation	UV resistant polyurethane (Ø5,1±0,2mm)
	Color	Black

## Electrical characteristics at 20°C

USB2.0 1 X Data Pair	Test voltage	1000 V	
	Attenuation (dB/100m)	1 MHz - 4,0	48 MHz - 19,8
		4 MHz - 5,5	96 MHz - 28,6
		8 MHz - 8,2	200 MHz - 39,2
		12 MHz - 9,9	400 MHz - 56,5
24 MHz - 14,1			
Power Wire	Conductor resistance	≤ 90 Ohm/km	
	Insulation resistance	≥ 20 MOhm*km	
	Operating voltage	≤ 100 V	
	Test voltage	1000 V	

## Other characteristics

Halogen Free Flame Retardant	Resistance to microbial/fungus growth: MIL-STD-810G, method 508.6 = grade 1-2
Oil resistance acc. to 1584, sec. 480 (60°)	Min. bending radius allowed: repeated 10 X Ø single 5 X Ø
Flame retardant acc. to UL 1581, sec. 1090 (H)	Permissible temperature range for transport, installation and operating: -40°C up to 85°C
Flame retardant acc. to IEC 60332-1-2	
RoHS compliant (Directive 2011/65/EC)	Weight: 46 kg/km

**How to order :** Please refer from page 127



# ADAPTORS AND ACCESS POINTS



## Table of contents

<b>ADAPTORS AND ACCESS POINTS</b>	<b>73</b>
Composite USB3.2 Gen 1 access point	74
USB3.2 Gen1 and USB2.0 access point	77
Composite USB2.0 access point	79
USB2.0 to type EN3646 - PT/451 - ABS1547 adaptor	84

USB3.2
USB2.0
Cables and cordsets
<b>Adaptors and access points</b>
Rugged electronics
Accessories
Assembly instructions
How to order

# COMPOSITE USB3.2 GEN1 ACCESS POINT



## Description

The rugged USB3.2 Gen1 plastic access point is a rugged USB access point solution designed to be used in any industrial harsh environments.

The Self Closing Cap enclosure protects the USB-A receptacle from splash and dust when the plug or the USB Memory key is unmated.

## Main features

### MAIN CHARACTERISTICS

- Data transmission: USB specification **3.2 Gen 1**
- Data rate: up to **5GB/s** for high speed USB
- **USB-A interface**
- **USB2.0 backward compatible**

### ENVIRONMENTAL PROTECTION

- Sealing level: IP54 when not mated
- Temperature range: - 40°C / + 85°C
- RoHS compliant

### APPLICATIONS




- Access point
- Telecom equipments
- Video control
- Robotics
- Industrial process control
- CNC machines
- Special machines

**How to order :** Please refer to page 128


## Overall dimension

**Square flange receptacle – Shell type 2 - 4 mounting holes**

Part number type: **USB3APSCC 2 1**

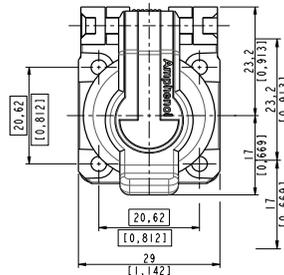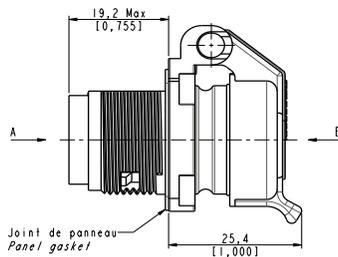

### Panel Drilling

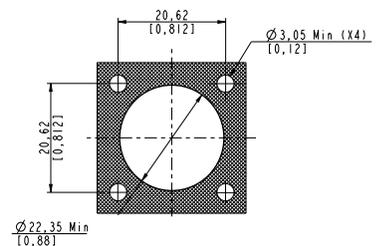




# COMPOSITE USB3.2 GEN1 ACCESS POINT

## Overall dimension

Square flange receptacle – Shell type 2 - With cordset - 4 mounting holes


Part number type: **USB3APSCC 2 2 XX A**

**X:** see the How to order to complete your part number

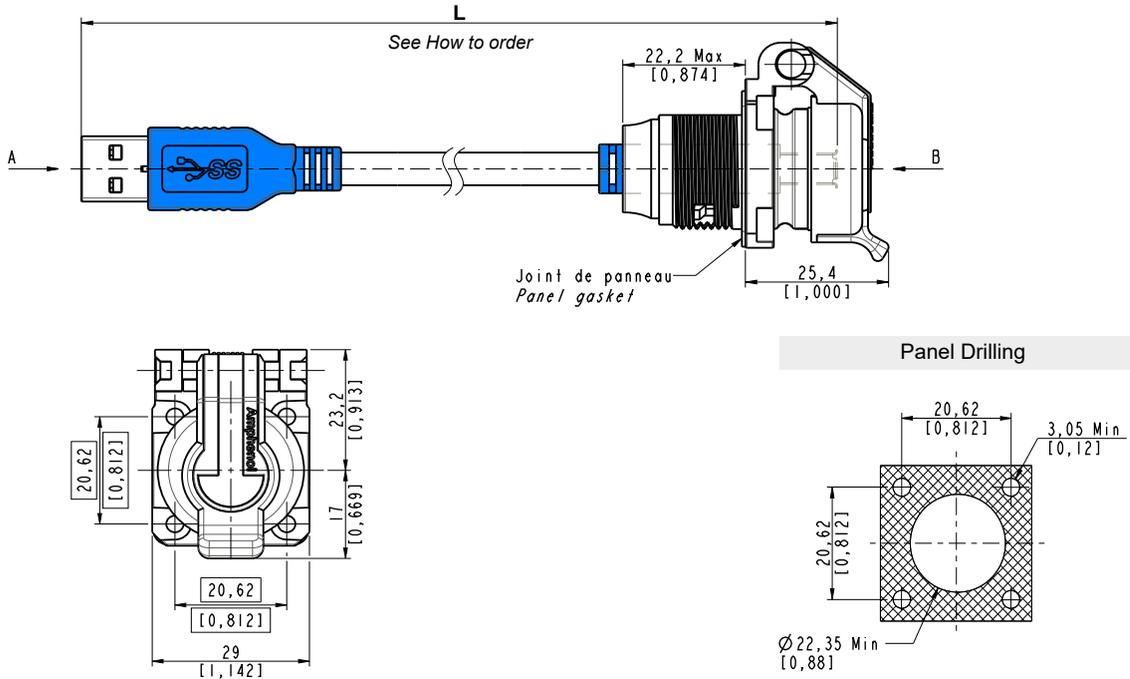

Jam nut receptacle – Shell type 7

Part number type: **USB3APSCC 7 1**

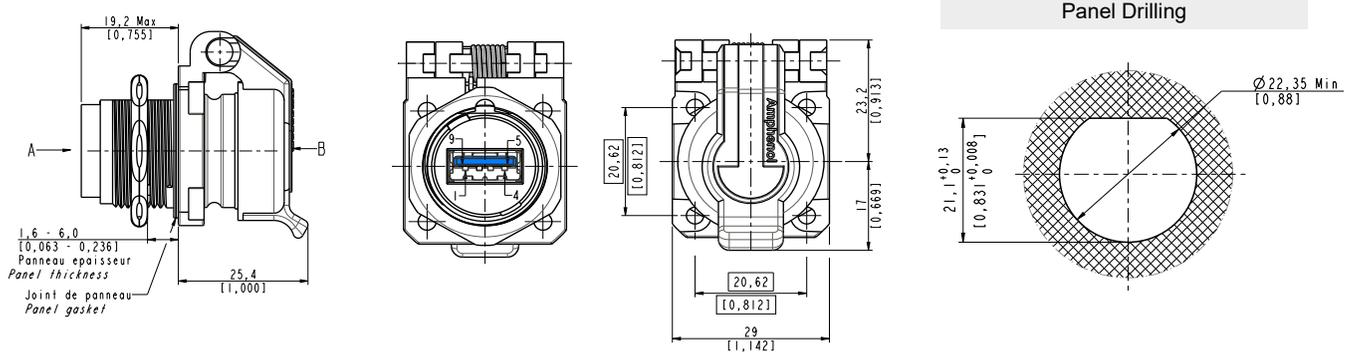

# COMPOSITE USB3.2 GEN1 ACCESS POINT




## Overall dimension

Jam nut receptacle – Shell type 7 - With cordset

Part number type: **USB3APSCC 7 2 XX A**

**X:** see the How to order to complete your part number

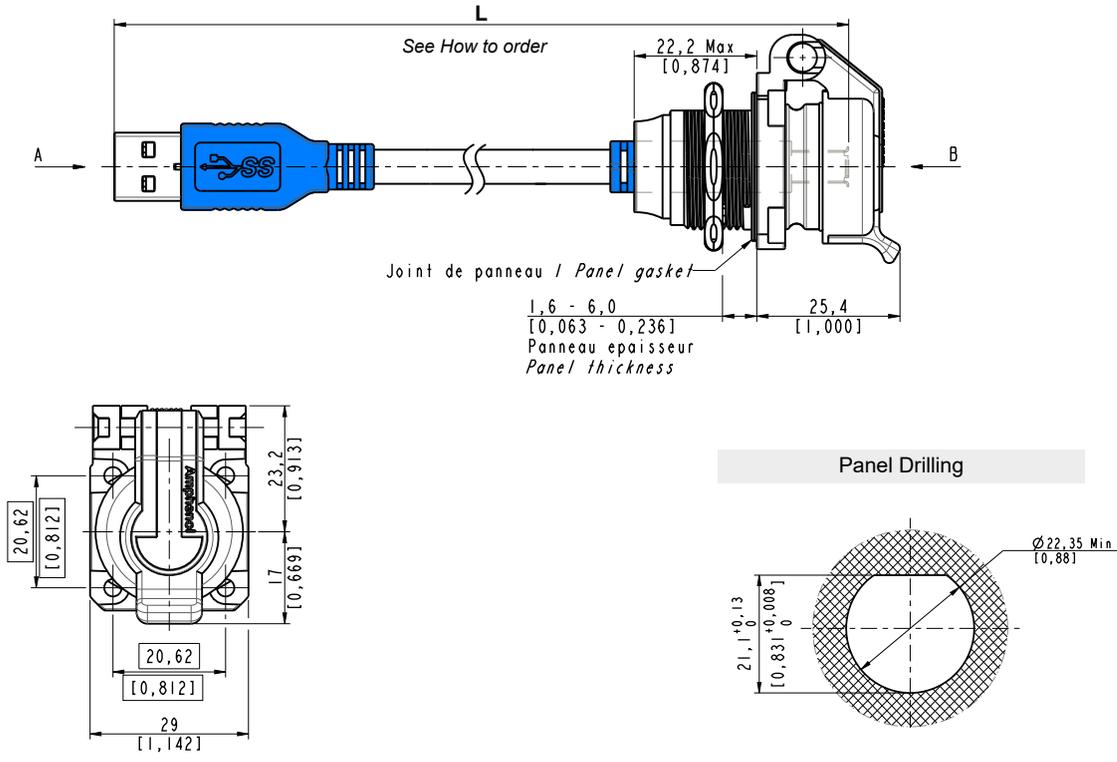

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order



# USB3.2 GEN1 AND USB2.0 ACCESS POINT

## Description

This USB receptacle is perfectly suitable for access point applications to connect a standard USB key or a USB cable. These receptacles are available on USB3.2 Gen1 - Type A and USB2.0 - Type A or B.

The square flange receptacle is a derivate from MIL-DTL-26482 series size 18. The included composite self-closing cap protects your receptacle against splash and dust.

## Main features

### MAIN CHARACTERISTICS

- Sealing level: IP54 when not mated
- Temperature range: -40°C / +85°C
- RoHS compliant

### DATA TRANSMISSION


- UBS-A
- USB specification 3.2 Gen1
- Data rate: up to 5 Gb/s for high speed USB
- USB specification 2.0
- Data rate: up to 480 Mb/s for high speed USB

### APPLICATIONS

- Access point
- Telecom equipments
- Video control
- Robotics
- Industrial process control
- CNC machines
- Special machines

## Overall dimension

### USB3.2 Gen1 access point - With self-closing cap

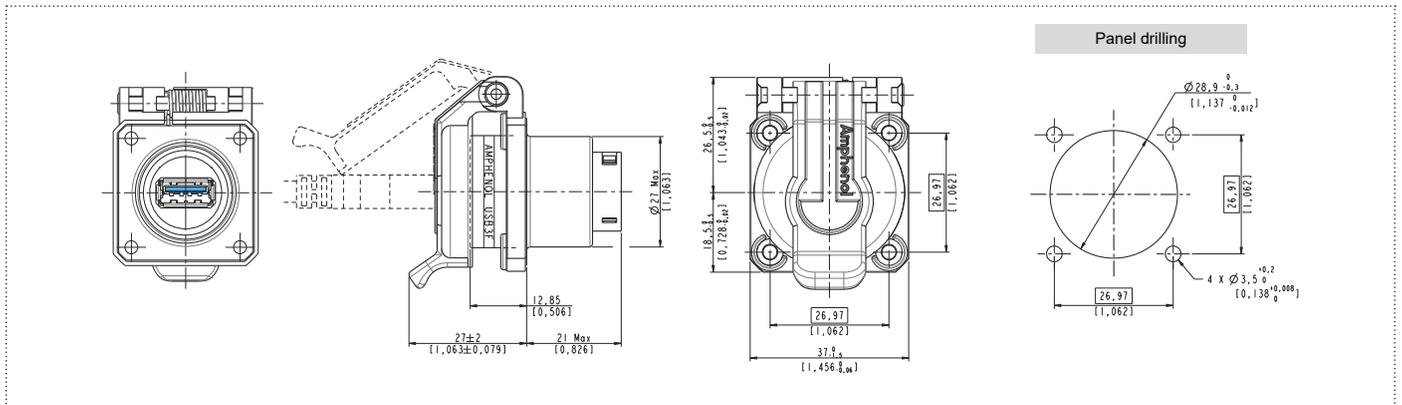

### Important note:

- The part number included the receptacle and the self-closing cap.
- This version is with USB-A in front and back termination.

Part number	Plating	Metallized inserts (EMI)
<b>USB3 F 2 B SCC</b>	Black coated ✓	No
<b>USB3 F 2 N SCC</b>	Nickel plated ✓	Yes
<b>USB3 F 2 G SCC</b>	Olive drab cadmium plated	Yes
<b>USB3 F 2 ZN SCC</b>	Black Zinc Nickel ✓	No


✓ : RoHS compliant



# USB3.2 GEN1 AND USB2.0 ACCESS POINT

## Overall dimension

### USB2.0 access point - With self-closing cap

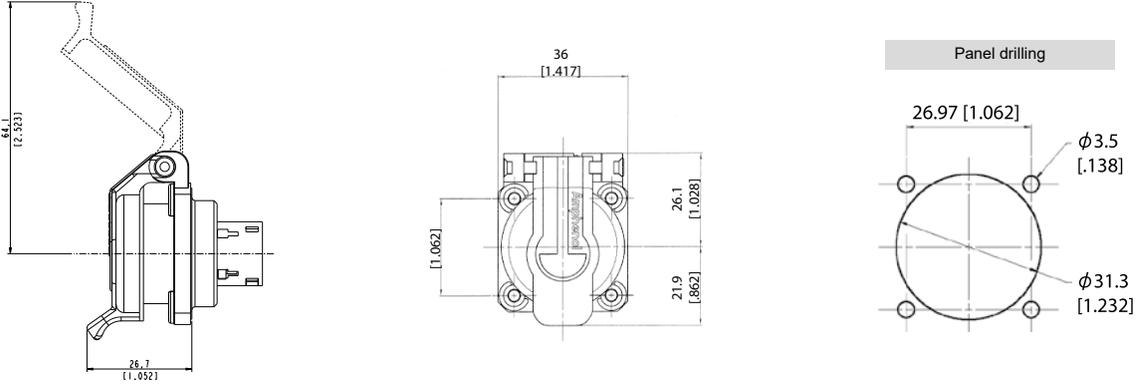


**Important note:**

- The part number included the receptacle and the self-closing cap.
- This version is with USB-B in front and USB-A in back termination.

Part number	Plating	Metallized inserts (EMI)
<b>USB F 2 1 B SCC</b>	Black coated ✓	No (blank insert)
<b>USB F 2 1 N SCC</b>	Nickel plated ✓	Yes
<b>USB F 2 1 G SCC</b>	Olive drab cadmium plated	Yes
<b>USB F 2 1 ZN SCC</b>	Black zinc nickel ✓	No

### USB B access point - With self-closing cap

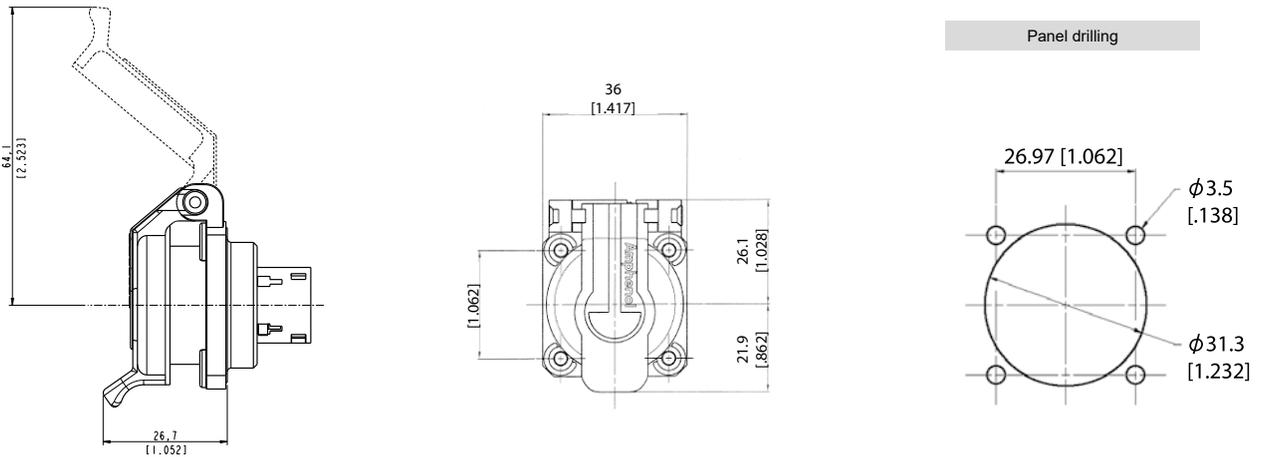

**Important note:**

- The part number included the receptacle and the self-closing cap.
- This version is with USB-B in front and USB-A in back termination.

Part number	Plating	Metallized inserts (EMI)
<b>USB B F 2 1 B SCC</b>	Black coated ✓	No (blank insert)
<b>USB B F 2 1 N SCC</b>	Nickel plated ✓	Yes
<b>USB B F 2 1 G SCC</b>	Olive drab cadmium plated	Yes
<b>USB B F 2 1 ZN SCC</b>	Black Zinc Nickel ✓	No

✓: RoHS compliant

# COMPOSITE USB2.0 ACCESS POINT



## Description

The rugged USB plastic access point is a rugged USB access point solution designed to be used in any industrial harsh environments.

The Self Closing Cap enclosure protects the USB-A Field receptacle from splash and dust when the plug or the USB Memory key is unmated.

## Main features

### MAIN CHARACTERISTICS

- Data transmission: USB specification 2.0
- Data rate: up to 480 Mb/s for high speed USB
- UBS-A
- Sealing level: IP54 when not mated
- Temperature range: -40°C / +85°C
- RoHS compliant


### APPLICATIONS

- Access point
- Telecom equipments
- Video control
- Robotics
- Industrial process control
- CNC machines
- Special machines

## Overall dimension

### Square flange access point

Part number : **USB AP SCC 21**

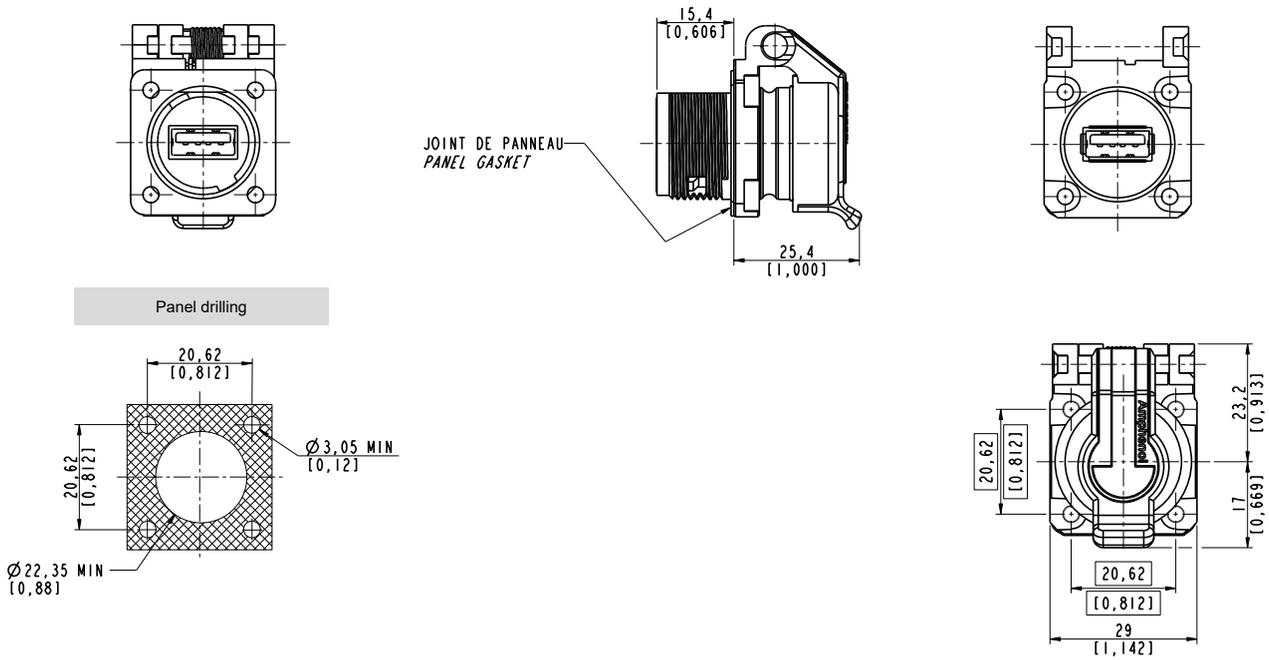


- USB3.2
- USB2.0
- Cables and cordsets
- Adaptors and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order

# COMPOSITE USB2.0 ACCESS POINT



## Overall dimension

### Square flange access point - USB-A cordset

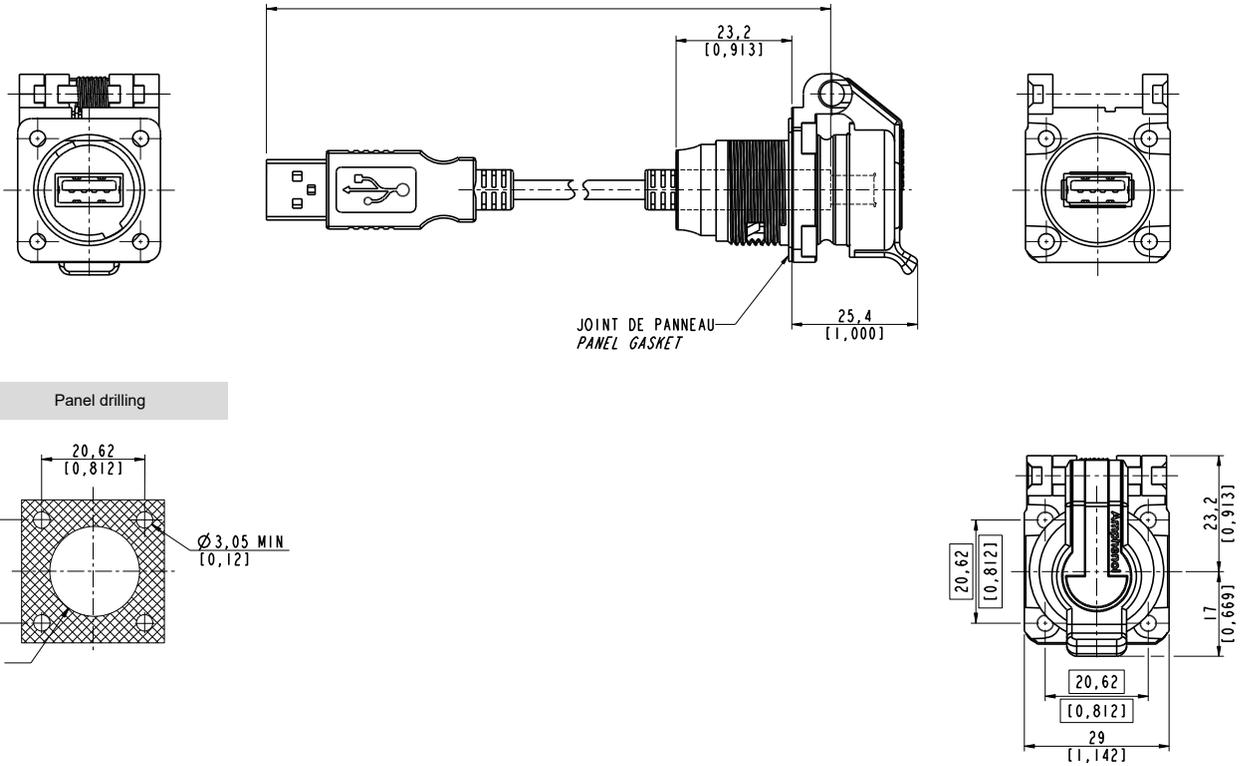

Part number	Cordset length (Meters)	Cordset length (Feet)
<b>USB AP SCC 22 02 A</b>	0.2	0.66
<b>USB AP SCC 22 03 A</b>	0.3	0.98
<b>USB AP SCC 22 05 A</b>	0.5	1.65
<b>USB AP SCC 22 10 A</b>	1.0	3.28


# COMPOSITE USB2.0 ACCESS POINT




## Overall dimension

### Jam nut access point

Part number : **USB AP SCC 7 1**

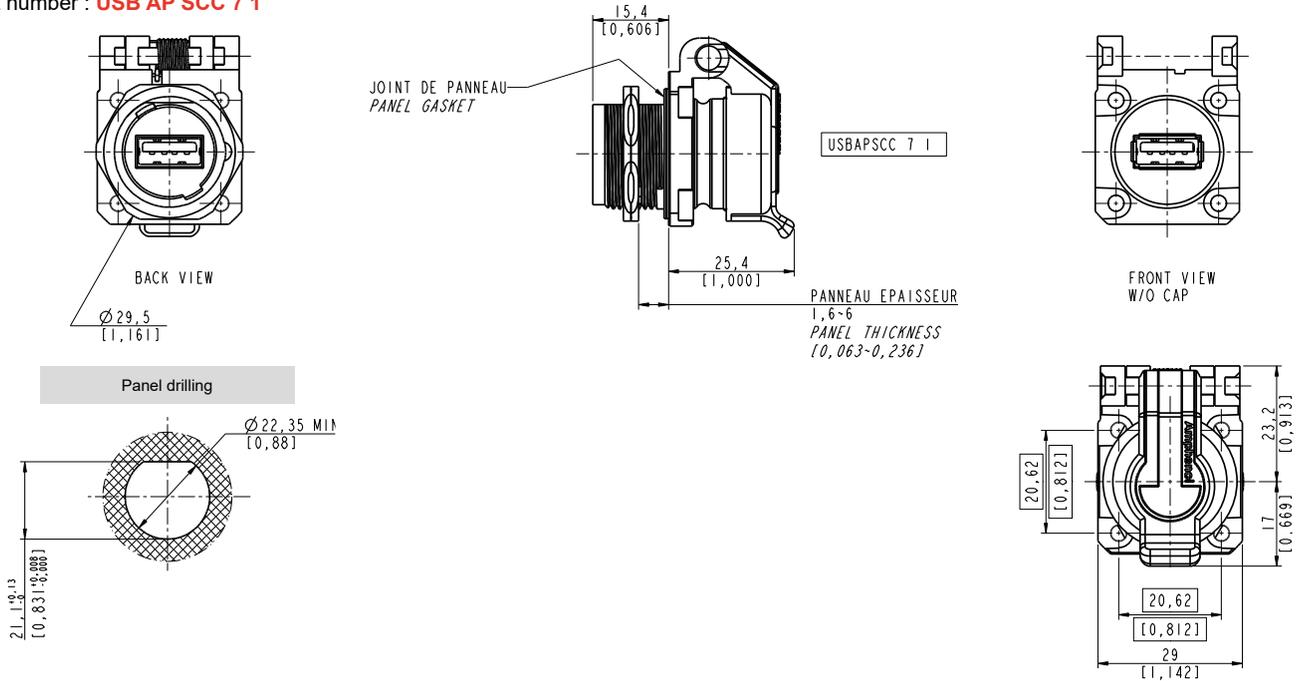

### Jam nut access point - USB-A cordset

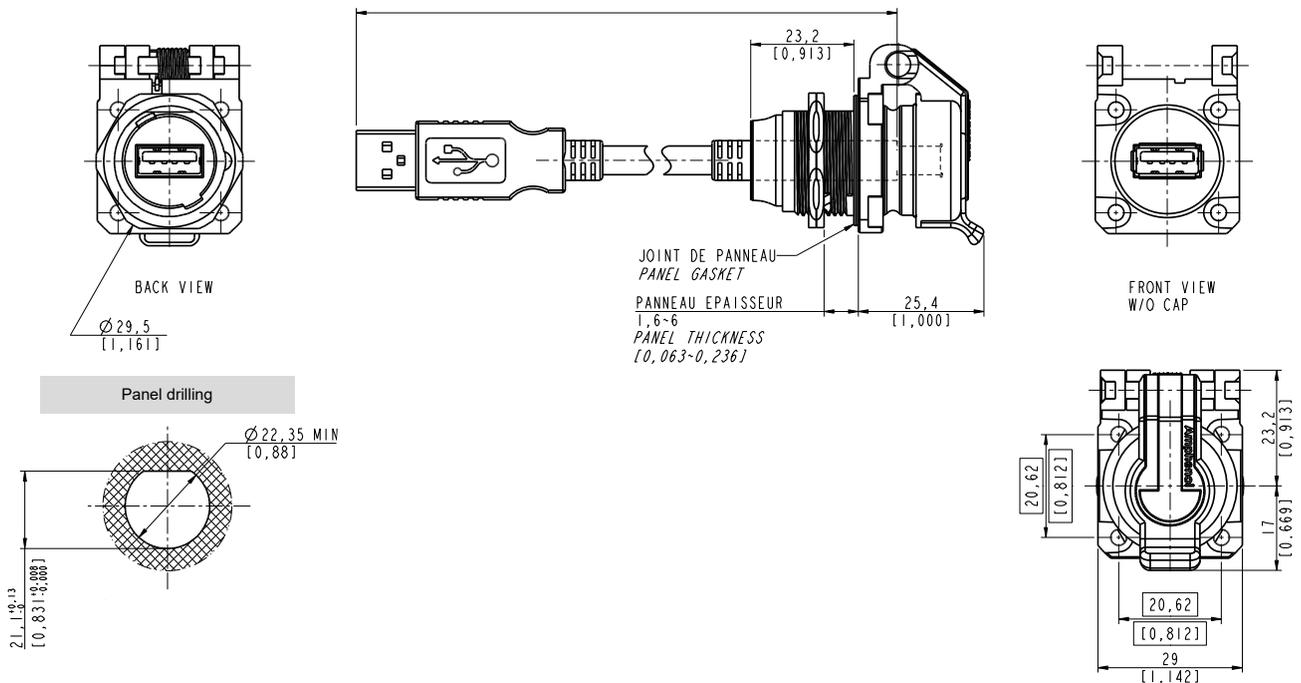

Part number	Cordset length (Meters)	Cordset length (Feet)
<b>USB AP SCC 7 2 02 A</b>	0.2	0.66
<b>USB AP SCC 7 2 03 A</b>	0.3	0.98
<b>USB AP SCC 7 2 05 A</b>	0.5	1.65
<b>USB AP SCC 7 2 10 A</b>	1.0	3.28

Due to technical modifications, all information provided is subject to change without prior notice  
Designed by Amphenol Socapex


# COMPOSITE USB2.0 ACCESS POINT




## Overall dimension

### USB-A receptacle and plug

Part number : **USB AF 7**






Panel drilling



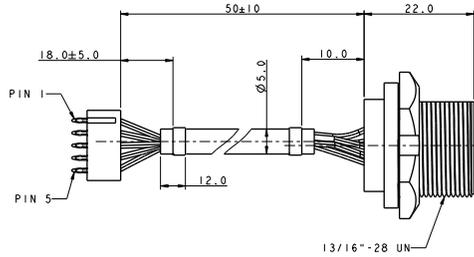


PCB layout

Pin assignments



Part number type: **USB AF 6A XXX**

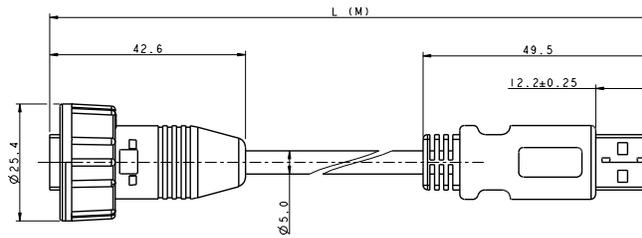

Part number	Cordset length (Meters)	Cordset length (Feet)
<b>USB AF 6A 200</b>	2.0	3.28
<b>USB AF 6A 500</b>	5.0	16.40



# COMPOSITE USB2.0 ACCESS POINT





## Overall dimension

### USB Mini B receptacle and plug


Part number : **USB MINI BF 7 PCB**

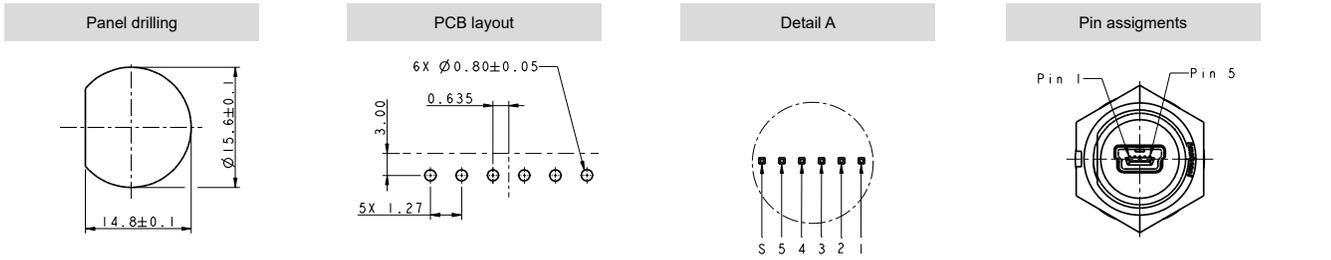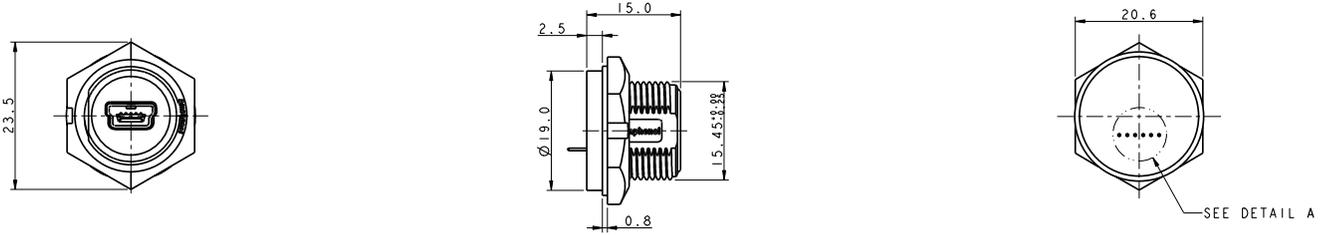

Part number : **USB MINI BF 7 PCB 90**

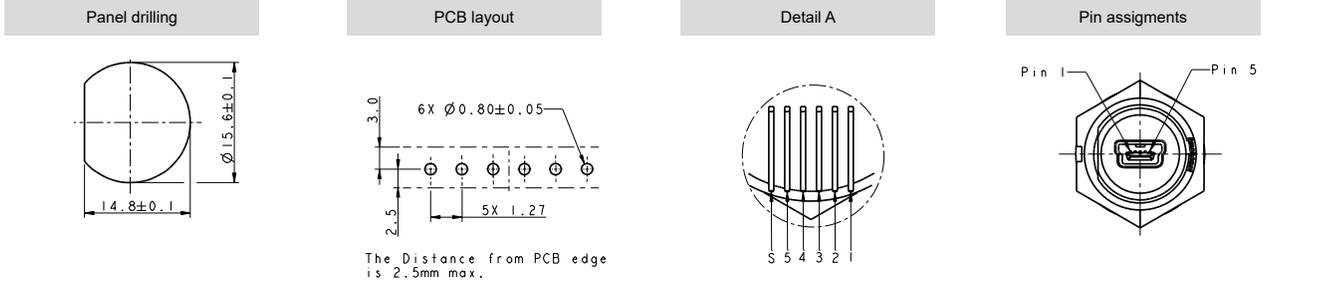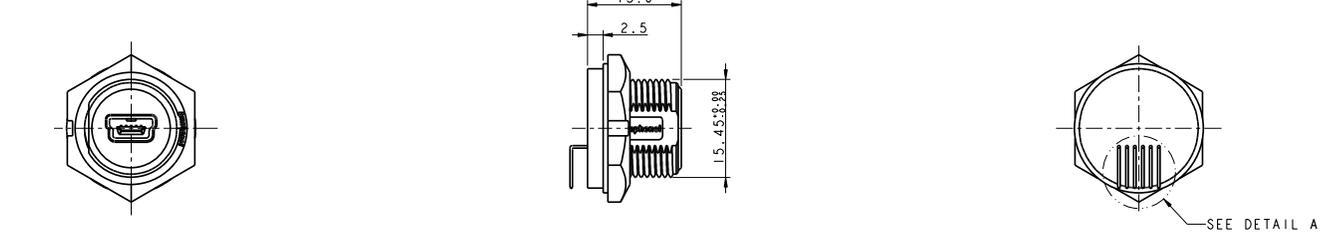

Part number type: **USB MINI BF 6 XXX OPEN**

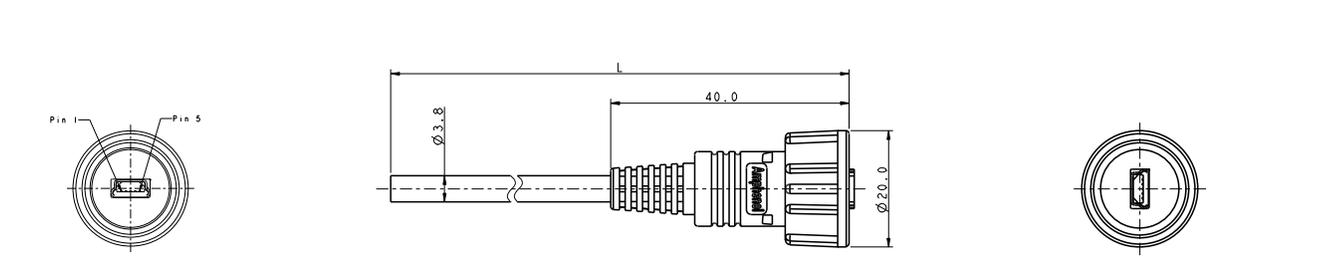

Part number	Cordset length (Meters)	Cordset length (Feet)
<b>USB MINI BF 6 200 OPEN</b>	2.0	3.28
<b>USB MINI BF 6 500 OPEN</b>	5.0	16.40




# USB2.0 TO TYPE EN3646 - PT/451 - ABS1547 ADAPTOR

## Description

This special USB adaptor is the easiest way to connect your EN3646 and PT/451 connector to a USB 2.0 - Type A. Connector. The arrangement of this connector is 10-6 as below. If you want to use this adaptor as an access point, you can include a composite self-closing cap to protect your receptacle against splash and dust. This adaptor is qualified ABS1547.

## Overall dimension

USB adaptor to EN3646 - PT/451 with 10-6 arrangement - With or without self-closing cap

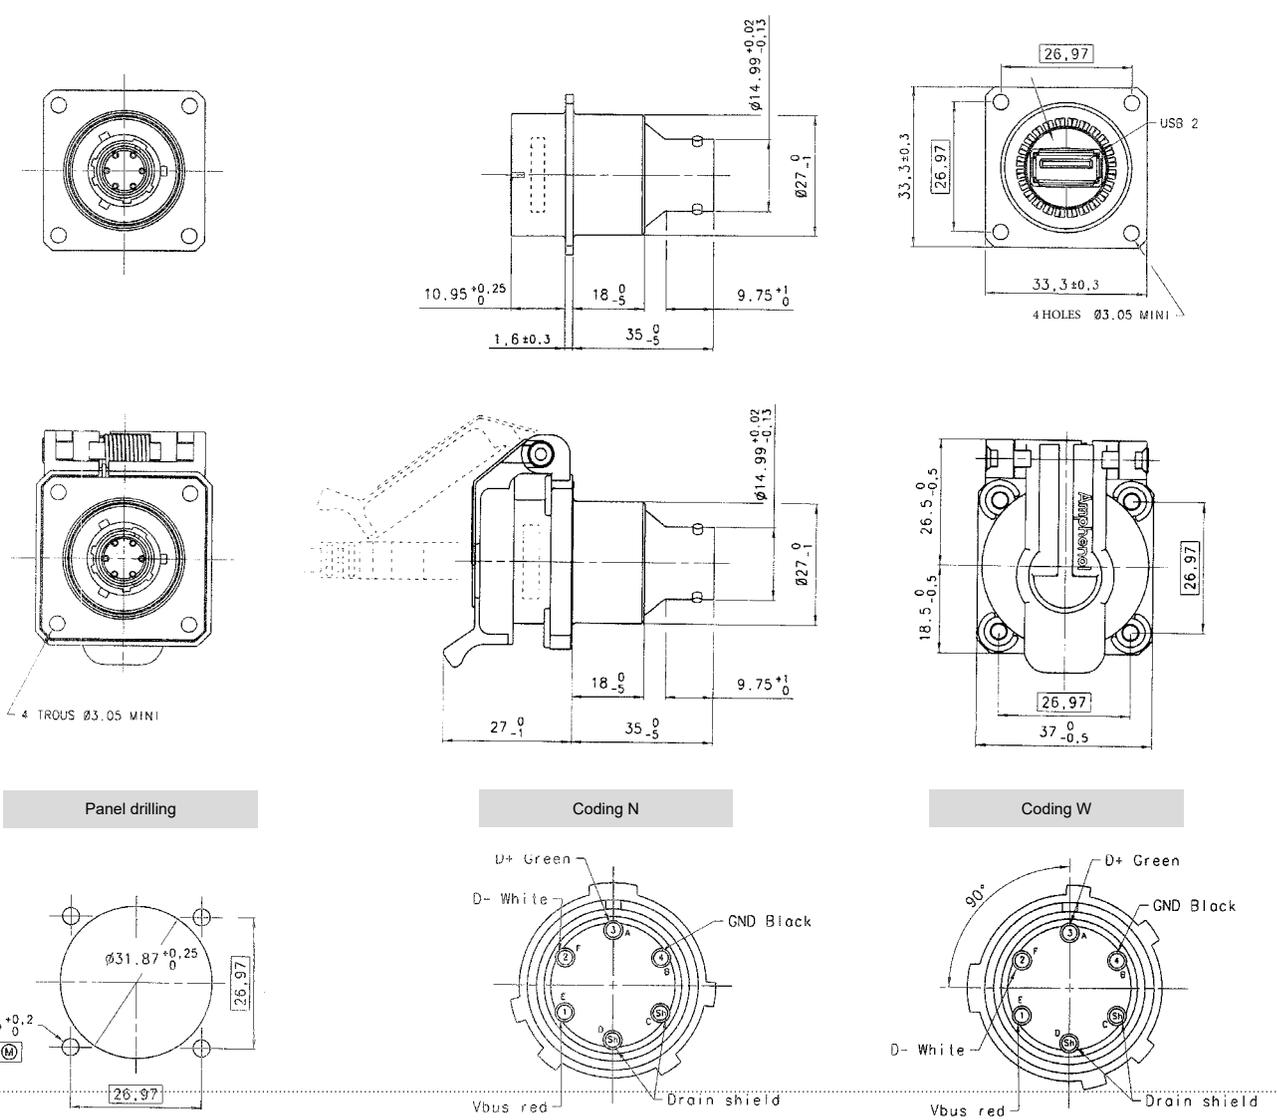

Part number	ABS1547 part number	Plating	Coding	Self-closing cap
35608N	ABS1547-003A02N	Black anodized ✓	N	No
35615W	ABS1547-003A02W		W	
35616N	ABS1547-003A03N		N	Yes
35617	ABS1547-003A03W		W	

✓ : RoHS compliant



# RUGGED ELECTRONICS



USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

## Table of contents

<b>RUGGED ELECTRONICS</b>	<b>86</b>
USB3CFTV Memory key	87
USB3FTV™ Memory key	88
USB3FTV™ Memory key high capacity	89
ROK - Rugged Oval Key	91
USB3FTV™ - USB3.2 Gen 1 amplifier	92
USBFTV™ - USB2.0 amplifier	95

# USB3CFTV™ MEMORY KEY



## Description

USB3.2 Gen1 Type C reinforced memory keys allows you to carry sensitive information in total security in harsh military, avionics/airframe or industrial environment. Its design, based on MIL-DTL-38999 series III can only be mated to our USB3CF TV receptacles and is available, as standard, in capacities from 16 to 256Gb.

Electronics used in our reinforced USB keys are from the latest generation, using TLC 3D flash technology (BiCS3) and benefit from PLM "Product Life Management" which means that we can inform in advance about future possible evolutions.

## Main features

### Main characteristics :

- Available capacities : 16, 32, 64, 128 & 256Gb.
- Compatible only with USB3CFTV receptacles.
- Tri Start Thread coupling mechanism (MIL-DTL-38999 series III type) with anti-decoupling device.
- Shell size 11.
- PLM "Product Life Management" : future evolution and obsolescence notification.

### Data transmission :

- USB3.2 Gen1 max transfer rate : 5 Gb/s.
- Compatible with USB2.0 transfer with 480Mb/s.
- TLC 3D flash technology (BiCS3).
- MTBF: >4 000 000 hours.
- Global Wear Leveling.
- Flash bad-block management.

### Environmental protection :


- Sealed against fluids and dusts : IP68 mated.
- Salt spray: Aluminium shell :
  - Nickel plating ✓ : 48h
  - Black zinc nickel plating ✓ : 500h
  - Olive drab cadmium plating : 500h
  - Tin-zinc plating ✓ : 500h NEW
- Vibrations: MIL-STD-810-H, Method 514.8, Category 14
- Temperature range: - 40°C / +85°C (MIL-STD-810F)
- Data transmission during vibration & temperature tests

✓ : RoHS compliant

How to order : Please refer to page 129

## Overall dimension

Part number type: **USB3CF TV KEY 6 XX X XXX**

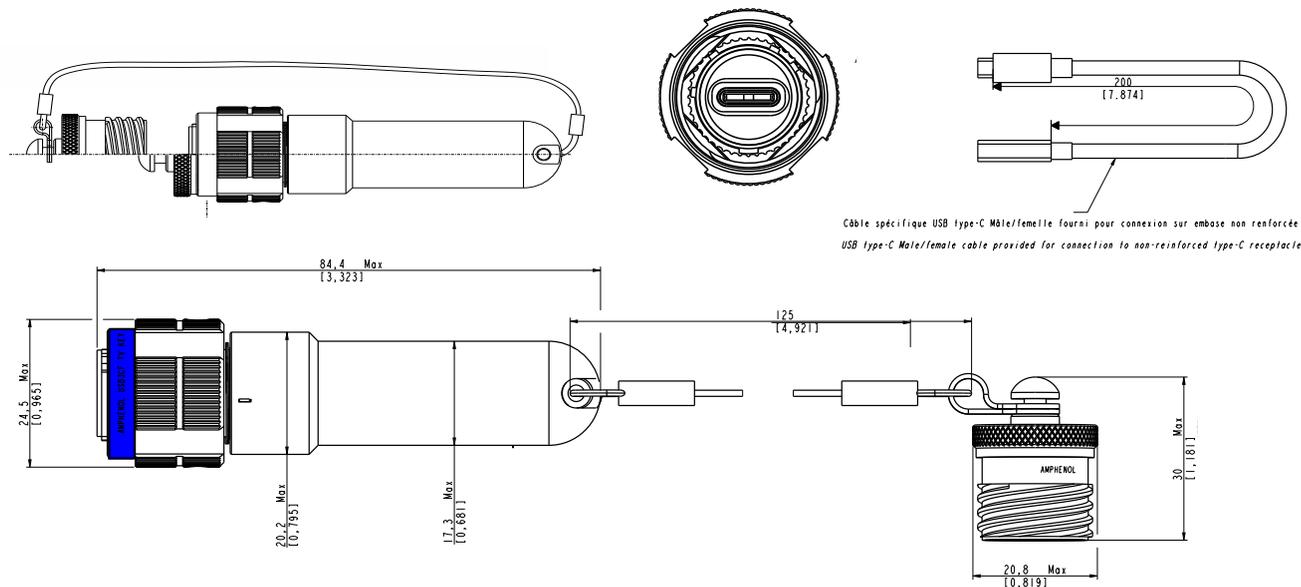

# USB3FTV™ MEMORY KEY



## Description

The USB3.2 Gen1 reinforced memory key allows you to carry sensitive information in total security. Its design, based on MIL-DTL-38999 series III can only be mated to our USB3FTV™ or USBFTV™ receptacles and is available, as standard, in capacities from 32 to 256Gb. We provide reinforced USB memory keys available in different capacities.

## Main features

### MAIN CHARACTERISTICS

- Type: USB3.2 Gen1 (capacities 32, 64, 128 & 256 GB)
- Only compatible with USB3FTV and USBFTV receptacle
- UBS-A
- Voltage: 5V DC - 500 mA max

### SPECIFIC FEATURES

- Engineering control (Product change notice & end of life Policy)
- Memory type: MLC (3000 read/write cycles)
- Wear Leveling function
- MTBF: 1,000,000 hours

### ENVIRONMENTAL PROTECTION


- Sealing: IP68 (when mated)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 500 h with black zinc nickel ✓
  - 500 h with tin-zinc ✓ NEW
- Vibrations: MIL-STD-810H method 514.8
- Temperature range: - 40°C / +85°C (MIL-STD-810F)
- Data transmission during vibration & temperature tests

✓: RoHS compliant

**How to order : Please refer to page 130**

## Overall dimension

Part number type: **USB3FTV KEY X XXX X XXX APA UV**

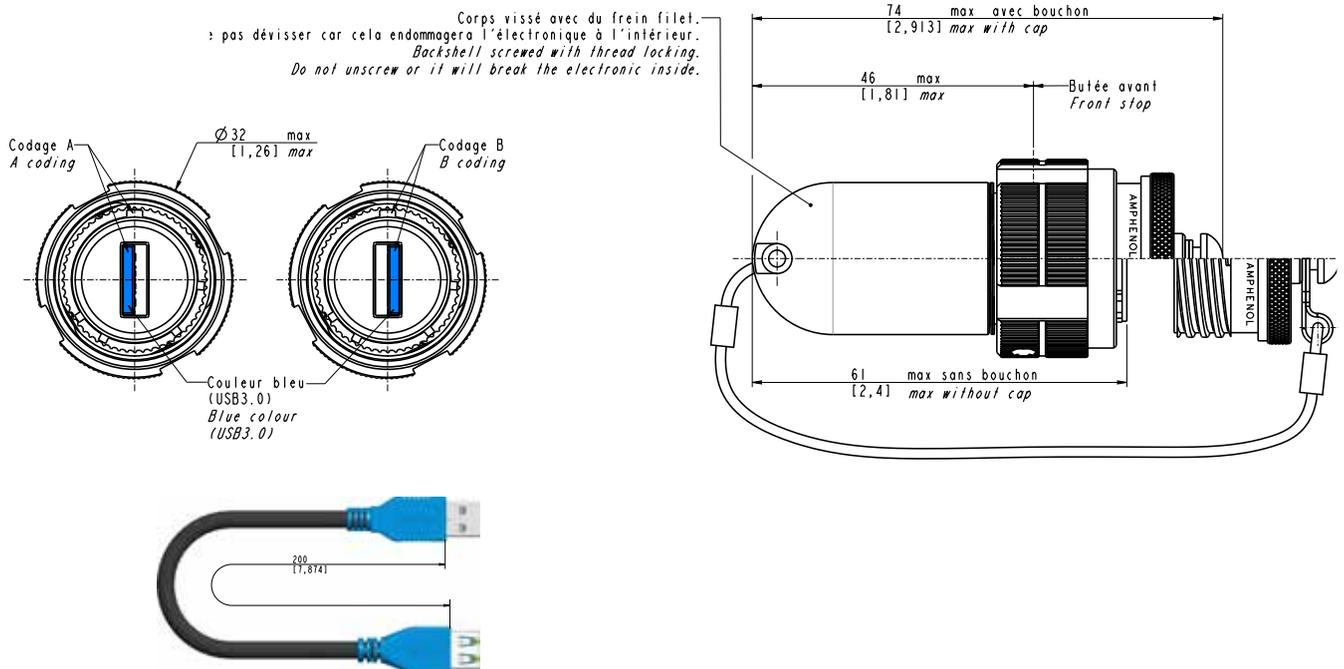

### Important note:

- Under request, we can provide you with electronic manufacturer details so you can check if their specific configuration will work with the electronic (please specify memory capacity).
- USB3FTV memory key has to be used with USBFTV receptacle (3.2 Gen1 and 2.0).

# USB3FTV™ MEMORY KEY HIGH CAPACITY



## Description

The USB3.2 Gen1 reinforced memory key allows you to carry sensitive information in total security. Its design, based on MIL-DTL-38999 series III can only be mated to our USB3FTV™ or USBFTV™ receptacles. The USB3.2 Gen1 reinforced memory key is available in high-capacity 512 Gb.

## Main features

### MAIN CHARACTERISTICS

- Type: USB3.2 Gen1 (capacities 512 GB)
- Only compatible with USB3FTV and USBFTV receptacle
- UBS-A
- Voltage: 5V DC - 500 mA max

### SPECIFIC FEATURES

- Engineering control (Product change notice & end of life Policy)
- Flash technology : 3D-BiSC4 TLC
- Wear Leveling function
- MTBF: 4,000,000 hours

### ENVIRONMENTAL PROTECTION




- Sealing: IP68 (when mated)
- Salt spray: - 48 h with nickel plating ✓  
- 500 h with olive drab cadmium  
- 500 h with black zinc nickel ✓
- Vibrations: MIL-STD-810H method 514.8
- Temperature range: - 40°C / +85°C (MIL-STD-810F)
- Data transmission during vibration & temperature tests

✓ : RoHS compliant

## Overall dimension

Part number type: 36875 X

Cordon mâle / femelle USB3.0  
Male / female USB3.0 cordset

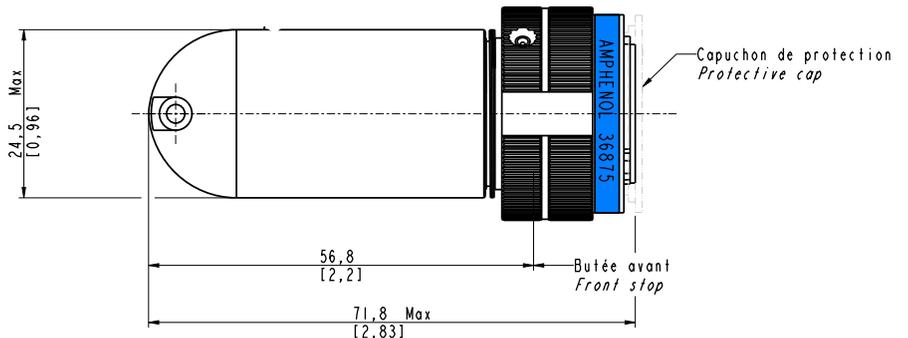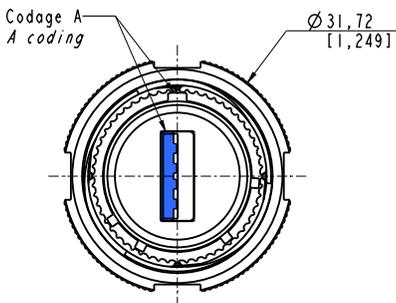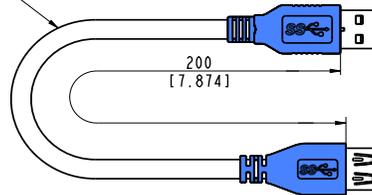

### Plating

Black zinc nickel ✓  
36 875 ZN

Nickel ✓  
36 875

Olive drab cadmium  
36 875 G

✓ : RoHS compliant

### Important note:



- Under request, we can provide you with electronic manufacturer details so you can check if their specific configuration will work with the electronic (please specify memory capacity).
- USB3FTV memory key has to be used with USBFTV receptacle (3.2 Gen1 and 2.0).

# USB3FTV™ MEMORY KEY HIGH CAPACITY




## Overall dimension

Part number type: 36884 X

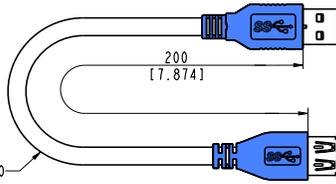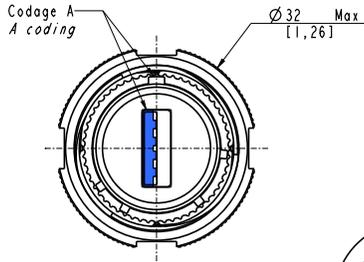

Cordon mâle / femelle USB3.0  
Male / female USB3.0 cordset

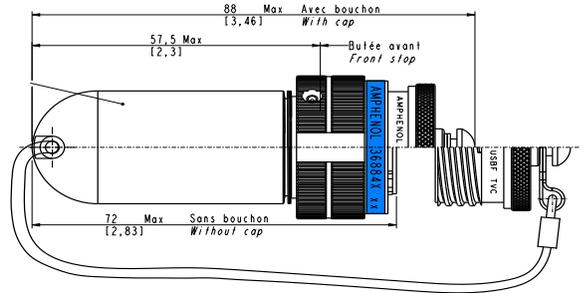

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

Plating		
Black zinc nickel ✓	Nickel ✓	Olive drab cadmium
36 884 ZN	36 884 N	36 884 G

✓ : RoHS compliant

# ROK - RUGGED OVAL KEY



## Description

**ROK, Rugged Oval Key** is a reinforced memory key that allows you to save and carry your information in total security. This memory key cannot be damaged. It is fire proof and so durable that it can be run over by truck and remain undamaged. This rugged memory key is available in capacities from 16 to 256Gb, fast with a USB3.2 Gen1 transfer rate of 5 Gb/s and can be connected to any USB port.

## Main features

### MAIN CHARACTERISTICS

- Type: USB3.2 Gen1 (capacities 32, 64, 128 & 256 GB)
- Compatible with any USB port receptacle.
- Black painting ✓

### DATA TRANSMISSION

- USB3.2 Gen1 max transfer rate : 5 Gb/s
- Compatible with USB2.0 transfer with 480Mb/s.

### ENVIRONMENTAL PROTECTION





- Resitance against shocks, fire, vibrations.
- Sealed against fluids and dusts : IP68 mated.
- Storage temperature : - 10°C / +70°C.
- Operating temperature : 0°C / +35°C.

✓: RoHS compliant

**How to order :** Please refer to page 131

## Overall dimension

Part number type: **USB3F KEY XXX X**

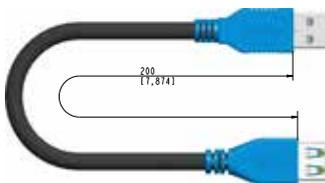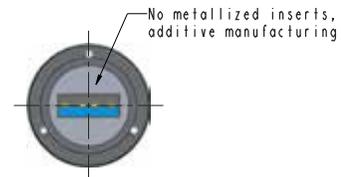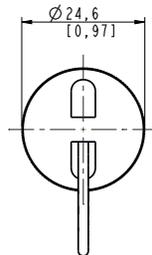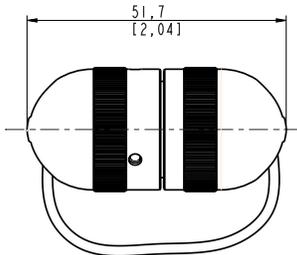

# USB3FTV - USB3.2 GEN 1 AMPLIFIER



## Description

The USB3.2 Gen1 protocol is limited to 3 meters. Our USB3.2 Gen1 amplifier allows you to extend the USB3 signal to 11 meters maximum.

We propose a standard range of amplifiers from 3 meters up to 8 meters (see How to order).

Using the USB3 amplifier selection guide below, please consider all your requirements and contact us.

## Main features

### MAIN CHARACTERISTICS

- An 8 meters USB3 amplifier can be connected with a 3 meters cordset to achieve a maximum length of 11 meters.
- USB3 cordset is provided by Amphenol.
- Shock, vibration and traction resistance
- Improved EMI protection
- Mate with our USB3FTV series (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h - Aluminum shell with Nickel plating ✓
  - 500 h - Aluminum shell with Black zinc nickel plating ✓
  - 500 h - Aluminum shell with Olive drab cadmium plating
  - 500 h - Aluminum shell with Tin-zinc plating ✓ NEW
  - 500 h - Marine bronze shell ✓
- Humidity: 21 days, 43°C, 98% humidity
- Temperature range: - 40°C / + 85°C

✓: RoHS compliant




**How to order : Please refer to page 132**

## Overall dimension


**Square flange receptacle – Shell type 2 - 4 mounting holes**

Part number type: **CA USB3 FTV 2 X X XX**

X: see the How to order to complete your part number

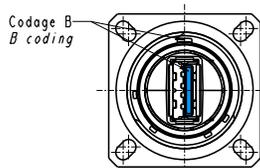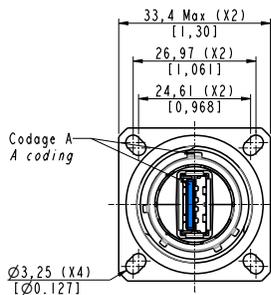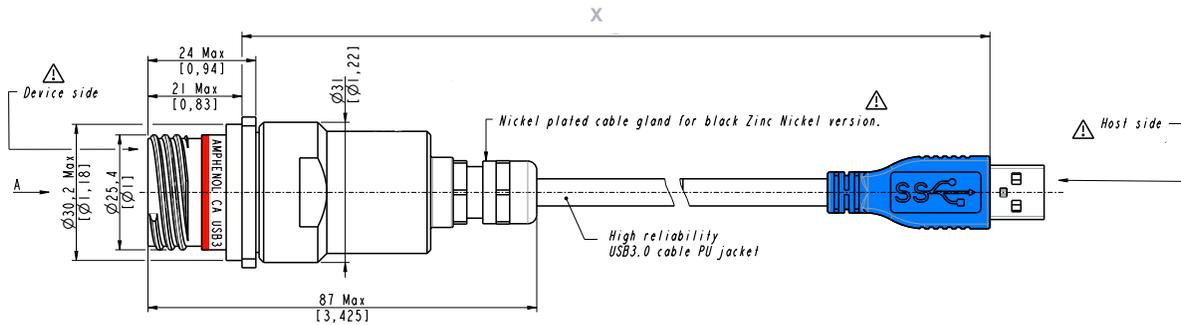

### Panel Drilling

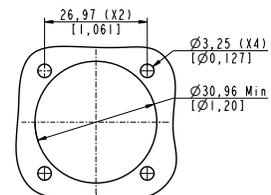

# USB3FTV - USB3.2 GEN 1 AMPLIFIER






## Overall dimension


Jam nut receptacle – Shell type 7 - Hexagonal nut mounting

Part number type: CA USB3 FTV 7 X X XX

X: see the How to order to complete your part number

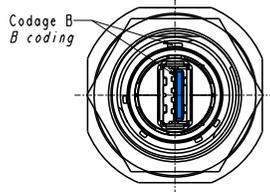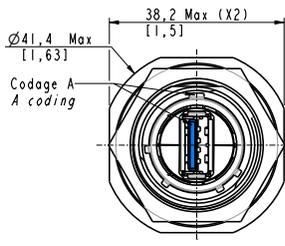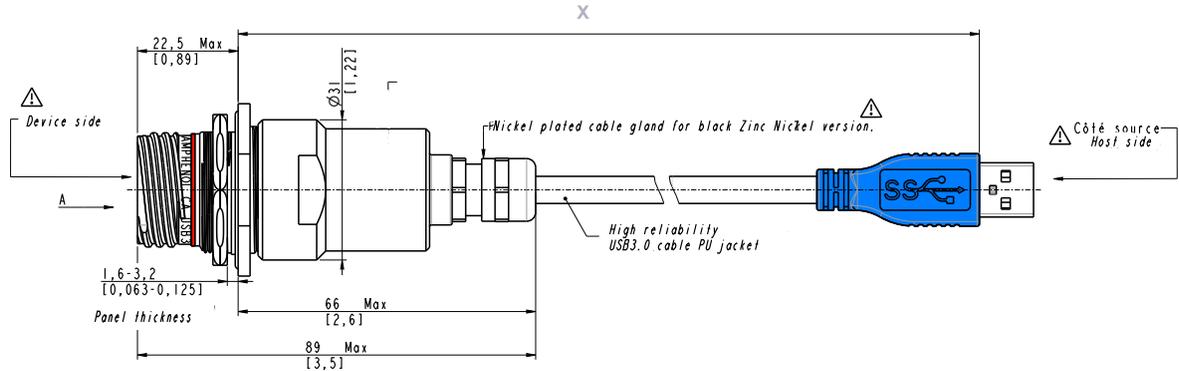

### Panel Drilling

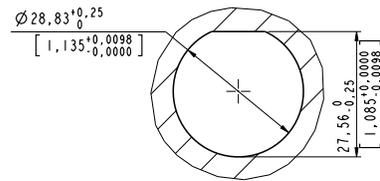


# USB3FTV - USB3.2 GEN 1 AMPLIFIER



## USB3 Amplifier selection guide

Define your own solution by selecting options in the scheme below

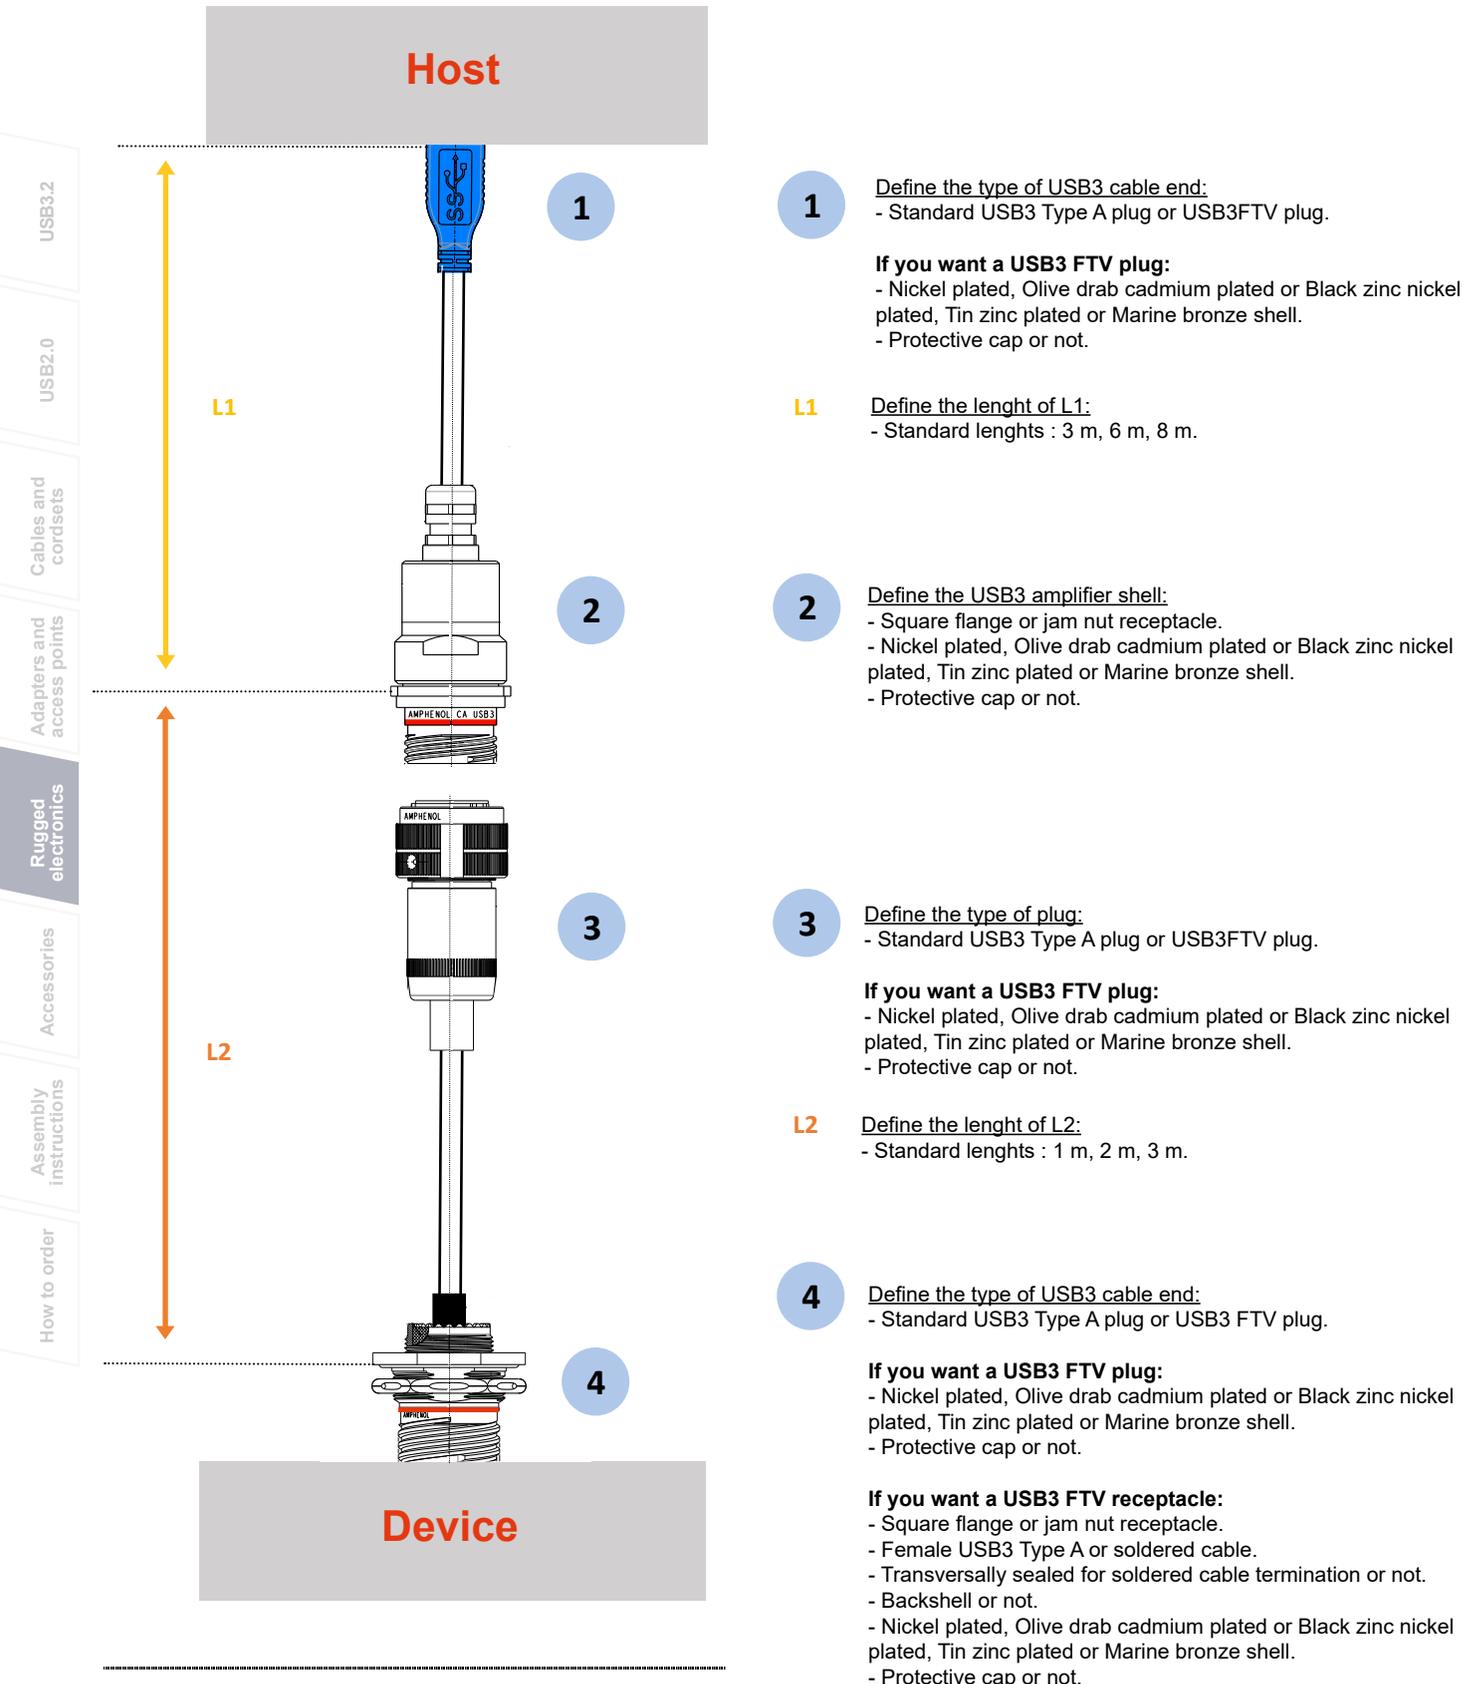

# USBFTV - USB2.0 AMPLIFIER



## Description

As the USB2.0 protocol is limited to 4.8 meters, the reinforced USB2.0 amplifier enables you to extend your USB signal to five times as much, almost 20 meters. This product is subject to custom design. With the help of the USB amplifier selection guide below, please consider all your requirements and reach out to us with your request.

## Main features

### MAIN CHARACTERISTICS


- Maximum 5 USB2.0 amplifier can be connected in order to reach 20 meters.
- USB2.0 cordset is provided by Amphenol.
- Sealed against fluids and dusts (IP68)
- Improved EMI protection
- Mate with our USBFTV™ series (MIL-DTL-38999 series III type) with anti-decoupling device - Shell size 15

### ENVIRONMENTAL PROTECTION

- Sealing (when mated): IP68 (temporary immersion)
- Salt spray:
  - 48 h with nickel plating ✓
  - 500 h with olive drab cadmium
  - 500 h with black zinc nickel ✓
- Humidity: 21 days, 43°C, 98% humidity
- Temperature range: - 40°C / +85°C

✓: RoHS compliant

## Example of configurations

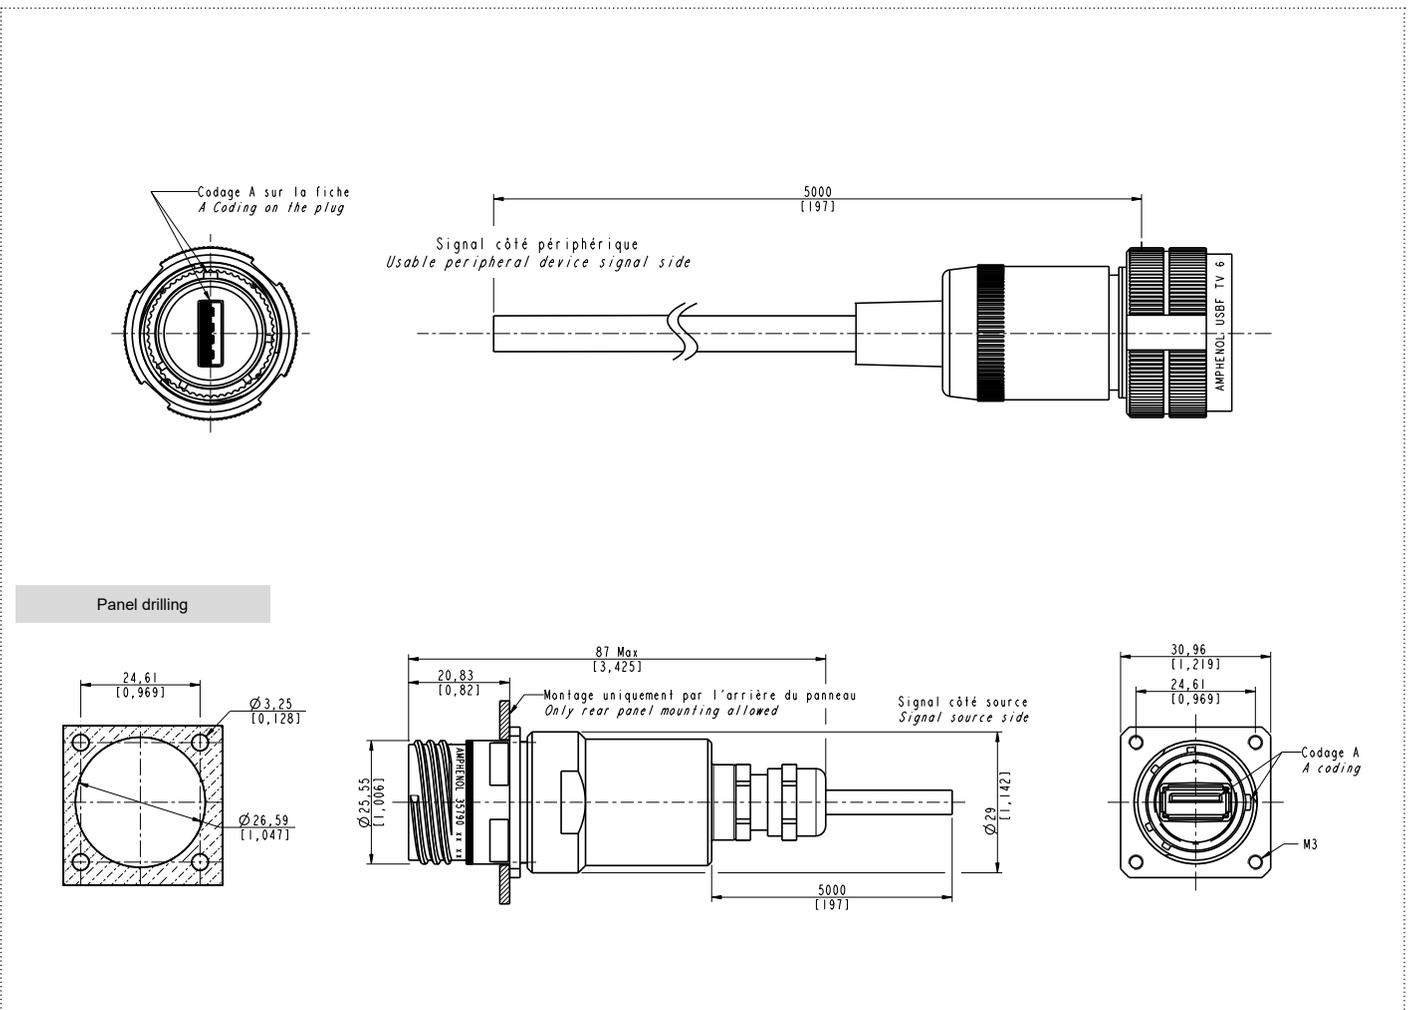


USB3.2  
USB2.0  
Cables and cordsets  
Adapters and access points  
Rugged electronics  
Accessories  
Assembly instructions  
How to order


# USBFTV - USB2.0 AMPLIFIER




## Example of configurations

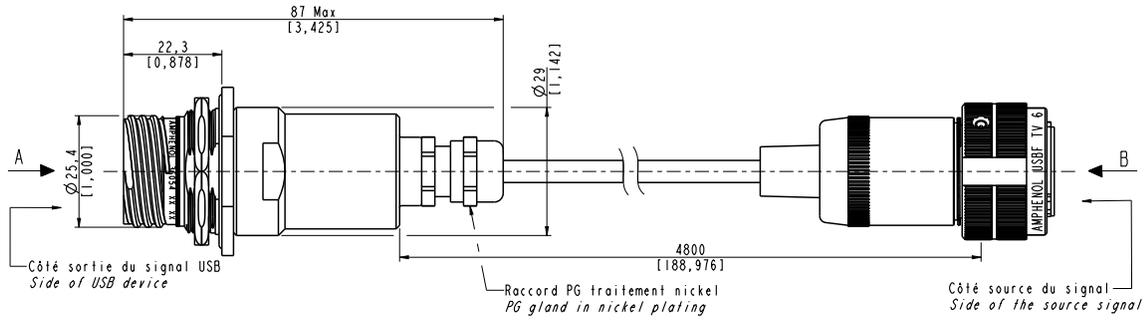


Panel drilling

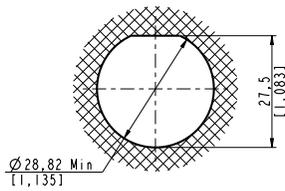

Coding A



Coding B

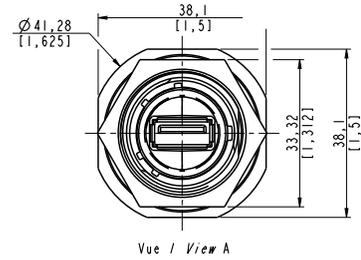

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions


How to order

# USBFTV - USB2.0 AMPLIFIER




## USB amplifier selection guide

Define your own solution by selecting options in the scheme below

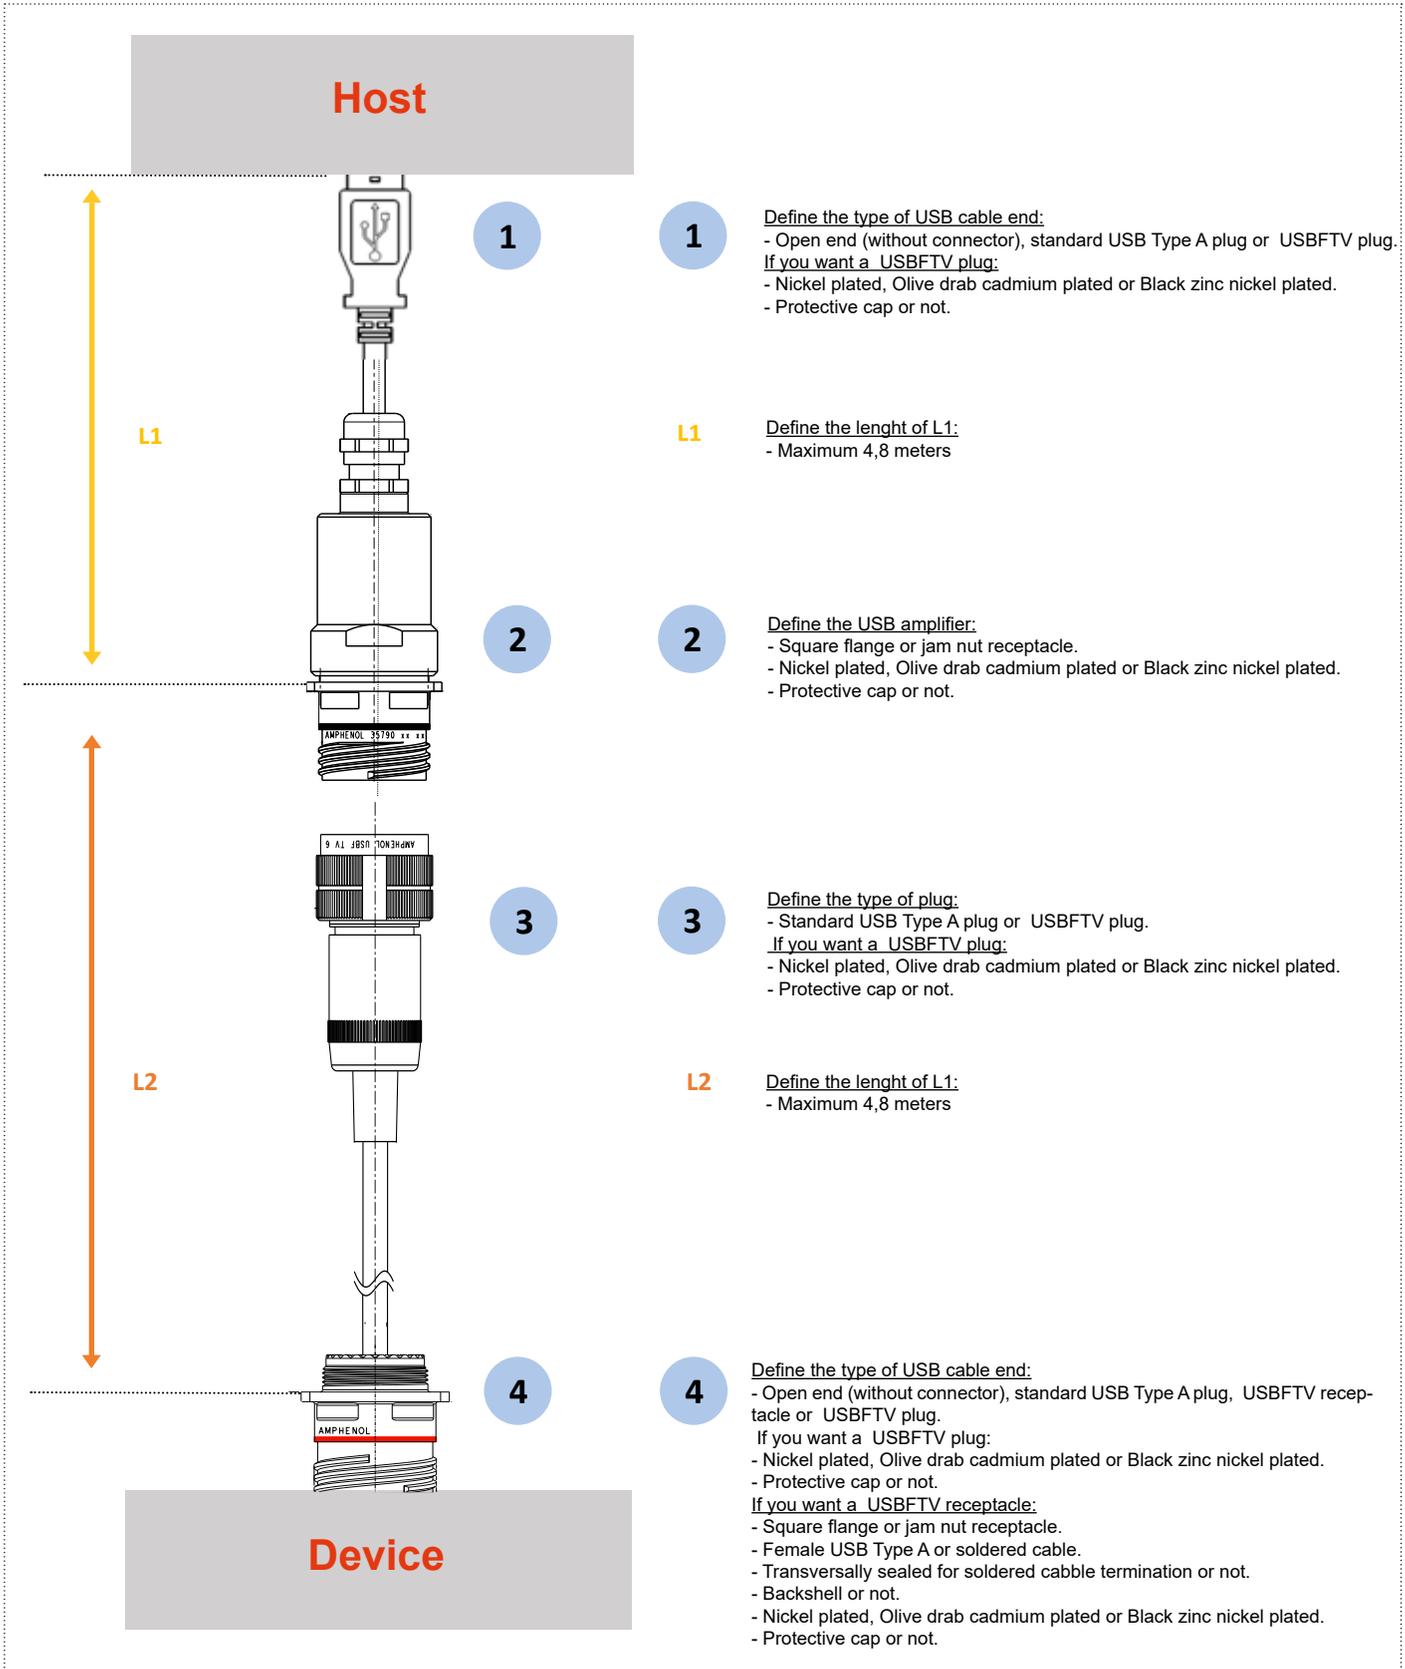

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order

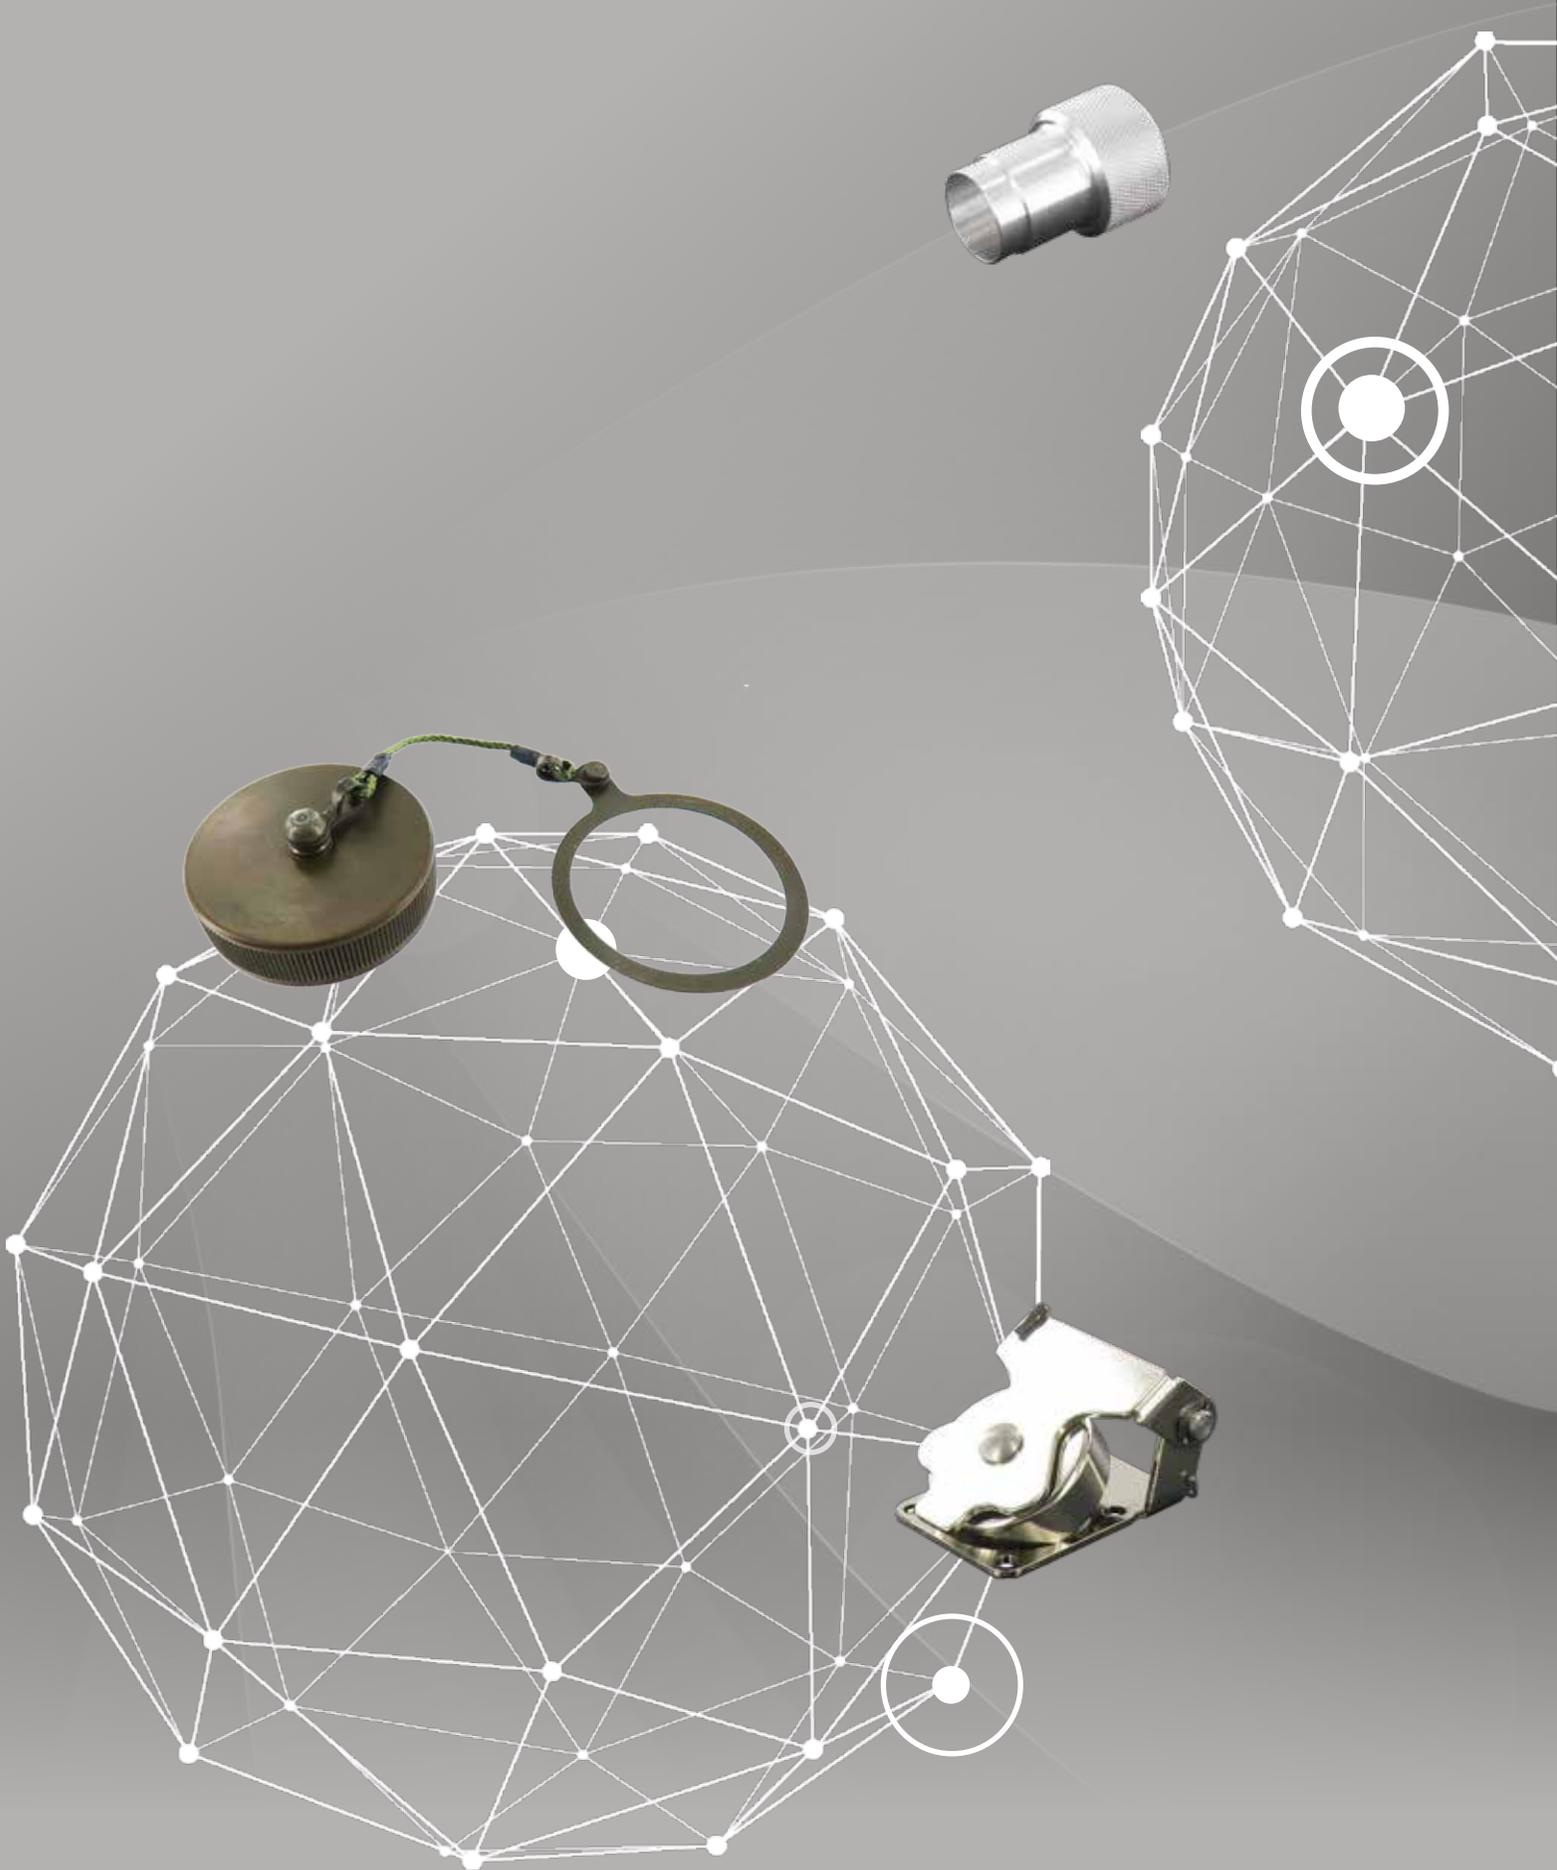

# ACCESSORIES



## Table of contents

<b>ACCESSORIES</b>	<b>99</b>
Standard protective cap - USBFTV™	100
Silicone protective cap - TVμCom-USB3.2	101
Self-closing cap - USBFTV™	102
Accessories - μCom-USB3.2	103
Accessories - TVμCom-USB3.2	104
Panel gasket and tool	105

## Compatibility table

	Connectors			
	USB3FTV™	USBFTV™	USBBFTV	USB3CFTV™
STANDARD PROTECTIVE CAP	USBFTV C	USBFTV C	USBFTV C	USBCFTV C
REDUCED FLANGE PROTECTIVE CAP	USBFTV C F057	USBFTV C F057	/	/
METALLIC SELF-CLOSING CAP	USBFTV SCC	USBFTV SCC	USBFTV SCC	TV SCC
PANEL GASKET	JE15	JE15	JE15	JE11
TOOL	USBF ODE	USBF ODE	/	/
REDUCED FLANGE TOOL	809684	/	/	809682

# STANDARD PROTECTIVE CAP - USBFTV™




## Standard protective cap

This standard protective cap derivate from MIL-DTL-38999 series III provide you a permanent sealing for plugs or receptacles.

**How to order :** Please refer to page 133 & 134

## Overall dimension

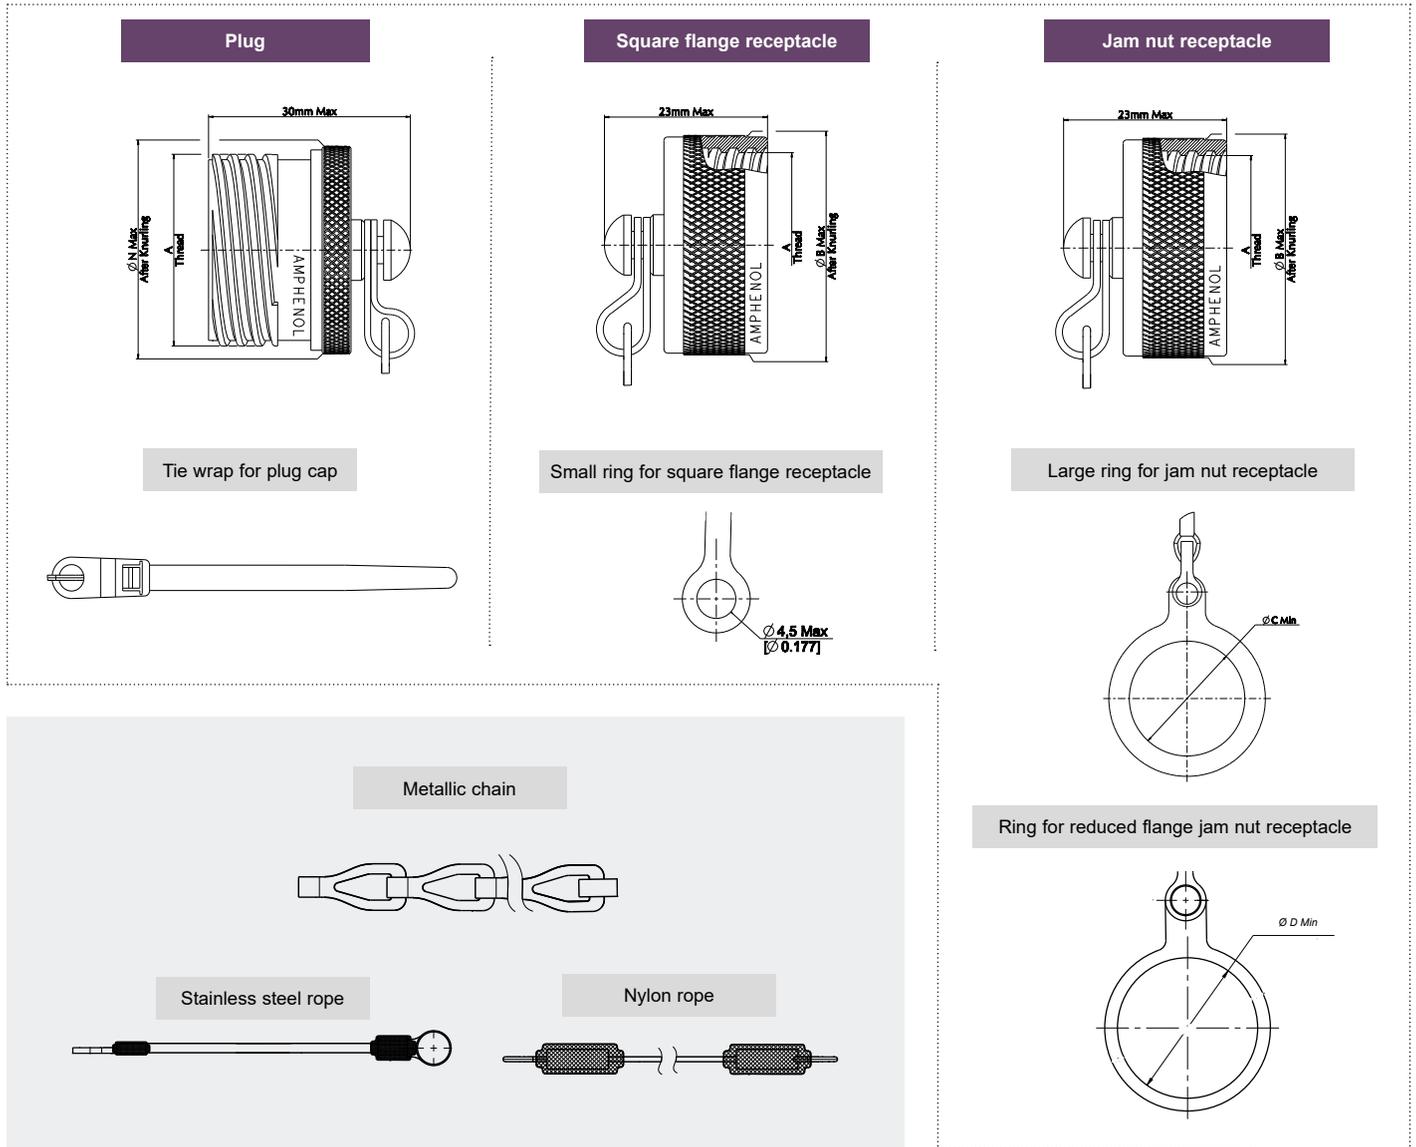

Shell size	Lanyard lenght		A Thread Class 2A ( External ) Class 2B ( Internal ) (inch)	ØB <sup>(+0.5)</sup>	ØN <sup>(-0.3)</sup>	ØC <sub>MIN</sub>	ØD <sub>MIN</sub>
	Plug	Receptacles					
11	160±5	127 (+13,-7)	.7500 0.1P-0.3L-TS	22.60	20.50	21.97	20.70
15			1.0000 0.1P-0.3L-TS	28.90	27.40	29.92	27.70

✓: RoHS compliant

# SILICONE PROTECTIVE CAP - TVUCOM-USB3.2

## Silicone protective cap

Silicone protective caps against dust and water.




### Main features

- Compatible with Jam nut and Square flange receptacles
- IP67 (1m, 1 hour sealing)
- Protection against dust and water
- Silicone 200°C
- Nylon cord
- No noise (rubber material)

**How to order :** Please refer to page 135

### Overall dimensions

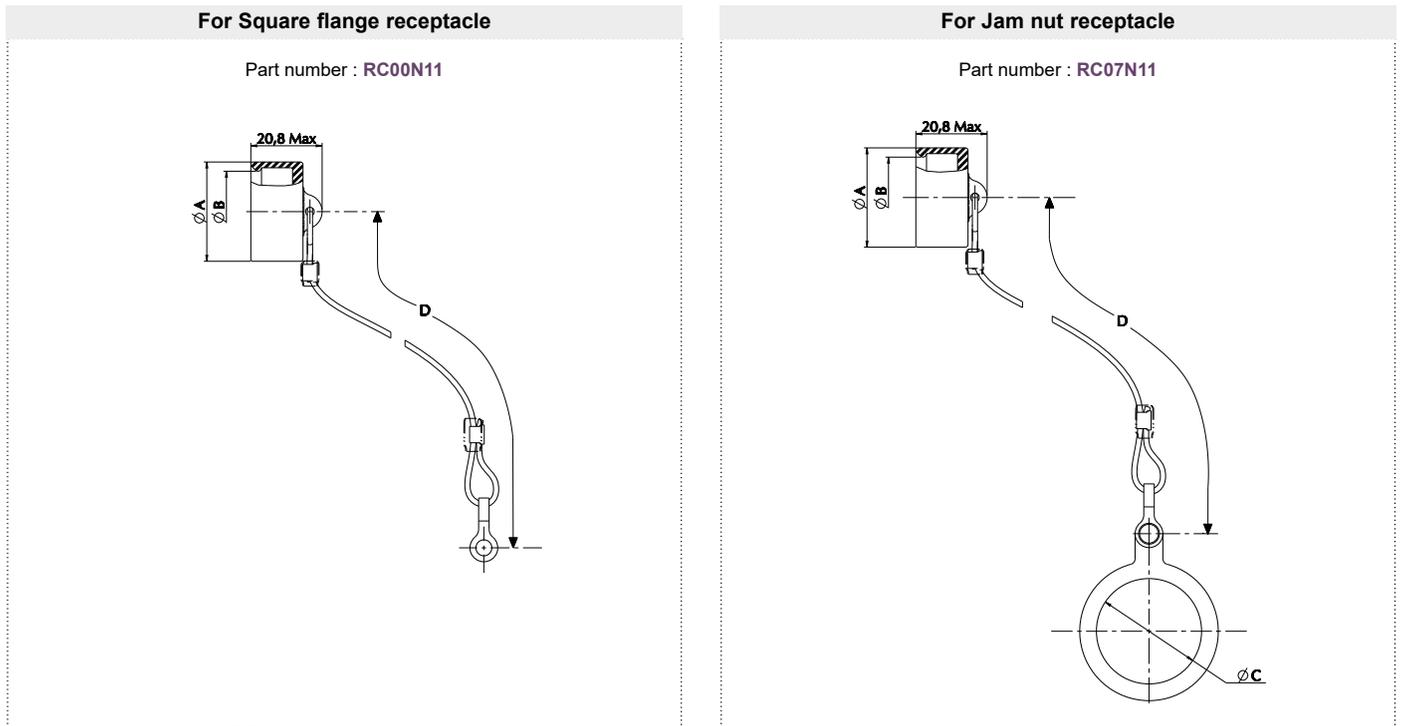

Size	Ø C +0,25 0	Ø A Max	Ø BMax	D Max
11	22,63	22,55	17,2	140


# SELF-CLOSING CAP - USBFTV™



## Metallic Self-Closing cap

With the metallic self-closing cap, your standard receptacles are protected with an IP67 and EMI protection with an integrated self-closing function.

### Overall dimension

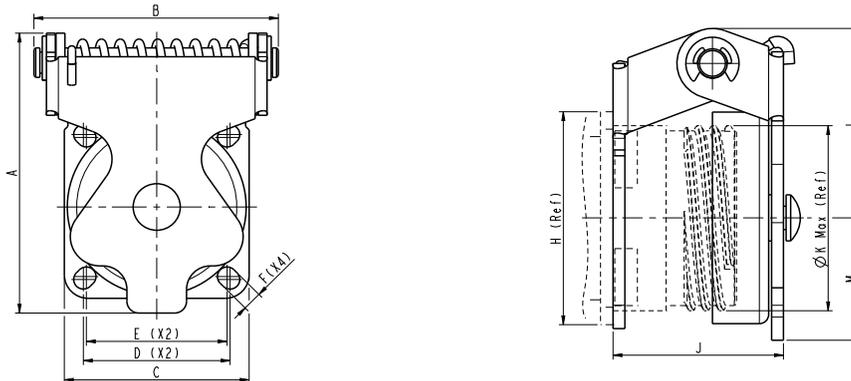

Size	A	B	C	D	E	F	H	J	ØK <sub>MAX</sub>	L	M	N	ØP <sub>MIN</sub>	ØQ + 0.13
11	43.0	27.2	27.2	20.62	18.26	3.25	26.19	31.2	19.05	27.0	16.0	20.62	15.88	3.25
15	47.5	41.0	31.0	24.61	23.61		30.96	30.9	25.4	29.5	18.0	24.61	23.01	

Size		Plating			
		Black coating ✓	Nickel ✓	Olive drab cadmium	Black Zinc Nickel ✓
11	Jam nut receptacle	/	TV 07 SCC 11 F	TV 07 SCC 11 W	TV 07 SCC 11 ZN
	Square flange receptacle	/	TV SCC 11 F	TV SCC 11 W	TV SCC 11 ZN
15	Jam nut receptacle	USBFTV 7 SCC B	USBFTV 7 SCC N	USBFTV 7 SCC G	USBFTV 7 SCC ZN
	Square flange receptacle	USBFTV SCC B	USBFTV SCC N	USBFTV SCC G	USBFTV SCC ZN

✓: RoHS compliant

**Important note:**

- Metallic self-closing cap must be used with a reinforced plug


# ACCESSORIES - UCOM-USB3.2

## Caps

### CAPS for receptacles

IP68 metallic cap

**X** to be replaced by  
**B** for Black electrophoresis plating  
**G** for Olive drab cadmium plating  
**U** for Unplated brass

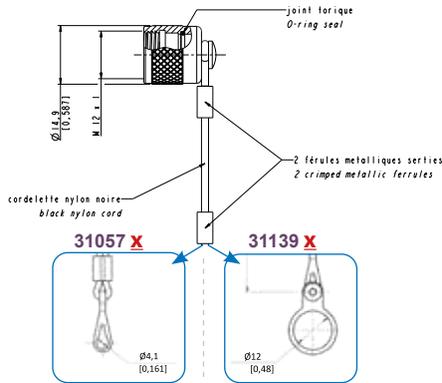

IP68 metallic cap with metallic tie on panel Or IP68 metallic cap with a Ø12 fixation ring  
 Nota: plan a hole on the panel

IP68 neoprene cap - Part number: 31091  
 Nota: plan a type M3 hole on the panel



### CAPS for plugs

Cap in neoprene  
 Part number: 31092




### CAPS for in line receptacles

Cap in neoprene  
 Part number: 31093



### Dummy female receptacle

Part number: 31131 **X**

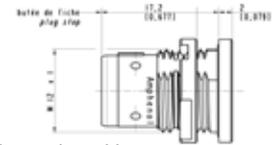

**X** to be replaced by  
**B** for Black nickel plating  
**G** for Olive drab cadmium plating  
**U** for Unplated brass

## Spares

Crimp Pin (10 pcs)  
 Part number: 31537



Crimp Socket (10 pcs)  
 Part number: 31074




# ACCESSORIES - TVUCOM-USB3.2



## Accessories

### Special Backshells

Part number type: TV UCOM X X

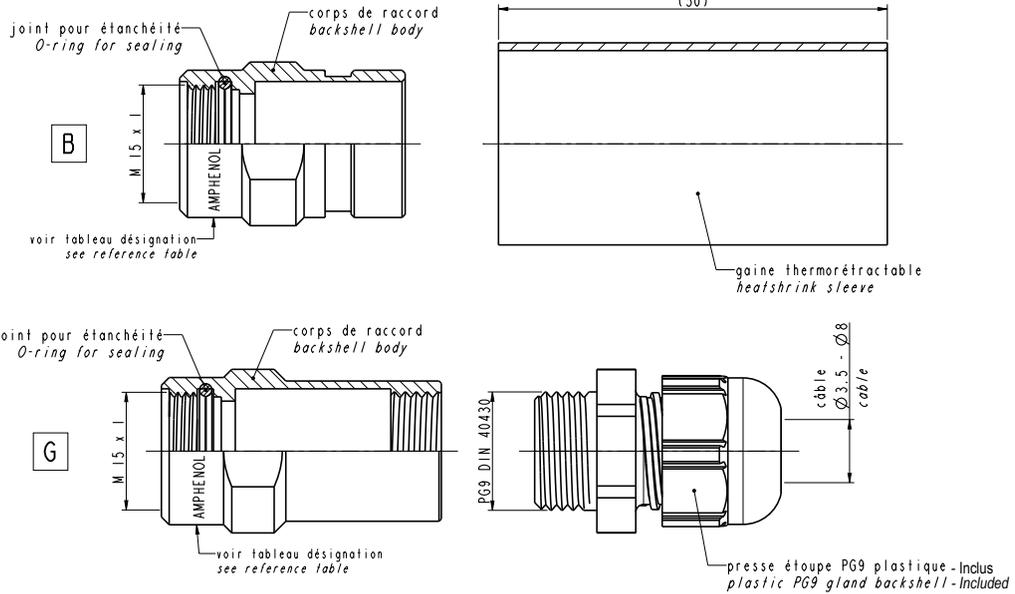

### Spares

**Crimp Pin (10 pcs)**  
Part number: 31537



**Part number: JE11**  
(thickness: 0,8 mm [.031])



**Crimp Socket (10 pcs)**  
Part number: 31074



USB3.0

USB2.0

Cables and  
cordsets

Adapters and  
access points

Rugged  
electronics

Accessories

Assembly  
instructions

How to order

# PANEL GASKET AND TOOL




## Panel gasket for square flange receptacle

Part number	Thickness (mm)	Color	Picture
JE15	0.6	Blue	
JE11 (USB3CFTV)			

## Tools - USBFTV


Part number: **USBF ODE**

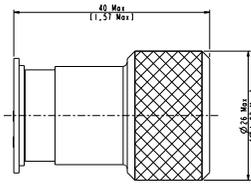

**Important note:**

- USBF ODE is used to remove the module of the receptacle. Insert the slot face part of the USBF ODE part into the front of the receptacle and push.
- For more details, please refer to "Assembly instructions" page 80 to 82.

Part number: **809684**

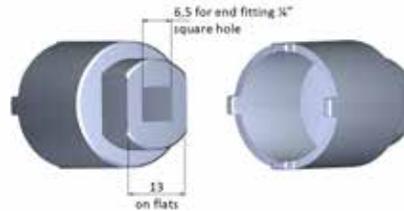

**Important note:**

- This tool is used to tighten the castle nut of the reduced flange receptacle.
- Insert the four teeth face of the tool into the castle nut and tighten at the recommended force.
- For more details, please refer to "Assembly instructions" page 80 to 82.

## Tools - μCom-USB3.2



- Insertion tool for crimp contacts  
Part number: **31056**



- Contact positioner for M22520/2-01 crimping tool  
Part number: **31095**



- Nut clamping tool for receptacle  
Part number: **31055**  
Only for RPx receptacles

**Other tools:**

- Brazing tool for receptacle & in-line receptacle  
Part number: **31132**
- Brazing tool for plug  
Part number: **31133**

**Nota:** the cabling instructions are available upon demand (ref. N00-040190-00).

## Tools - TVμCom-USB3.2




- Insertion tool for crimp contacts  
Part number: **31056**



- Contact positioner for M22520/2-01 crimping tool  
Part number: **31095**

## Removal tool

Part number: **TV UCOM ODE**

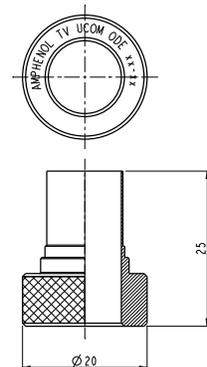

# NOTES

Horizontal dotted lines for taking notes.

USB3.0

USB2.0

Cables and cordsets


Adapters and access points

Rugged electronics


Accessories

Assembly instructions

How to order

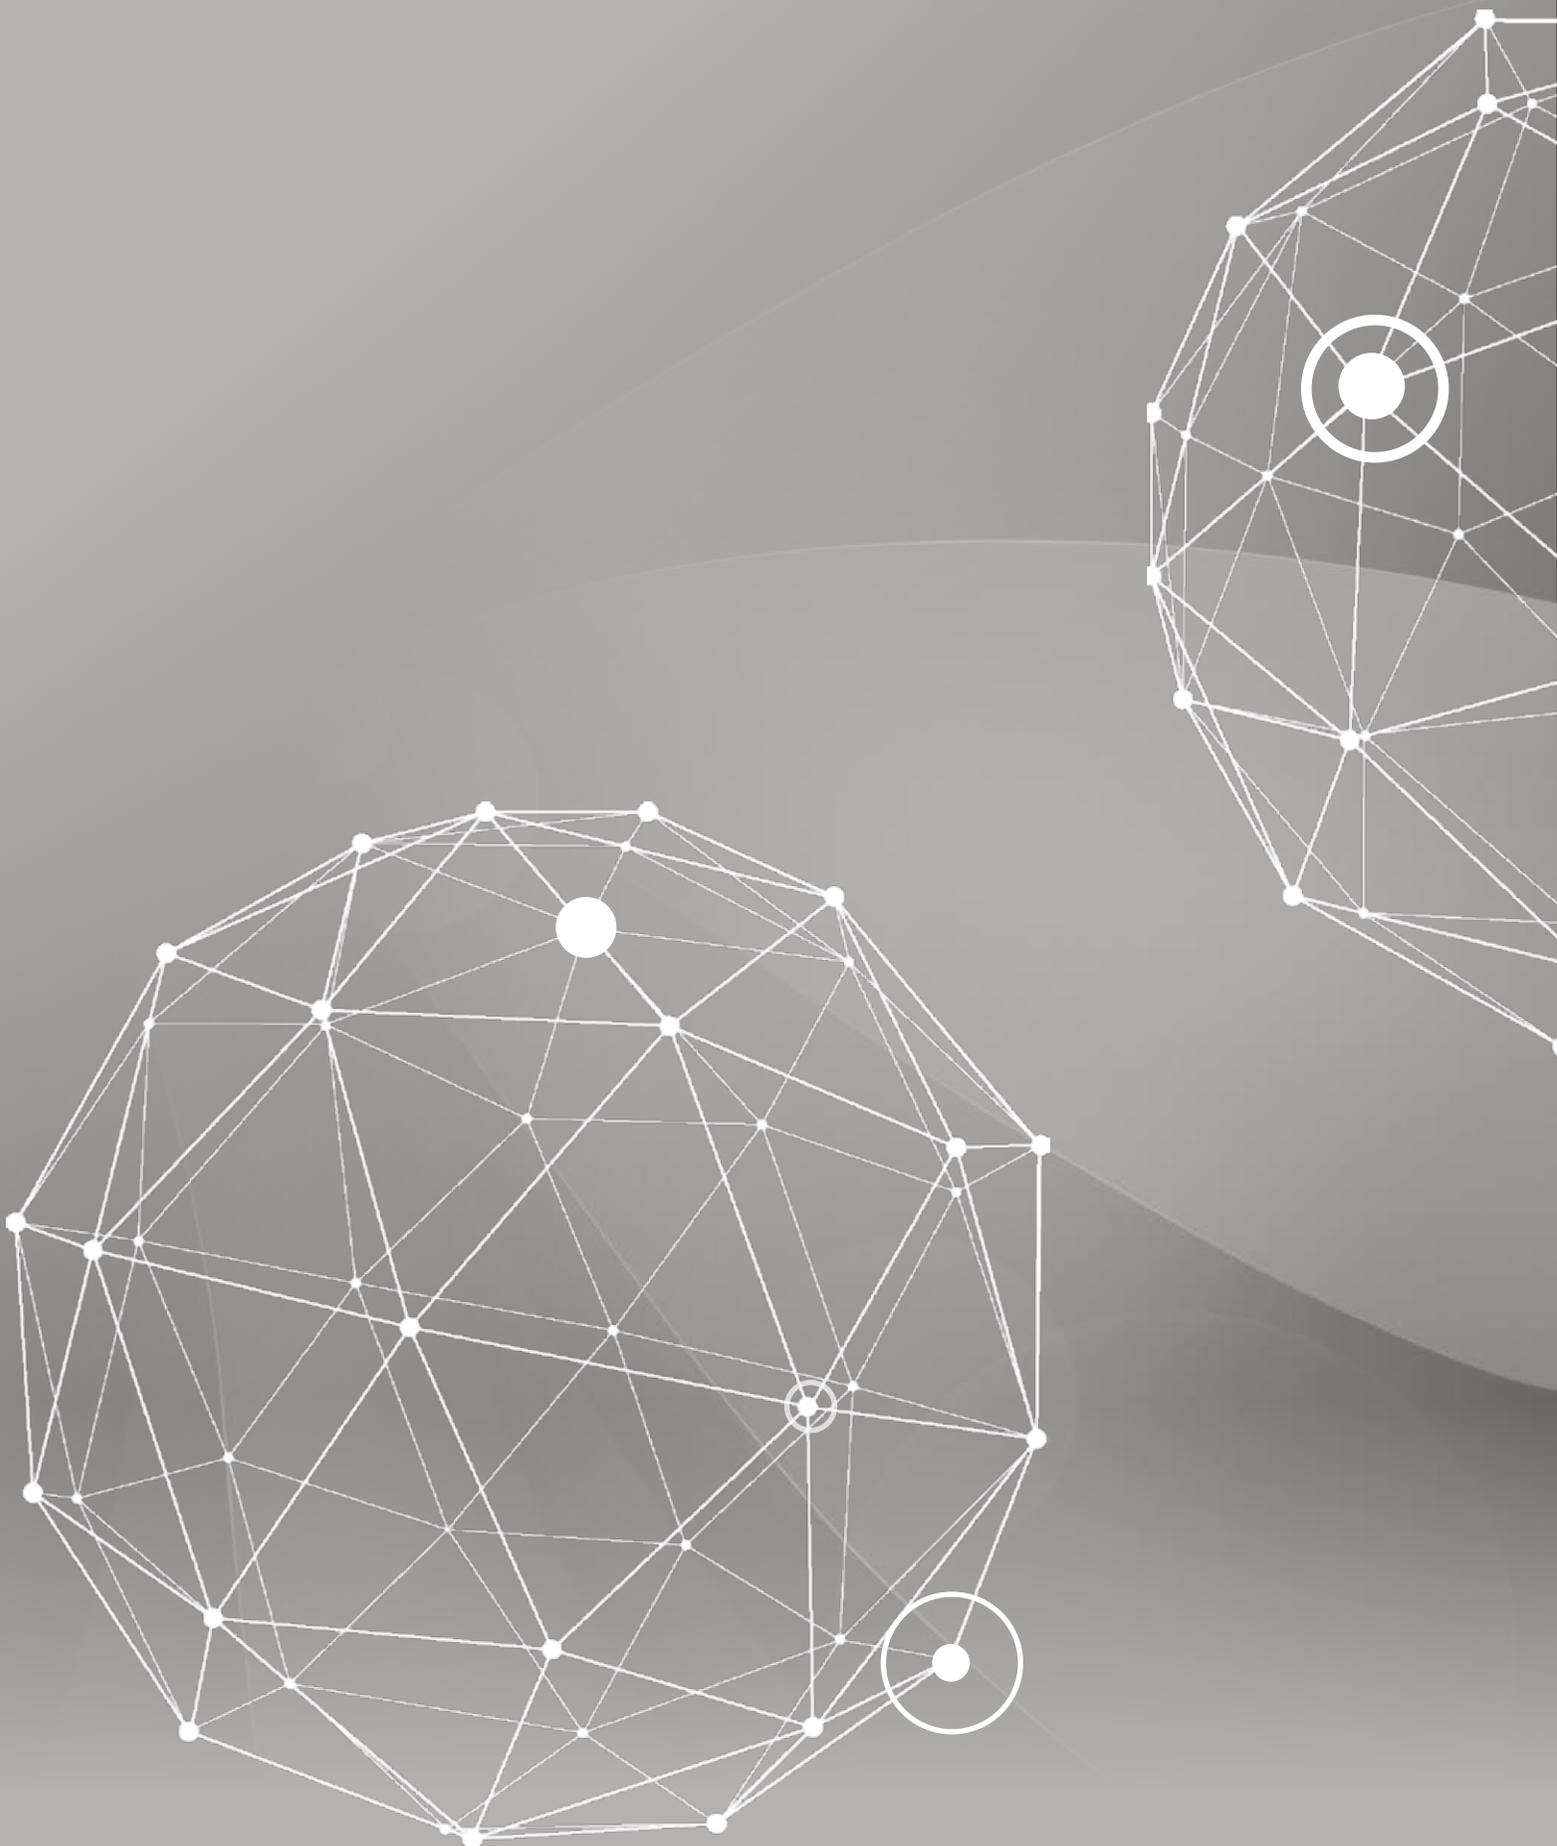

# ASSEMBLY INSTRUCTIONS

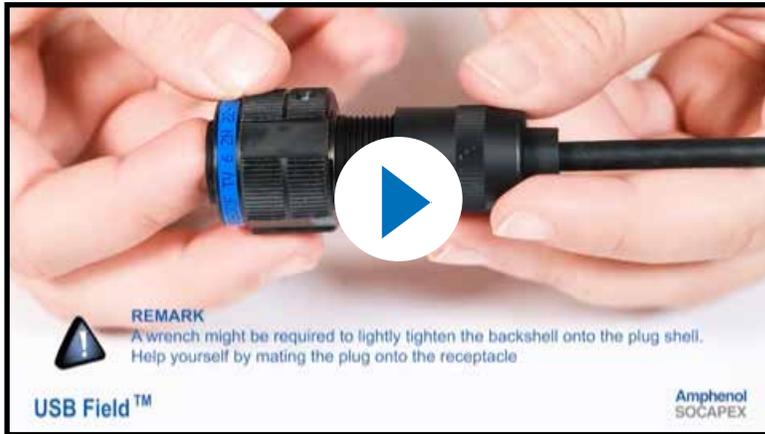

USB Field Assembly



USB Type-C Assembly




## Table of contents

<b>ASSEMBLY INSTRUCTIONS</b>	<b>108</b>
USB3FTV™	109
USBFTV™ and USBBF TV	111

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions**
- How to order

# ASSEMBLY INSTRUCTION - USB3FTV™

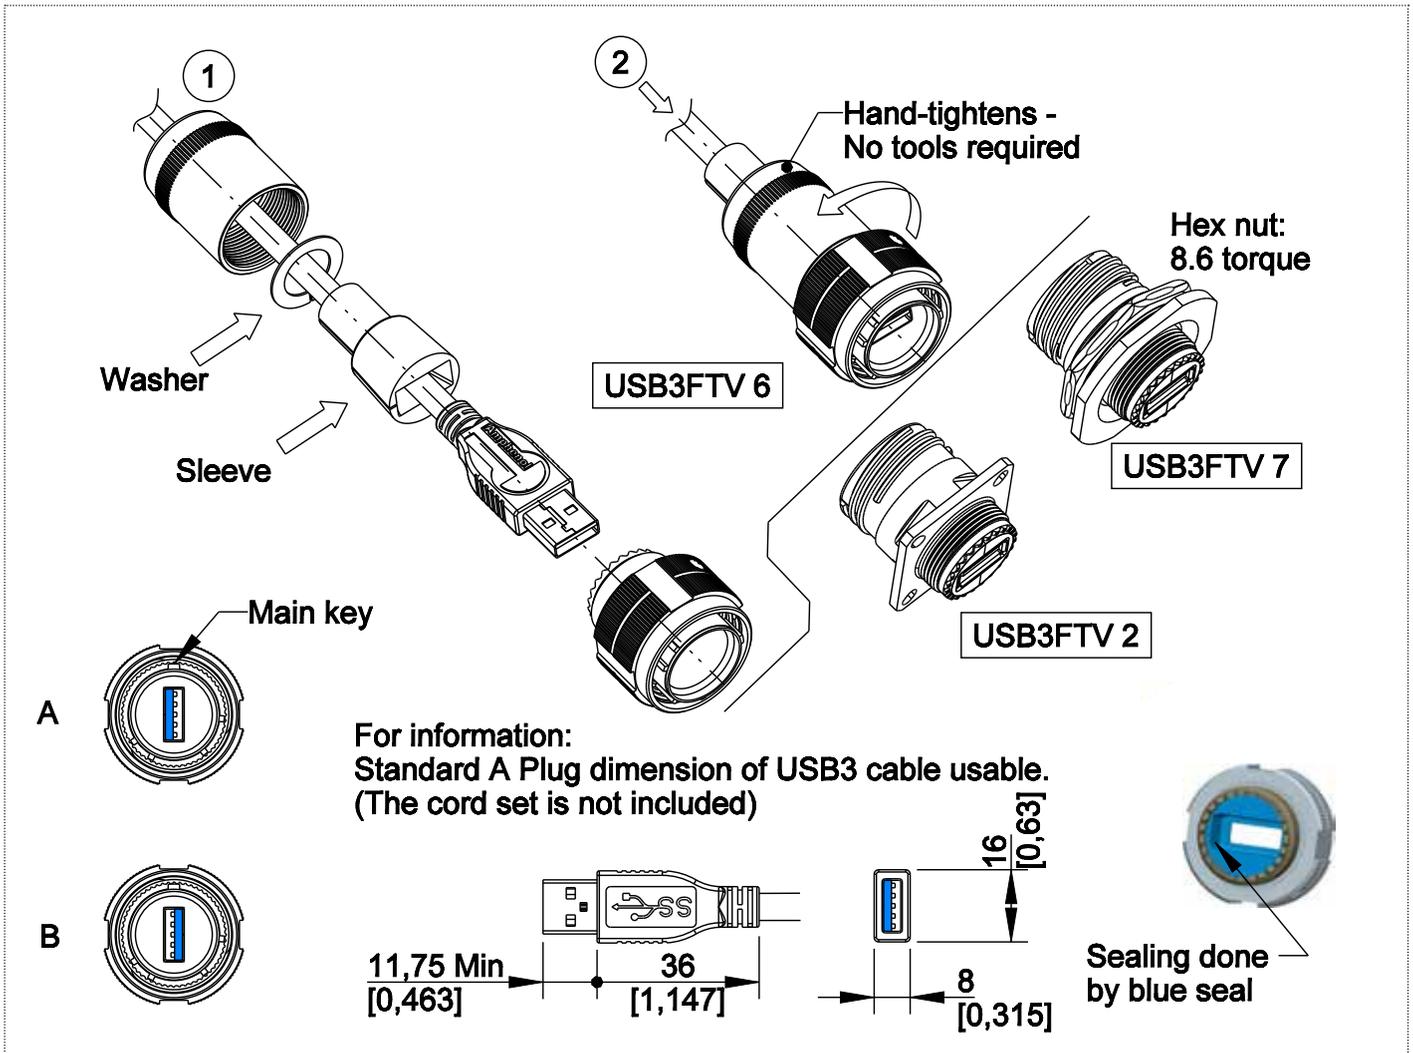

**Notes:**

- Can be assemble with all standard USB cordset.
- No tool required.

**Recommend Torque value:**

		Body	Gland	Hex-nut
Plug	USB3FTV 6	/	Hand-tightens - No tool required	/
	USB3FTV 2 PE	/	Hand-tightens - No tool required	/
Receptacle	USB3FTV 2 PEM	7.5 Nm	2.5 to 3 Nm max	/
	USB3FTV 7	/	/	86Nm
	USB3FTV 7 PE	/	Hand-tightens - No tool required	86Nm
	USB3FTV 7 PEM	7.5 Nm	2.5 to 3 Nm max	86Nm

## Assembly video




See our assembly video on youtube :  
[www.youtube.com/AmphenolSocapex](http://www.youtube.com/AmphenolSocapex)

- Amphenol USBFIELD assembly - Rugged USB connector


# ASSEMBLY INSTRUCTION - USB3FTV™

## Crossed or straight

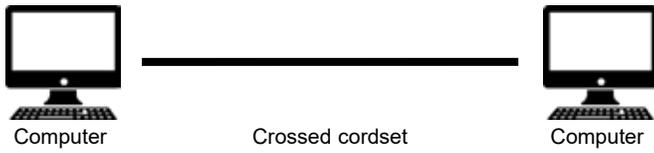



Straight and Crossed USB3.2 Gen1 cables are wired differently from each other.

Straight USB3.2 Gen1 connection has the exact same wire arrangement on both side. It is used to connect computers to USB keys.

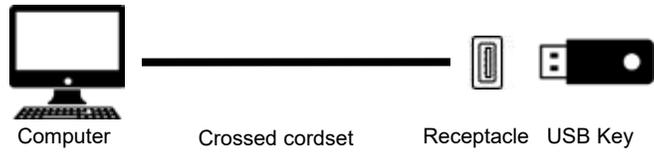

Crossed USB3.2 Gen1 connection is used to connect two computers.


Please note that our USB3.2 Gen1 receptacle are, by conception, crossed.

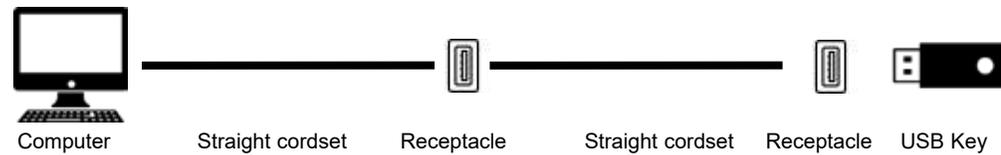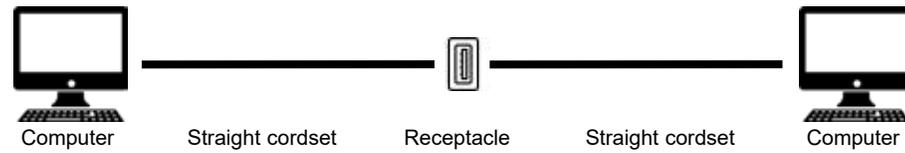

 : Amphenol receptacle is always crossed.

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order

# ASSEMBLY INSTRUCTION - USBFTV™ AND USBBFTV

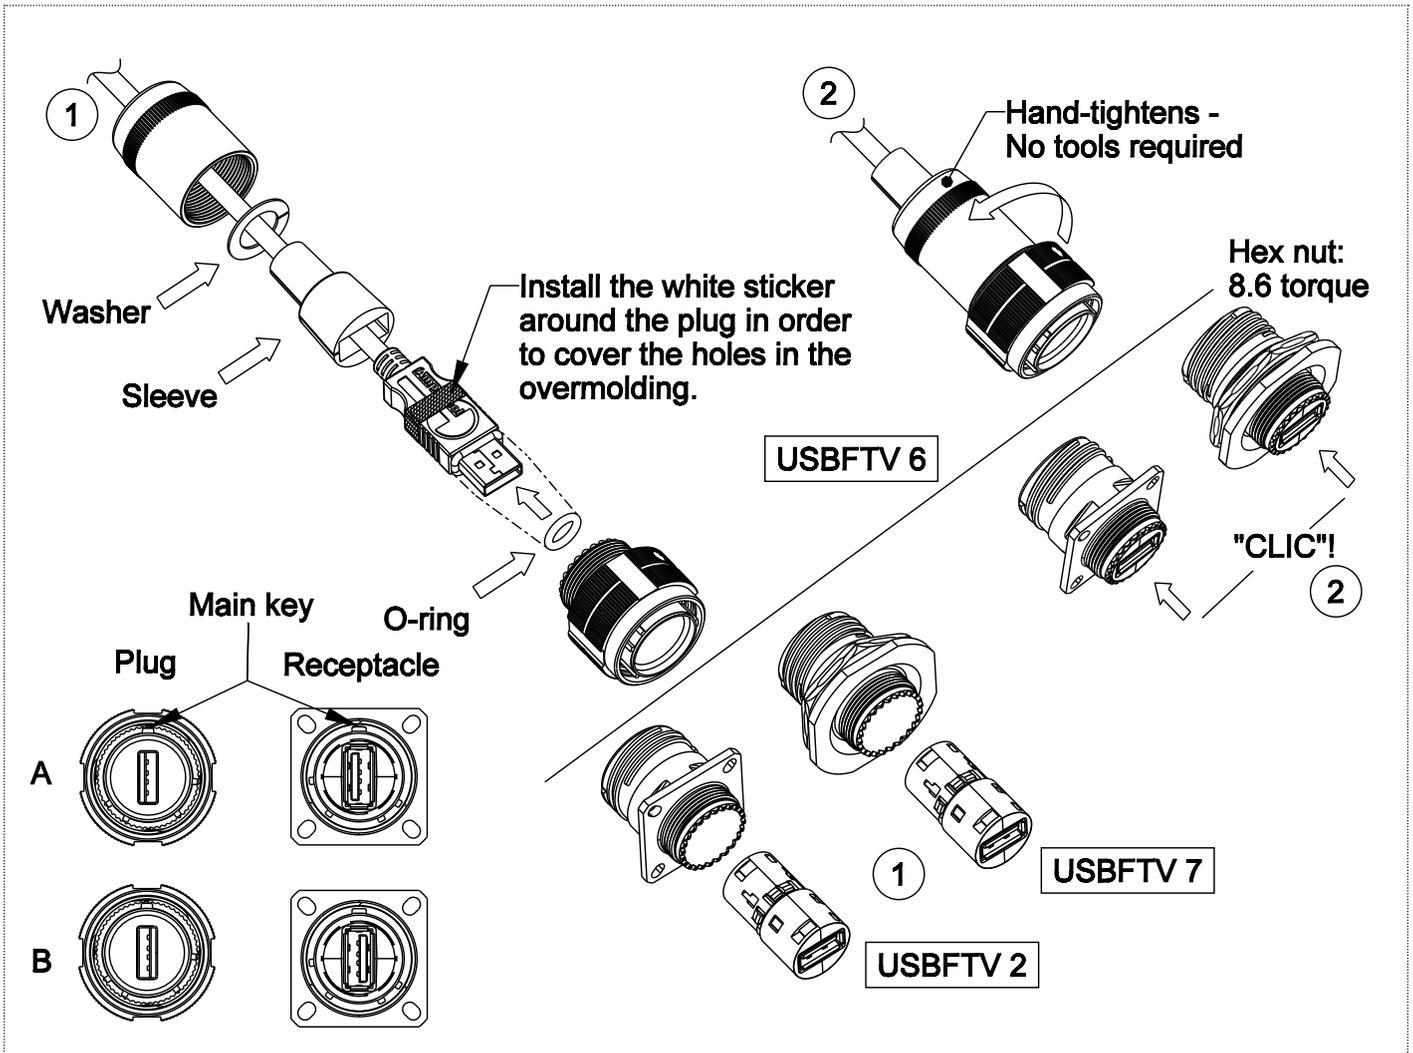

**Notes:**

- Can be assembled with all standard USB cordset.
- No tool required.

**Recommend Torque value:**

		Body	Gland	Hex-nut
Plug	USBFTV 6	/	Hand-tightens - No tool required	/
	USBFTV 2 PE	/	Hand-tightens - No tool required	/
	USBFTV 2 PEM	7.5 Nm	2.5 to 3 Nm max	/
Receptacle	USBFTV 7	/	/	8.6 Nm
	USBFTV 7 PE	/	Hand-tightens - No tool required	8.6 Nm
	USBFTV 7 PEM	7.5 Nm	2.5 to 3 Nm max	8.6 Nm

## Assembly video




See our assembly video on Youtube : [www.youtube.com/AmphenolSocapex](http://www.youtube.com/AmphenolSocapex)

- Amphenol USBFIELD assembly - Rugged USB connector

# NOTES

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions**
- How to order

Area for handwritten notes, featuring horizontal dotted lines.

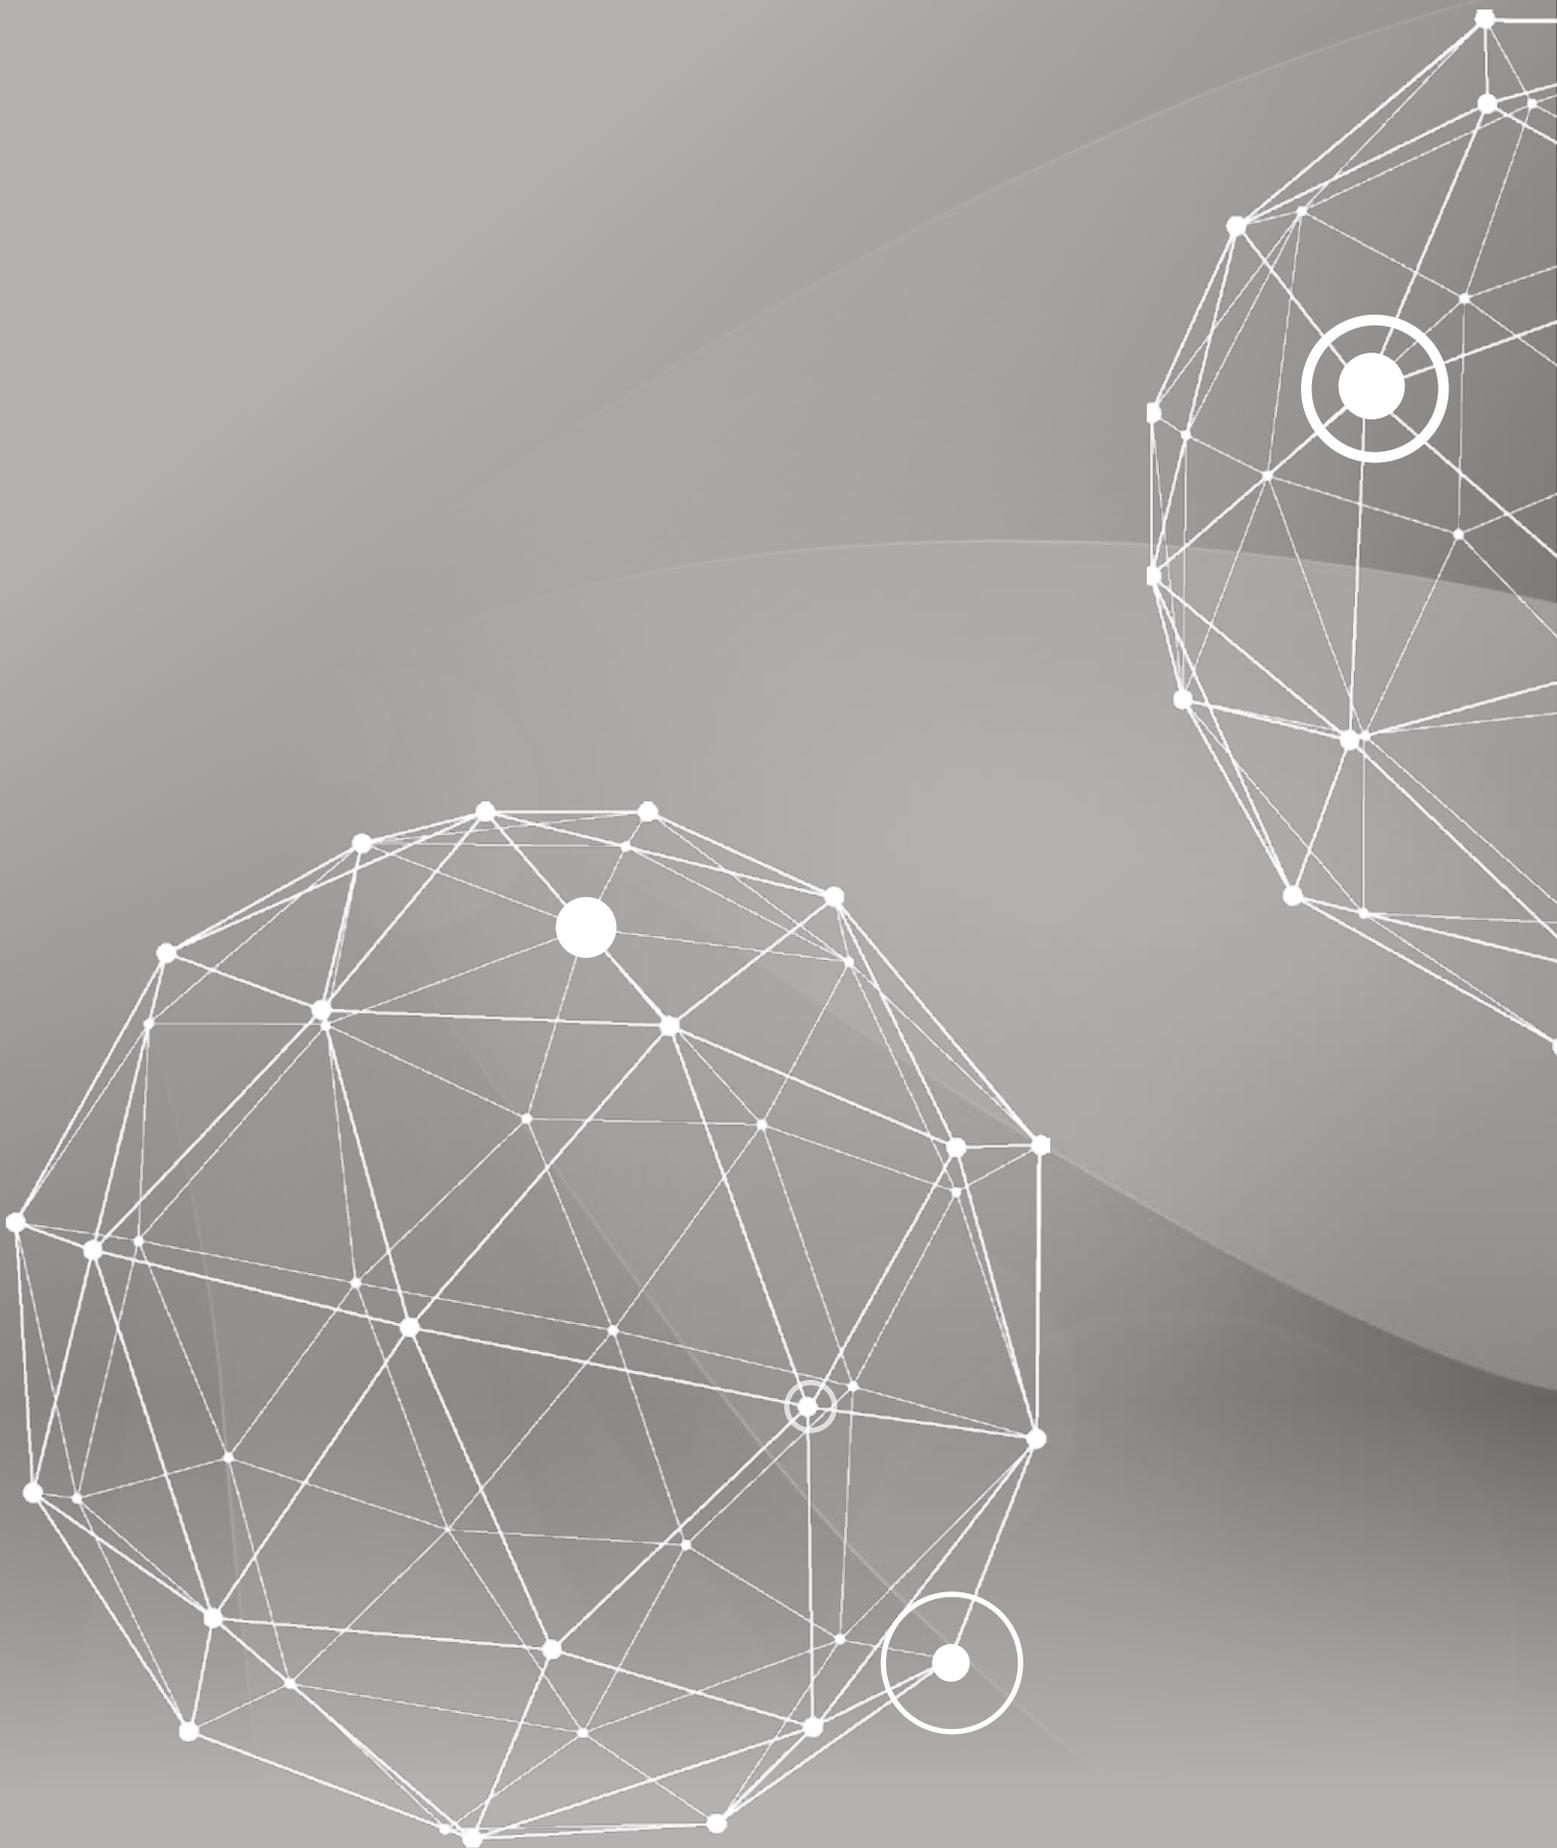

# HOW TO ORDER

## HOW TO ORDER

114

USB3CFTV™ - Plug and receptacle	115
USB3FTV™ - Plug and receptacle	116
USB3FTV™ - Transversally sealed and hermetic receptacle	117
USB3FTV™ - VG96949	118
μCom-USB3.2 & TVμCom-USB3.2	119
USBFTV™ - Plug and receptacle	121
USBFTV™ - Transversally sealed and hermetic receptacle	122
USBFTV™ - Atex Zone 2	123
USBBFTV™ - Plug and receptacle	124
USBBFTV™ - Transversally sealed receptacle	125
Cable	126
Cordset	127
Composite USB3.2 Gen 1 access point	128
USB3CFTV Memory Key	129
USB3FTV™ Memory Key	130
ROK - Rugged Oval Key	131
USB3FTV™ - USB3.2 Gen 1 amplifier	132
Standard protective cap	133
Standard protective cap - TVμCom-USB3.2	134
Silicone protective cap - TVμCom-USB3.2	135

USB3.2

USB2.0

Cables and  
cordsetsAdapters and  
access pointsRugged  
electronics

Accessories

Assembly  
instructions

How to order

# HOW TO ORDER - USB3CFTV™ PLUG AND RECEPTACLE

1. Series	2. Shell type	3. USB output	4. Material and platings	5. Cordset length	6. Deviation
USB3CFTV	7		G	100	F312

### 1. Series

USB3CFTV	USB3CFTV series
----------	-----------------

### 2. Shell type

6	Plug
2	Square flange receptacle
7	Jam nut receptacle

### 3. USB output (only for receptacle)

2	Male USB type-C termination
Blank	Cordset or PC tail contacts

### 4. Material and platings

	Shell material	Shell plating
G		Olive drab cadmium
N	Aluminum	Nickel ✓
ZN		Black zinc nickel ✓
TZ		Tin Zinc ✓ 
BZ	Bronze ✓	
S	Stainless steel	Passivated ✓

### 5. Cordset length (for receptacle with cordset only)

015	0,15 m [5.9 inches]
030	0,30 m [11.81 inches]
050	0,50 m [19.69 inches]
100	1,0 m [39.37 inches]

### 6. Deviation (only for receptacle)

F459	Stand-off receptacle for PCB with PC tail contacts
F312	Reduced flange receptacle
F311	Reduced flange receptacle with safety castle nut
F059	Stand-off Reduced flange receptacle for PCB with PC tail contacts
F058	Stand-off Reduces flange receptacle with safety castle nut

 RoHS compliant

### Examples :

Part number	Description
USB3CFTV6ZN	USB3CFTV serie, plug, aluminum shell with black zinc nickel plating
USB3CFTV72BZF312	USB3CFTV serie, jam nut receptacle with reduced flange, male USB type-C termination, bronze shell
USB3CFTV2G100	USB3CFTV serie, square flange receptacle, aluminium shell with olive drab cadmium plating, 1-meter cordset with USB-C male plug
USB3CFTV7NF059	USB3CFTV serie, jam nut receptacle, aluminium shell with nickel plating, stand-off reduced flange receptacle for PCB.

# HOW TO ORDER - USB3FTV™ PLUG AND RECEPTACLE

1.	2.	3.	4.	5.	6.	7.
Series	Shell type	Coding (for plug with cordset only)	Cordset length (for plug with cordset only)	Backshell (for receptacle only)	Shells material & finish	Type of cable (for plug with cordset only)
USB3FTV	6	A	03		G	CROS

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

### 1. Series

<b>USB3FTV</b>	USB3.2 Gen1 Field Series (USB-A)
----------------	----------------------------------

### 2. Shell type

<b>6</b>	Plug
<b>2</b>	Square flange receptacle
<b>7</b>	Jam nut receptacle

### 3. Coding (avoid for plug without cordset)

<b>A</b>	Coding A
<b>B</b>	Coding B

### 4. Cordset length (for plug with cordset only)

<b>03</b>	0,3 m [11.81 inches]
<b>05</b>	0,5 m [19.68 inches]
<b>10</b>	1,0 m [39.37 inches]
<b>15</b>	1,5 m [59.05 inches]
<b>20</b>	2,0 m [78.74 inches]
<b>25</b>	2,5 m [98.43 inches]
<b>30</b>	3,0 m [118.11 inches]

### 5. Backshell (for receptacle only)

	Without backshell
<b>PE</b>	Metal backshell

### 6. Shell material and finish

<b>G</b>		Olive Drab Cadmium plating
<b>N</b>	Aluminium shell	Nickel plating ✓
<b>ZN</b>		Black Zinc Nickel plating ✓
<b>TZ</b>		Tin Zinc ✓ <b>NEW</b>
<b>BZ</b>	Marine bronze shell ✓	
<b>S</b>	Stainless steel	Passivated ✓

### 7. Type of cable (for plug with cordset only)

<b>CROS</b>	Crossed USB3.0 cable - USB-A plug
<b>STR</b>	Straight USB3.0 cable - USB-A plug
<b>OPEN</b>	Open USB3.0 cable without plug at the end

✓ : RoHS compliant

### Examples :

Part number	Description
USB3FTV6A10GOPEN	USB3FTV, plug, coding A, olive drab cadmium plating, 1,0m cordset with open end
USB3FTV2APEG	USB3FTV, square flange receptacle with metal backshell, coding A, olive drab cadmium plating
USB3FTV7AZN	USB3FTV, jam nut receptacle, coding A, black zinc nickel plating

# HOW TO ORDER - USB3FTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

1.	2.	3.	4.	5.	6.
Series	Shell type	Coding	Cordset length	Shells material & finish	Type of cable
USB3FTV	2S	A	03	G	ACROS

### 1. Series

<b>USB3FTV</b>	USB3.2 Gen1 Field Series (USB-A)
----------------	----------------------------------

### 2. Shell type

Shell type	Receptacle	Sealing
<b>2S</b>	Square flange receptacle	Transversally sealed
<b>2H</b>		Hermetic
<b>7S</b>	Jam nut receptacle	Transversally sealed
<b>7H</b>		Hermetic

### 3. Coding

<b>A</b>	Coding A
<b>B</b>	Coding B

### 4. Cordset length

<b>03</b>	0,3 m [11.81 inches]
<b>05</b>	0,5 m [19.68 inches]
<b>10</b>	1,0 m [39.37 inches]
<b>15</b>	1,5 m [59.05 inches]
<b>20</b>	2,0 m [78.74 inches]
<b>25</b>	2,5 m [98.43 inches]
<b>30</b>	3,0 m [118.11 inches]

### 5. Shell material and finish

Material	Shell	Finish
<b>G</b>	Aluminium shell	Olive Drab Cadmium plating
<b>N</b>		Nickel plating ✓
<b>ZN</b>		Black Zinc Nickel plating ✓
<b>TZ</b>		Tin Zinc ✓ <b>NEW</b>
<b>BZ</b>	Marine bronze shell ✓	
<b>S</b>	Stainless steel	Passivated ✓

### 6. Type of cable

<b>ACROS</b>	Crossed USB3.0 cable - USB-A plug
<b>ASTR</b>	Straight USB3.0 cable - USB-A plug
<b>OPEN</b>	Open USB3.0 cable without plug at the end

✓ RoHS compliant

### Examples :

Part number	Description
USB3FTV2SA03ZNOPEN	USB3FTV, transversally sealed square flange receptacle, coding A, black zinc nickel plating, 0,3m cable with open end
USB3FTV7HA05GASTR	USB3FTV, hermetic jam nut receptacle, coding A, olive drab cadmium plating, 0,5m straight USB3.0 cable with USB-A plug at the end
USB3FTV2HA15NACROS	USB3FTV, hermetic square flange receptacle, coding A, nickel plating, 1,5m crossed USB3.0 cable with USB-A plug at the end



# HOW TO ORDER - UCOM-USB3.2 & TVUCOM-USB3.2

## How to order UCOM- USB3.2 Gen1

1.	2.	3.	4.	5.
Series	Shell type	Contact type (avoid for RP shell type)	Shells material and finish	Backshell type (avoid for receptacle)
UCOM-USB3	PT	C	B	B

1. Series	
UCOM-USB3	µcom for USB3.0

2. Shells type	
PT	Thread version
PP	Plug Push-pull version
L	In line receptacle
R	Panel mount receptacle
RP	PCB receptacle for printed circuit board

3. Contact type (avoid for RP shell type)	
C	Crimp version
S	Solder version

4. Shell material & finish	
B	Black Nickel ✓
G	Brass shell Olive drab cadmium
U	Unplated brass ✓

5. Backshell type (avoid for receptacle)	
B	Banding platform
GA	Gland backshell

✓ : RoHS compliant

## How to order TVUCOM- USB3.2 Gen1

1.	2.	3.	4.	5.	6.	7.	8.
Shell type	Series	Contact type	Shells material and finish	Shell size	Contact gender	Coding	Deviation (only for TV07 shell type)
TV06	UCOM-USB3	C	W	11	P	-	-

1. Shells type	
TV06	Plug
TV07	Receptacle
TVP00	

2. Series	
UCOM-USB3	µcom for USB3.0

3. Contact type (avoid for RP shell type)	
C	Crimp version
S	Solder version
CI	PCB contact (only with TV07 shell type and F059 deviation)

4. Shells material and finish	
W	Olive Drab Cadmium plating
F	Nickel plating ✓
ZN	Aluminium shell Black Zinc Nickel ✓
TZ	Tin zinc ✓ <span style="color: red; font-weight: bold;">NEW</span>
B	Marine bronze shell ✓
K	Passivated stainless steel ✓

5. Shell size	
11	Shells size 11

6. Contact gender	
P	Pin contact
S	Socket contact

7. Coding			
	Coding N	C	Coding C
A	Coding A	D	Coding D
B	Coding B	E	Coding E

8. Deviation (only for TV07 shell type)	
F312	Jam nut Reduced flange receptacle with banding platform
F059	Stand off - Jam nut Reduced flange receptacle for PCB (mandatory with CI contact type)

✓ : RoHS compliant

USB3.2  
 USB2.0  
 Cables and cordsets  
 Adapters and access points  
 Rugged electronics  
 Accessories  
 Assembly instructions  
 How to order

# HOW TO ORDER - UCOM-USB3.2 & TVUCOM-USB3.2

## How to order - Special Backshells

1.

2.

3.

Series	Shell material and finish	Backshell type
TVUCOM	W	B

### 1. Series

TVUCOM	Backshell
--------	-----------

### 3. Contact gender

B	Backshell for heatshrink sleeve
G	Backshell for PG gland

### 2. Shells material and finish

W		Olive Drab Cadmium plating
F	Aluminium shell	Nickel plating ✓
ZN		Black Zinc Nickel ✓
TZ		Tin zinc ✓ <b>NEW</b>
B	Marine bronze shell ✓	

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

# HOW TO ORDER - USBFTV™ - PLUG AND RECEPTACLE

1.	2.	3.	4.	5.
Series	Shell type	Backshell (receptacle only)	Back terminations (receptacle only)	Shells material & finish
USBFTV	7	PEM	2	G

### 1. Series

USBFTV	USB2.0 Field Series (USB-A)
--------	-----------------------------

### 2. Shell type

6	Plug
2	Square flange receptacle
7	Jam nut receptacle

### 3. Backshell (receptacle only)

	Without backshell	
PE		Plastic gland
PEM	Metal backshell	Metal gland (back termination 2 only)

### 4. Back terminations (receptacle only)

1	Female USB-A
2	Solder (4 tinned holes)

### 5. Shell material & finish

G		Olive Drab Cadmium plating
N	Aluminium shell	Nickel plating ✓
ZN		Black Zinc Nickel ✓
TZ		Tin Zinc ✓ <b>NEW</b>
BZ		Marine bronze shell ✓
S	Stainless steel	Passivated ✓

✓ : RoHS compliant

### Examples :

Part number	Description
USBFTV6G	USBFTV, plug, olive drab cadmium plating
USBFTV2PE2N	USBFTV, square flange receptacle with metal backshell and plastic gland, solder back termination, nickel plating
USBFTV7PEM2N	USBFTV, jam nut receptacle with metal backshell and metal gland, solder back termination, nickel plating

# HOW TO ORDER - USBFTV™ - TRANSVERSALLY SEALED AND HERMETIC RECEPTACLE

1.	2.	3.	4.	5.	6.	7.	8.	9.
Series	Shell type	Backshell	Sealing type	Coding	Back terminations	Shells material and finish	Cordset lenght	USB Cable end
USBFTV	2	PE	S	A	2	G	03	OPEN

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

### 1. Series

USBFTV	USB2.0 Field Series (USB-A)
--------	-----------------------------

### 2. Shell type

2	Square flange receptacle
7	Jam nut receptacle

### 3. Backshell

	Without backshell	
PE	Metal backshell	Plastic gland
PEM	Metal backshell	Metal gland

### 4. Sealing type

S	Transversally sealed receptacle
H	Hermetic receptacle

### 5. Coding

A	Coding A
B	Coding B

### 6. Back terminations

2	USB2.0 cable
---	--------------

### 7. Shell material & finish

G	Aluminium shell	Olive Drab Cadmium plating
N		Nickel plating ✓
ZN		Black Zinc Nickel ✓
TZ		Tin Zinc ✓ <b>NEW</b>
BZ	Marine bronze shell ✓	
S	Stainless steel	Passivated ✓

### 8. Cordset lenght

03	0,3 m [11.81 inches]
05	0,5 m [19.68 inches]
10	1,0 m [39.37 inches]
15	1,5 m [59.05 inches]
20	2,0 m [ inches]
30	3,0 m [ inches]
40	4,0 m [ inches]

### 9. USB Cable end

A	USB-A plug
OPEN	Open USB2.0 cable without plug at the end

✓: RoHS compliant

### Examples :

Part number	Description
USBFTV2SA2G03OPEN	USBFTV, transversally sealed square flange receptacle, coding A, olive drab cadmium plating, 0,3m USB2.0 cable with open end
USBFTV2PESA2N05A	USBFTV, transversally sealed square flange receptacle with metal backshell and plastic gland, coding A, nickel plating, 0,5m USB2.0 cable with USB-A plug at the end
USBFTV2PEMSA2N03A	USBFTV, transversally sealed square flange receptacle with metal backshell and metal gland, coding A, nickel plating, 0,3m USB2.0 cable with USB-A plug at the end

# HOW TO ORDER - USBFTV™ - ATEX ZONE 2

1.	2.	3.	4.	5.	6.	7.
Series	Shell type	Coding (for receptacle only)	Back terminations (for receptacle only)	Shell material and finish	Cordset length (for receptacle only)	USB Cable end (for receptacle only)
USBFTVX	2S	A	2	G	03	A

### 1. Series

<b>USBFTVX</b>	USB2.0 Field Series (USB-A) for Atex Zone 2
----------------	---

### 2. Shell type

<b>6</b>	Plug	
<b>2S</b>	Square flange receptacle	Transversally sealed
<b>7S</b>	Jamp nut receptacle	

### 3. Coding (for receptacle only)

<b>A</b>	Coding A
<b>B</b>	Coding B

### 4. Back terminations (for receptacle only)

<b>2</b>	USB2.0 cable
----------	--------------

### 5. Shell material & finish

<b>G</b>		Olive Drab Cadmium plating
<b>N</b>	Aluminium shell	Nickel plating ✓
<b>ZN</b>		Black Zinc Nickel ✓
<b>BZ</b>	Marine bronze shell ✓	

### 6. Corset length (for receptacle only)

<b>03</b>	0,3 m [11.81 inches]
<b>05</b>	0,5 m [19.68 inches]
<b>10</b>	1,0 m [39.37 inches]
<b>15</b>	1,5 m [59.05 inches]

### 7. USB Cable end (for receptacle only)

<b>A</b>	USB-A plug
<b>OPEN</b>	Open USB 2.0 cable without plug at the end

✓ : RoHS compliant

### Examples :

Part number	Description
USBFTVX6G	USBFTV for atex zone 2, plug, olive drab cadmium plating
USBFTVX7SA2G03A	USBFTV for atex zone 2, transversally sealed jam nut receptacle, coding A, olive drab cadmium plating, 0,3m USB2.0 cable with USB-A plug at the end
USBFTVX7SA2N03OPEN	USBFTV for atex zone 2, transversally sealed jam nut receptacle, coding A, nickel plating, 0,3m USB2.0 cable with open end



# HOW TO ORDER - USBBFTV - TRANSVERSALLY SEALED RECEPTACLE

1.	2.	3.	4.	5.	6.	7.	8.
Series	Shell type	Backshell	Sealing type	Back terminations	Shells material and finish	Cordset length	USB Cable end
USBBFTV	2	PE	S	2	G	03	A

1. Series	
USBBFTV	USB2.0 Field Series (USB-B)
2. Shell type	
2	Square flange receptacle
7	Jam nut receptacle
3. Backshell	
	Without backshell
PE	Metal backshell
PEM	Metal backshell
	Plastic gland
	Metal gland
4. Sealing type	
S	Transversally sealed receptacle
5. Back terminations	
2	USB2.0 cable

6. Shell material & finish		
G		Olive Drab Cadmium plating
N	Aluminium shell	Nickel plating ✓
ZN		Black Zinc Nickel ✓
TZ		Tin Zinc ✓ <b>NEW</b>
BZ	Marine bronze shell ✓	
S	Stainless steel	Passivated ✓
7. Corset length		
03	0,3 m [11.81 inches]	
05	0,5 m [19.68 inches]	
10	1,0 m [39.37 inches]	
15	1,5 m [59.05 inches]	
8. USB Cable end		
A	USB-A plug	
OPEN	Open USB 2.0 cable without plug at the end	

✓ : RoHS compliant

**Examples :**

Part number	Description
USBBFTV7S2N03A	USBBFTV, transversally sealed jam nut receptacle, nickel plating, 0,3m USB2.0 cable with USB-A plug at the end
USBBFTV2S2G05OPEN	USBBFTV, transversally sealed square flange receptacle, olive drab cadmium plating, 0,5m USB2.0 cable with open end
USBBFTV7S2G10A	USBBFTV, transversally sealed jam nut receptacle, olive drab cadmium plating, 1,0m USB2.0 cable with USB-A plug at the end

USB3.2  
 USB2.0  
 Cables and cordsets  
 Adapters and access points  
 Rugged electronics  
 Accessories  
 Assembly instructions  
 How to order

# HOW TO ORDER - CABLE

Part number	USB	Lenght
<a href="#">191-030943-00</a>	USB3.2 Gen1	300m
<a href="#">190-040567-00</a>	USB2.0	300m

✓ : RoHS compliant

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order**

# HOW TO ORDER - CORDSET

1.	2.	3.	4.	5.
Series	Type	USB3.0 wiring	Lenght	Mandatory
USB3	AA	CROSSED	050	PU HFFR

### 1. Series

<b>USB3</b>	USB3.2 Gen1 Cordset
<b>(No available for µCom-USB3.2 &amp; TVµCom-USB3.2)</b>	
<b>USB2</b>	USB2.0 Cordset

### 2. Shell type

<b>AA</b>	Cordset with overmoldded USB type A plug on each end
-----------	--

### 3. Wiring (USB3.0 cordset only)

<b>CROSSED</b>	Crossed wiring
<b>STRAIGHT</b>	Straight wiring

**Important note:**

- Cordsets are with USB-A plug overmolded on each end.
- To define a crossed or straight USB3.2 Gen1 cordset, please refer to page 81.
- Crossed cordset will have a black overmolding while straight cordset will have a blue overmolding.
- **USB3.2 Gen1 : Exceeded 3m we don't guarantee the performance because cordset is out of standard.**
- **USB2.0 : Exceeded 4,80m we don't guarantee the performance because cordset is out of standard.**

### 4. Lenght

<b>050</b>	0.5 m / 1.64 ft	● ●
<b>100</b>	1 m / 3.28 ft	● ●
<b>150</b>	1.50 m / 4.92 ft	● ●
<b>180</b>	1.80 m / 5.91 ft	● ●
<b>200</b>	2 m / 6.56 ft	● ●
<b>250</b>	2.50 m / 8.2 ft	● ●
<b>300</b>	3 m / 9.84 ft	● ●
<b>350</b>	3.50 m / 11.48 ft	● ●
<b>400</b>	4 m / 13.12 ft	● ●
<b>450</b>	4.5 m / 14.76 ft	● ●
<b>500</b>	5 m / 16.40 ft	● ●
<b>600</b>	6 m / 19.68 ft	● ●
<b>700</b>	7 m / 22.96 ft	● ●
<b>800</b>	8 m / 26.24 ft	●
<b>900</b>	9 m / 29.52 ft	●
<b>1000</b>	10 m / 32.80 ft	●

### 5. Mandatory

<b>PU HFFR</b>	Black polyurethane jacket
----------------	---------------------------

**Examples :**

Part number	Description
USB2AA450PUHFFR	USB2.0 cordset with overmoldded USB type A plug on each end, 4,5m lenght
USB3AACROSSED150PUHFFR	USB3.2 Gen1 cordset with overmoldded USB type A plug on each end, 1,5m lenght with crossed wiring
USB3AASTRAIGHT200PUHFFR	USB3.2 Gen1 cordset with overmoldded USB type A plug on each end, 2,0m lenght with straight wiring



# HOW TO ORDER - COMPOSITE USB3.2 GEN 1 ACCESS POINT

1.	2.	3.	4.	5.
Series	Shell type	USB output	Cordset length	Cordset termination
USB3APSCC	2	2	15	A

USB3.2

1. Series	
USB3APSCC	USB3 Access Point series

USB2.0

2. Shell type	
2	Square flange receptacle
7	Jam nut receptacle

Cables and cordsets

3. USB output	
1	Female - female coupler
2	Cordset termination

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

4. Cordset length (only for cordset termination)		
	Meters	Inch
03	0,3 m	11,82
05	0,5 m	19,69
10	1 m	39,38
15	1,5 m	59,06
18	1,8 m	70,87
20	2 m	78,75

5. Cordset termination (only for cordset termination)	
A	USB3 Type-A plug

**Examples :**

Part number	Description
USB3APSCC7210A	USB3 Access Point series, jam nut receptacle, cordset termination, 1 meter cordset length, USB Type-A plug.
USB3APSCC2120	USB3 Access Point series, square flange receptacle, female - female coupler, 2 meters cordset length.

# HOW TO ORDER - USB3CFTV MEMORY KEYS

1.	2.	3.	4.
Series	Capacity	Material and plating	Protective cap
USB3F TV KEY 6	32	G	

### 1. Series

USB3F TV KEY 6	USB3 FTV Memory Keys
----------------	----------------------

### 2. Capacity

16	16 Gb
32	32 Gb
64	64 Gb
128	128 Gb
256	256 Gb

### 3. Material and plating

	Shell material	Shell finish
G	Aluminum	Olive drab cadmium
N		Nickel ✓
ZN		Black zinc nickel ✓
TZ		Tin Zinc ✓ 
BZ	Marine bronze shell ✓	

### 4. Protective cap

	Without Cap
CAP	With Cap

✓ : RoHS compliant

### Examples :

Part number	Description
USB3FTVKEY6128TZ	USB3FTV memory key, 128 Gb capacity, tin zinc plating.
USB3FTVKEY632GCAP	USB3FTV memory key, 32 Gb capacity, olive drab cadmium plating, with protective cap.
USB3FTVKEY6256N	USB3FTV memory key, 256 Gb capacity, nickel plating.



# HOW TO ORDER - ROK - RUGGED OVAL KEY

1.	2.	3.
Series	Capacity	Plating
USB3FKEY	16	B

1. Series	
USB3FKEY	ROK - Rugged Oval Key

2. Shell type	
16	16 Gb
32	32 Gb
64	64 Gb
128	128 Gb
256	256 Gb

3. Series	
B	Black painting

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order

**Examples :**

Part number	Description
USB3FKEY16B	Rugged Oval Key, 16Gb capacity, black painting
USB3FKEY64B	Rugged Oval Key, 64Gb capacity, black painting
USB3FKEY256B	Rugged Oval Key, 256Gb capacity, black painting

# HOW TO ORDER - USB3FTV™ USB3.2 GEN 1 AMPLIFIER

1.	2.	3.	4.	5.
Series	Shell type	Coding (for plug with cordset only)	Material and platings	Cordset length (for plug with cordset only)
CA USB3F TV	2	A	G	30

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

1. Series	
CA USB3F TV	USB3.2 Gen1 Field Series copper amplifier (USB3-A)

2. Shell type	
2	Square flange receptacle
7	Jam nut receptacle

3. Coding (for plug with cordset only)	
A	Coding A
B	Coding B

4. Material and platings		
	Shell material	Shell plating
G	Aluminum	Olive drab cadmium
N		Nickel ✓
ZN		Black zinc nickel ✓
TZ		Tin Zinc ✓ 
BZ	Bronze ✓	

5. Cordset length with plug USB3 type A	
30	3 m [118,11]
40	4 m [157,48]
50	5 m [196,85]
60	6 m [236,22]
70	7 m [275,59]
80	8 m [314,96]

✓ : RoHS compliant

# HOW TO ORDER - STANDARD PROTECTIVE CAP

1.	2.	3.	4.	5.
Series	Connector type	Rope type	Shells material and finish	Deviation
USBFTV C	7		G	F057

### 1. Series

<b>USBFTVC</b>	USBFTV standard protective cap ( size 15 )
<b>USB3CFTVC</b>	USB3CFTV standard protective cap ( size 11 )

### 2. Connector type

<b>6</b>	Plug
<b>2</b>	Square flange receptacle
<b>7</b>	Jam nut receptacle

### 3. Rope type

	Nylon cord
<b>M</b>	Metallic chain
<b>MR</b>	Stainless Steel rope - Transparent teflon jacket
<b>BMR</b>	Stainless Steel rope - Black teflon jacket

### 4. Shell material and finish

<b>N</b>	Nickel plating ✓
<b>G</b>	Olive drab cadmium
<b>ZN</b>	Black zinc nickel plating ✓

### 5. Deviation

<b>F057</b>	Reduced flange ring
-------------	---------------------

✓ : RoHS compliant

### Examples :

Part number	Description
USBFTVC2N	USBFTV protective cap for square flange receptacle, nylon cord, nickel plating
USBFTVC2MRN	USBFTV protective cap for square flange receptacle, stainless steel rope with teflon jacket, nickel plating
USBFTVC6ZN	USBFTV protective cap for plug, nylon cord, black zinc nickel plating

# HOW TO ORDER - STANDARD PROTECTIVE CAP - TVUCOM-USB3.2

1.	2.	3.	4.	5.	6.	7.
Series	Protection cap type	Wire type	Connector type	Material and finish	Corresponding connector shell size	Deviation
B	EC	N	TV	W	11	-

USB3.2

USB2.0

Cables and cordsets

Adapters and access points

Rugged electronics

Accessories

Assembly instructions

How to order

<b>1. Series</b>		<b>5. Material and finish</b>	
B	Cap	W	Olive Drab Cadmium plating on aluminium (175°C)
<b>2. Protection cap type</b>		ZN	Black zinc nickel plated on aluminium (175°C) ✓
EC	For square flange receptacle	F	Electroless nickel plated on aluminium (200°C) ✓
ER	For jam nut receptacle	B	Marine bronze (200°C) ✓
F	For plug	Z	Green zinc cobalt plated on aluminium (175°C) ✓
<b>3. Wire type</b>		<b>6. Corresponding connector shell size</b>	
-	Blank for metallic chain	11	Shell size 11
N	Nylon cord	<b>7. Deviation (only for Jam nut Reduced flange receptacle)</b>	
R	Jacketed stainless steel rope	F057	For Jam nut Reduced flange receptacle
RO	Jacketed stainless steel rope with washer end (only for plug)		
<b>4. Connector type</b>			
TV Cap			

✓: RoHS compliant

# HOW TO ORDER - SILICONE PROTECTIVE CAP - TVUCOM-USB3.2

1.	2.	3.	4.
Series	Protection cap type	Wire type	Shell size
RC	00	N	11

### 1. Series

RC	Rubber caps
----	-------------

### 2. Protection cap type

00	For square flange receptacle
07	For jam nut receptacle

### 3. Wire type

N	Nylon cord
---	------------

### 4. Shell size

11	Shell size 11
----	---------------

- USB3.2
- USB2.0
- Cables and cordsets
- Adapters and access points
- Rugged electronics
- Accessories
- Assembly instructions
- How to order









# NOTES

A series of horizontal dotted lines for taking notes, spanning the width of the page.

# ABOUT AMPHENOL

Founded in 1932, **Amphenol** is one of the largest manufacturers of interconnect products in the world. The company designs, manufactures, and markets electrical, electronic, and fiber optic connectors, interconnect systems, and coaxial and specialty cables.

**Amphenol** has a diversified presence as a leader in high growth areas of the interconnect industry and provides solutions for customers in the automotive, broadband, industrial, information technology and data communications, military and aerospace, mobile devices, and mobile networks markets.

More info on [www.amphenol.com](http://www.amphenol.com)

**Amphenol**  
ENABLING THE ELECTRONICS REVOLUTION

## Europe

FRANCE	Amphenol AIR LB	2 rue Clément Ader, ZAC de Wé - 08110 Carignan	+33 3 24 22 78 49
FRANCE	Amphenol SEFEE	Z.I. des Cazes – BP243 - 12402 Saint-Affrique Cedex	+33 5 65 98 11 00
GERMANY	Amphenol AIR LB GMBH	Am Kleinbahnhof 4 - 66740 Saarlouis	+49 6831 981 00
ITALY	Amphenol EUROPEAN SALES OPERATIONS	Via Barbaiana n.5 - 20020 Lainate - Milano	+39 293 254 214
UNITED KINGDOM	Amphenol INVOTEC	Unit 1-3, Hedging Lane Industrial Estate, Dosthill - Tamworth, B77 5HH	+44 1827 263 000
UNITED KINGDOM	Amphenol IONIX SYSTEMS	Prospect House, Taylor Business Park, Risley, Warrington, WA3 6HP	+44 1 942 685 200
UNITED KINGDOM	Amphenol LTD	Thanet Way, Whitstable - KENT, CT53JF	+44 1227 773 200
UNITED KINGDOM	Amphenol MARTEC	St Augustines Business Park, Swalecliffe Whitstable - Kent CT5 2QJ	+44 1227 793 733

## North America

CANADA	Amphenol CANADA	605 Milner avenue - Toronto, Ontario	+1 416 291 0647
USA	Amphenol AEROSPACE OPERATIONS	40-60 Delaware street - Sidney, NY 13838	+1 800 678 0141
USA	Amphenol BORISH TECHNOLOGIES	4511 East Paris AVE - Grand Rapids, MI 49512	+1 616 554 9820
USA	Amphenol FSI	1300 Central Expwy N, Suite 100 - Allen, TX 75013	+1 214 547 2400
USA	Amphenol GRIFFITH ENTERPRISES	6000 East Coury Drive - Cottonwood, AZ 86326	+1 928 634 3685
USA	Amphenol NEXUS TECHNOLOGIES	50 Sunnyside Avenue - Stamford, CT 06902	+1 203 327 7300
USA	Amphenol PCD	72 Cherry Hill Drive - Beverly, MA. 01915	+1 978 624 3400
USA	Amphenol PRINTED CIRCUIT	Board Technology, 91 Northeastern Boulevard - Nashua, NH 03062	+1 603 324 4500
USA	Amphenol SV MICROWAVE	2400 Centrepark West Drive - West Palm Beach, FL	+1 561 840 1800
USA	Amphenol TIMES MICROWAVE	358 Hall Avenue - Wallingford, CT 06492	+1 800 867 2629

## Asia

CHINA	Amphenol PCD CO.	Building 21, 1 <sup>st</sup> Liao Keng Industrial Zone, Shi Yan Street - Bao An District - Shenzhen 518108	+86 755 8173 8000/8286
INDIA	Amphenol INTERCONNECT INDIA	105 Bhosari Industrial Area - Pune 411 026	+91 20 27120363
JAPAN	Amphenol JAPAN	471-1, Deba, Ritto-City - Shiga 520 3041	+81 77 553 8501
KOREA	Amphenol DAESHIN	558 SongNae-Dong SoSa-Gu, Bucheon-city, Kyunggi-Do - 420-130	+81 32 610 3830/3845
SINGAPORE	Amphenol EAST ASIA	26/F, Railway Plaza, 39 Chatham Road South, Tsim Sha Tsui, Kowloon, Hong Kong	+65 6294 2128

## Other Areas

AFRICA	Amphenol AFRICA	30 Impala Rd - Sandton 2146	+27 82 410 5179
ARGENTINA	Amphenol ARGENTINA	Av. Callao 930 2do piso Oficina B "Plaza" C1023 - AAP Buenos Aires	+54 11 4815 6886
AUSTRALIA	Amphenol AUSTRALIA PTY	2 Fiveways Blvd., Keysborough - Melbourne - Victoria 3173	+61 3 8796 8888
BRAZIL	Amphenol DO BRAZIL	Rua Diogo Moreira, 132, 20 andar, rooms 2001-2-3	+55 11 3815 1003
ISRAEL	Amphenol BAR-TEC	3 Hagavish Street, K fir-Barkan Bldg. East Industrial Zone - Kfar-Sava, 44102	+972 9 764 4100
MEXICO	Amphenol OPTIMIZE	Carretera Internacional Km 6.5, Col. Parque Industrial, Nogales, Sonora, C.P. 84094	+52 631 311 160
NEW ZEALAND	Amphenol PHITEK	Level 4, 2 Kingdon Street, Newmarket, Auckland 1023	+64 9 524 2984
TURKEY	Amphenol TURKEY	Sun Plaza 15 Kat: 15 Masiak Hah. Bilim Sok. No.5 - Sisli/Istanbul, 34398	+90 212 367 92 19

# Amphenol SOCAPEX



## Amphenol Socapex

948, promenade de l'Arve BP29

74311 Thyez Cedex - France

+33 (0)4 50 89 28 00

[contact@amphenol-socapex.fr](mailto:contact@amphenol-socapex.fr)

[www.amphenol-socapex.com](http://www.amphenol-socapex.com)



## For Technical Support

+33 (0)4 50 89 28 49

[technicalsupport@amphenol-socapex.fr](mailto:technicalsupport@amphenol-socapex.fr)



## To buy our products

+33 (0)4 50 90 28 00

[contact@amphenol-socapex.fr](mailto:contact@amphenol-socapex.fr)

[www.amphenol-socapex.com/amphenol/sales](http://www.amphenol-socapex.com/amphenol/sales)

Request a quote online at [www.amphenol-socapex.com/quotation\\_request](http://www.amphenol-socapex.com/quotation_request)



## Documentation

[www.amphenol-socapex.com/documentation](http://www.amphenol-socapex.com/documentation)

To order a paper version of our catalogs, send an e-mail to [communication@amphenol-socapex.fr](mailto:communication@amphenol-socapex.fr)

NEW

Check our product  
inventory



Product Selectors  
& 3D Files



[www.amphenol-socapex.com](http://www.amphenol-socapex.com)

Follow Amphenol Socapex on social media :



This catalog uses paper from managed forests, PEFC & FSC labels, and is printed by a printer certified "Imprim'Vert®"

We reserve the right to modify our products in any way we deem necessary.  
Any duplication is prohibited, unless approved in writing.

Designed by Amphenol Socapex  
DOC-001035-ANG - May 2025