


Data Sheet | Item Number: 787-1632/000-070

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact

<https://www.wago.com/787-1632/000-070>

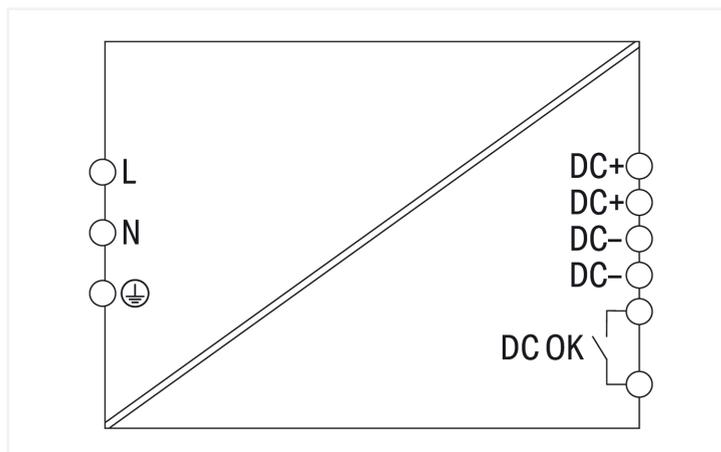

Similar to illustration

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- DC OK contact
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per UL 60950-1; PELV per EN 60204
- Coated PCBs (with Bectron PL 1104 or Voltatex 2010), resistant to flowing mixed gas per ISA S71.04:1985, G3 Group A

Technical data

Input	
Phases	1
Nominal input voltage $U_{i, nom}$	1 x 100 ... 240 VAC
Input voltage range	1 x 85 ... 264 VAC; 100 ... 300 VDC
Input voltage derating	-2.5 %/V (< 100 VAC); -1 %/V (< 130 VDC)
Nominal mains frequency range	44 ... 66 Hz; 0 Hz
Input current I_i	≤ 1.25 A (230 VAC); ≤ 2.74 A (100 VAC)
Discharge current	≤ 1 mA
Inrush current	≤ 30 A
Power factor correction (PFC)	Active
Mains failure hold-up time	≥ 17 ms (230 VAC); ≥ 15 ms (100 VAC)

Output	
Nominal output voltage $U_{o, nom}$	24 VDC (SELV)
Output voltage range	23 ... 28.5 VDC (adjustable)
Default Setting	DC 24 V
Nominal output current $I_{o, nom}$	10 A (24 VDC)
Nominal output power	240 W
Deviation	≤ 1 %
Residual ripple	≤ 50 mV (peak-to-peak)
Current limitation	$1.1 \times I_{o, nom}$ (typ.)
Overload behavior	Constant current
TopBoost	See instruction leaflet

Signaling and communication	
Signaling	1 x DC OK LED (green) 1 x DC OK contact (make contact; max. 30 VAC/DC; 1 A)
Operation status indicator	Green LED (U_o)

Efficiency/power losses	
Power loss P_i	≤ 6.6 W; ≤ 24.4 W (230 VAC; nominal load)
Power loss (max.) $P_{1(max)}$	31.3 W (100 VAC / 24 VDC; 10 A)
Efficiency (typ.)	91 %

Circuit protection	
Internal fuse	T 6.3 A / 250 VAC
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: 10 A, 16 A; Tripping characteristic: B or C

Safety and protection

Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	0.7 kVDC
Protection class	I
Protection type	IP20; Per EN 60529
Protective coating	Coated PCBs
Resistance to reverse feed	≤ 35 VDC
Oversvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Oversvoltage protection; secondary	Internal protective circuit ≤ 40 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection data

Connection 1

Connection type	Input/output/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	55 mm / 2.165 inches
Height	127 mm / 5 inches
Depth from upper-edge of DIN-rail	172 mm / 6.772 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Fire load	0.301 MJ
Weight	1140 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-5 %/K (> 60 °C, 196 ... 264 VAC); -2.5 %/K (> 50 °C, 85 ... 195 VAC)
Climatic category	3K3 (per EN 60721)

Standards and specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 UL 60950-1 UL 508

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143667944
Customs tariff number	85044083900

Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 8.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals	Declarations of conformity and manufacturer's declarations
-------------------	--



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-1632/000-070



Documentation

Bid Text			
787-1632/000-070	04.07.2019	xml 7.32 KB	
787-1632/000-070	04.06.2019	docx 21.00 KB	

Instruction Leaflet			
Primär getaktete Stromversorgung;	24.07.2017 04.03.2022	pdf 1622.10 KB	

CAD/CAE-Data

CAD data	
2D/3D Models 787-1632/000-070	

CAE data	
EPLAN Data Portal 787-1632/000-070	

Engineering-Software

Configuration and Commissioning Software			
WAGO Line Length Calculation	1.3.5 09.12.2019	exe 329.50 KB	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Mounting adapter

1.1.1.1 DIN-rail adapter



[Item No.: 787-897/000-010](#)

Carrier rail adapter made of zinc die-cast; horizontal mounting of 787-16xx (TS35)

1.1.2 Tool

1.1.2.1 Operating tool



[Item No.: 210-769](#)

SCREWDRIVER; green