


Data Sheet | Item Number: 787-976

Transformer power supply; Input voltage: 230 VAC; Output voltage: 12 ... 24 VAC;
Output power: 63 VA

<https://www.wago.com/787-976>

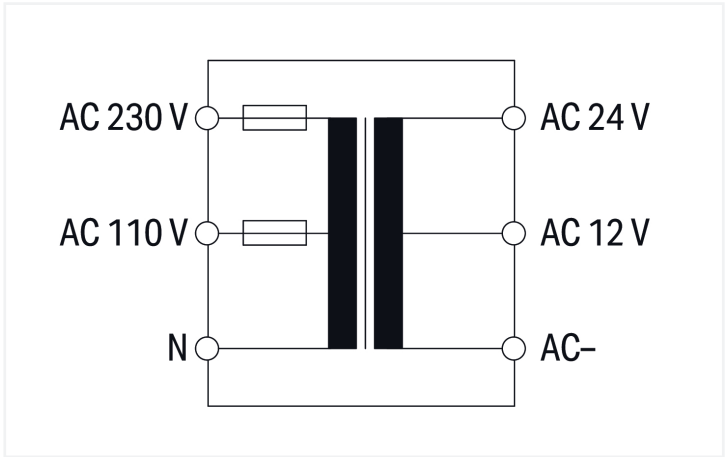

Features:

- Maintenance-free, DIN-rail-mount safety transformer for 12 / 24 VAC
- Center tap-off modules provide variable input/output voltage.
- Enables brief performance peaks
- Peak output power of 70 VA for 1 min/h

Technical data

Input		Output	
Phases	1	Nominal output voltage $U_{o\ nom}$	12 / 24 VAC
Nominal input voltage $U_{i\ nom}$	1 x 115 VAC; 230 VAC	Nominal output current $I_{o\ nom}$	5.2 A (12 VAC); 2.6 A (24 VAC)
Input voltage range	1 x 0 ... 230 VAC	Nominal output power	63 VA
Nominal mains frequency range	50 ... 60 Hz	Load regulation	$\leq 5\ %$
		Overload behavior	Safety fuse in the primary circuit

Efficiency/power losses	
Power loss P_l	$\leq 0.8\ W$

Circuit protection	
Internal fuse	T 2 A / 250 VAC; T 1.6 A / 250 VAC

Safety and protection	
Isolation voltage (AC)	4.2 kVAC
Protection class	II
Protection type	IP20; Per EN 60529
Overvoltage category	III
Pollution degree	2
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	No
Series operation	Yes (with identical power supply)



Connection data

Connection 1	
Connection type	Input/output
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 236 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	144 mm / 5.669 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	54 mm / 2.126 inches

Mechanical data

Housing design	DIN-rail-mount enclosure
Mounting type	DIN-35 rail

Material data

Fire load	0 MJ
Weight	1200 g

Environmental requirements

Ambient temperature (operation)	-25 ... +55 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	≤ 90 %
Climatic category	3K3 (per EN 60721; except for low air pressure)

Standards and specifications

Conformity marking	CE
Standards/specifications	UL 5085 EN 61558-2-6

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	CN
GTIN	4055143487399
Customs tariff number	85043129900



Product Classification	
UNSPSC	39121004
eCl@ss 10.0	27-04-07-03
eCl@ss 9.0	27-04-07-03
ETIM 9.0	EC002541
ETIM 8.0	EC002541
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption
SCIP notification number (Bulgaria)	36f2e601-e1fa-4685-aae5-a2cf8816205d
SCIP notification number (Czech Republic)	bb350a9e-0166-4369-bbaf-2507f6407afe

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
UL Underwriters Laboratories Inc.	UL 5085-1/-2	E488057

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 787-976	

Documentation			
Bid Text			Instruction Leaflet
787-976	19.02.2019	xml 4.89 KB	
787-976	24.11.2016	doc 33.00 KB	

Instruction Leaflet			
Sicherheitstransforma- tor	V 1.1.0	pdf 2287.75 KB	



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-976	EPLAN Data Portal 787-976
	
	ZUKEN Portal 787-976
	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-831 Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white	Item No.: 210-832 Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white
--	--

1.1.2 Tool
1.1.2.1 Operating tool



Item No.: 210-720 Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured
