

### Features

- Wide voltage input 85-305VAC/120-430VDC
- DIP
- Operating temperature range: -40°C~+85°C
- Isolation voltage 3000/4000VAC 5mA 1Minute
- Internal SMD design
- High flame retardant plastic shell
- Heat dissipation mode: natural air cooling
- It has good shielding anti-interference performance and electromagnetic compatibility, lightning protection, output over current, short circuit protection, overheat protection, self-recovery and other functions

### Product Picture




### Patent Protection



EMC-EN55032  
EN55035  
LVD-EN62368

### Dimensions

#### AC220S\_\_ZDK-60W Series Dimensions

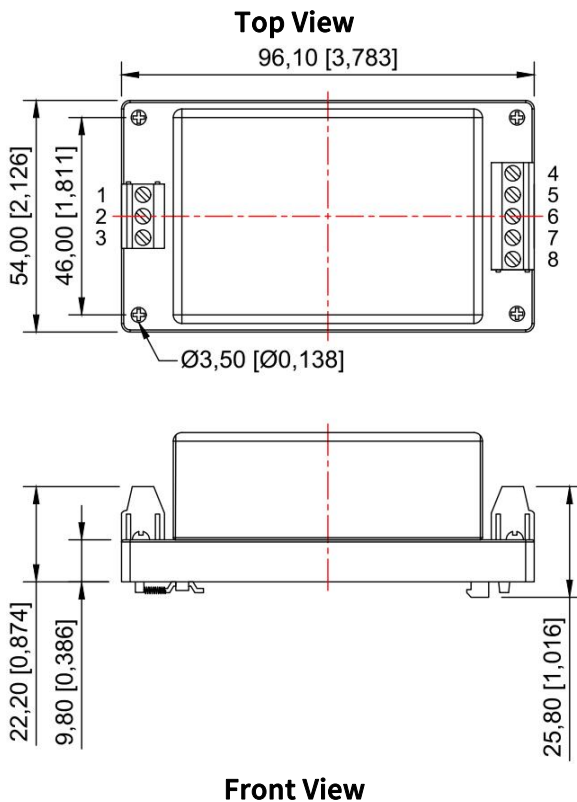

Pin mode	
Pin	Function
1	FG
2	AC(N)
3	AC(L)
4	0V
5	NC
6	NC
7	NC
8	+XXVDC

#### Note:

Size unit: mm[inch]

Unmarked tolerance:  $\pm 0.25$  [ $\pm 0.01$ ]


Wire bond strength: 24-12 AWG

Tightening torque: Max 0.4 N-m

Guide rail: TS35

The device layout is for reference only.

AC220S\_\_ZD-50W Series Dimensions

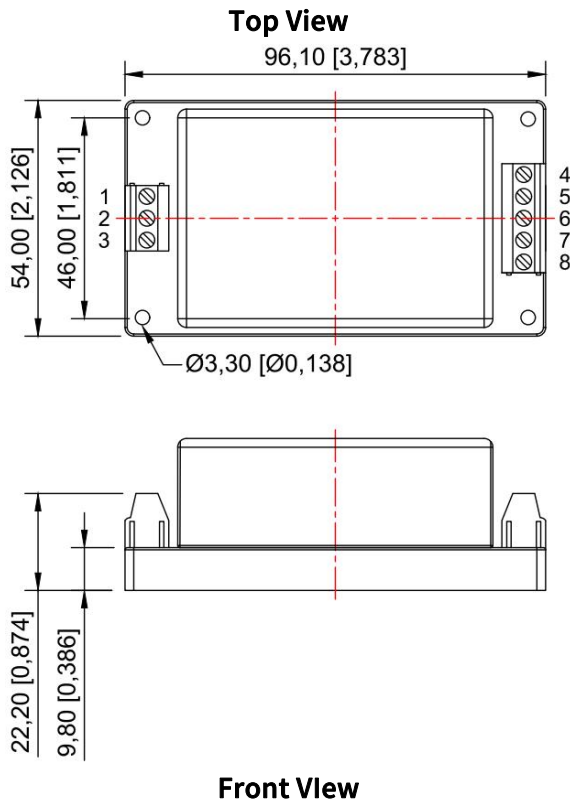

Pin Mode	
Pin	Function
1	FG
2	AC(N)
3	AC(L)
4	0V
5	NC
6	NC
7	NC
8	+XXVDC

Note:  
Size unit: mm[inch]  
Unmarked tolerance:  $\pm 0.25[\pm 0.01]$   
Wire bond strength: 24-12 AWG  
Tightening torque: Max 0.4 N-m  
The device layout is for reference only.

Application

Industrial control and remote DC power supply system, switching system, AC/DC(5V products), railway communication, communication interface converter, cellular telephone, semiconductor laser, display screen, monitoring equipment, petrochemical, portable instrument, medical instrument, automatic control device, burglar alarm, handheld instrument, digital circuit, IC card meter, air conditioning computer controller, LED production Products, digital products, power adapters, etc.

Selection Guide

Model	Input(V)	Output (V $\pm 2\%$ )	Current(mA)	Efficiency (%)	Isolation (VAC)	Weight (g $\pm 0.5$ )	Certification
AC220S05ZD(K)-60W	85-305VAC (120-430VDC)	5	9000	86	3000/4000		
AC220S09ZD(K)-60W		9	5556	88	3000/4000		
AC220S12ZD(K)-60W		12	4167	89	3000/4000		
AC220S15ZD(K)-60W		15	3333	89	3000/4000		
AC220S24ZD(K)-60W		24	2083	89	3000/4000		

Note: The company for customers to customize any input and output module power supply, if you have special needs, please call our company, unless otherwise specified, input =Vi, the characteristics of the module power supply should meet the requirements of Table 1, and applicable to the full temperature range (-40°C $\leq$ Tc $\leq$ 85°C)

Mechanical Specifications

Size	96.10 x 54.00 mm
------	------------------

**Electrical Specifications**


Specifications	Symbol	Conditions $V_i, -40^{\circ}\text{C} \leq T_c \leq 85$ (Unless otherwise specified)	Min	Min	Unit
Output Voltage	$V_o$	Full Load	$V_o-2\%$	Full Load	V
Output Current	$I_{omax}$	—	—	—	A
Output Ripple Voltage	$V_{p-p}$	Full Load, $V_i$ , BW=20MHz, Normal Temperature	100	Full Load, $V_i$ , BW=20MHz, Normal Temperature	mV
Output Noise Voltage	$V_{p-p}$	Full Load, $V_i$ , BW=20MHz, Normal Temperature	120	Full Load, $V_i$ , BW=20MHz, Normal Temperature	mV
Voltage Regulation	$S_v$	$V_{imin}, V_i, V_{imax}$ , Full Load	—	$V_{imin}, V_i, V_{imax}$ , Full Load	%
Load Adjustment	$S_i$	$V_i, I_o=(10\% \sim 100\%)I_{omax}$	—	$V_i, I_o=(10\% \sim 100\%)I_{omax}$	%
Insulation Resistance	$R_l$	Input-output, Insulation Voltage: 500VDC	100	Input-output, Insulation Voltage: 500VDC	M $\Omega$

**General Specifications**


EMC Specifications	Magnetic Field Sensitivity Test	GB6833.2-87
	Electrostatic Discharge Sensitivity Test	GB6833.3-87
	Radiation Sensitivity Test	GB6833.5-87
	Conduction Sensitivity Test	GB6833.6-87
Temperature Drift	$\leq \pm 0.03\%/^{\circ}\text{C}$	
Storage Temperature	$-40^{\circ}\text{C} \sim 125^{\circ}\text{C}$	
Input Frequency	47Hz~63Hz	
Humidity	20%~95%RH	
Leakage Current	5mA(max)	
MTBF	$> 500000\text{H}$	

**Typical Specifications Curves**


**Temperature Chart**

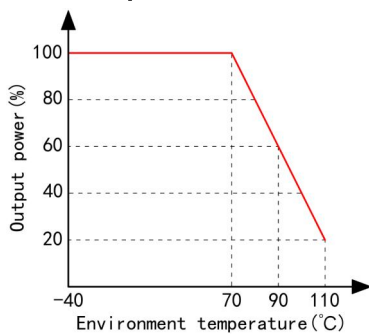


**Input voltage derating curve**

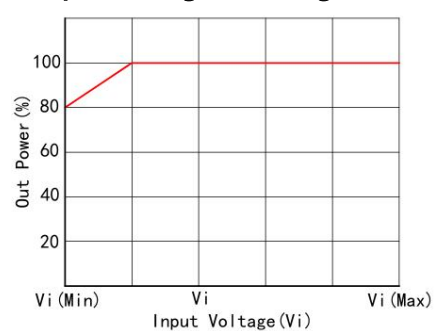

**Efficiency/Load Graph**

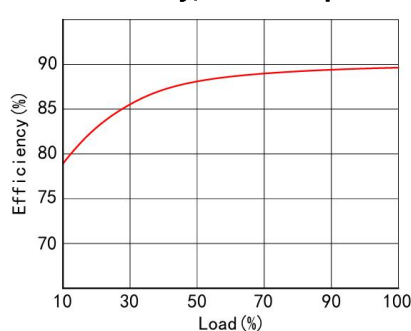


**Efficiency/Load Graph**

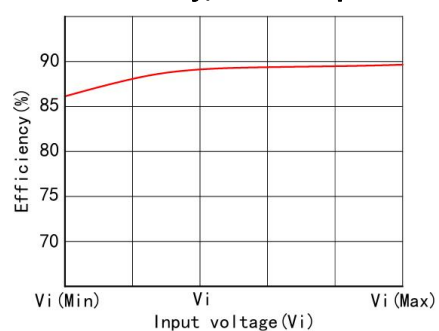

**Typical Application**

**Design Reference**

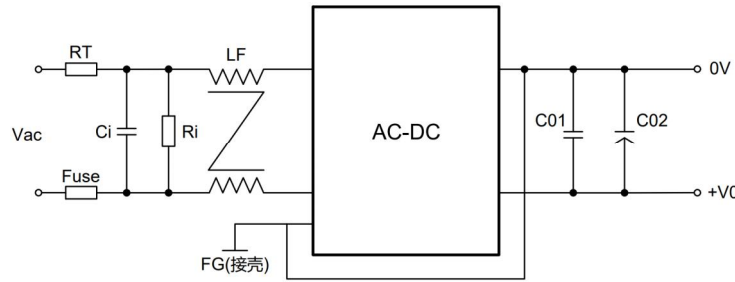

**Recommendation Test**

Filter: In some circuits that are sensitive to noise and ripple, an external filter capacitor can be connected to the DC/DC input and output terminals to reduce the impact of ripple on the system, but the value of the filter capacitor should be appropriate, if the capacitor is too large, it is likely to cause startup problems, for each output, under the condition of ensuring safe and reliable operation, the maximum capacitance of the filter capacitor can be referred to the external capacitance table. In order to obtain very low ripple, an "LC" filter network can be connected to the input and output end of the DC/DC converter, so that the filtering effect will be better, and it should be noted that the size of the inductance value and the frequency of the "LC" filter network should be staggered from the frequency of the DC/DC module power supply to avoid mutual interference. For each output, under safe and reliable working conditions, the recommended capacitive load value is shown in (Table 1).

Input voltage (Vin+)	C01	C02	RT	Ci(UF)	Ri(KR)	LF(mH)
85-305V	104M/50V	1000uF/16V	8D-7	0.1/275V	560	8-10


Recommended output max capacitive load value table (Table 1)

Note: Please note that the main grounding of the output and the grounding of the load are connected to the ground, so that even if the product has problems, it will not cause harm to the human body. The ground requirements for the auxiliary roads are isolated and can be grounded without grounding.

**Precautions**

**Package**

This series of modules are packed in shockproof and anti-static foam.

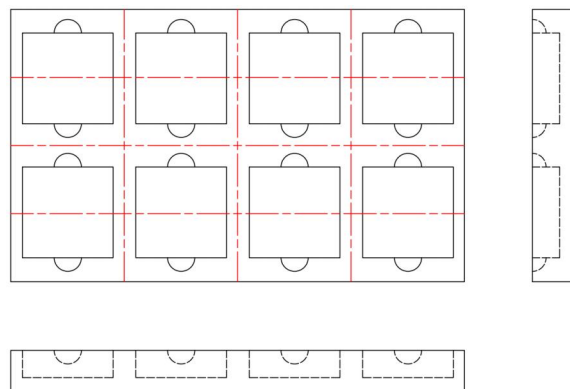

### **Transport**

The package containing the module is allowed to be transported by any means of transport, which should avoid direct rain and snow and mechanical damage.

### **Storage**

The module should be stored in a warehouse where the ambient temperature is -40 degrees ~ 125 degrees, the relative humidity is 20%~95%, and the surrounding environment is free from acidic, alkaline and other harmful gases.

Note: The above are the performance indicators of the product series listed in this manual. Some indicators of non-standard products may exceed the above requirements, so if there is any inconsistency between the manual and the product specification documents, please refer to the specification documents. If you have special needs, please contact us directly.