


- Industrial AC/DC power supplies for cost sensitive applications in 4" x 3" package
- Universal input range 90 to 264 VAC
- Operating temperature range: -20°C to +70°C
- Protection class II prepared
- Internal EN 55032 class B filter
- Short circuit, overvoltage and overload protection
- IEC/EN/UL 62368-1 safety approvals
- Compliance to EN 61000-3-2
- 3-year product warranty

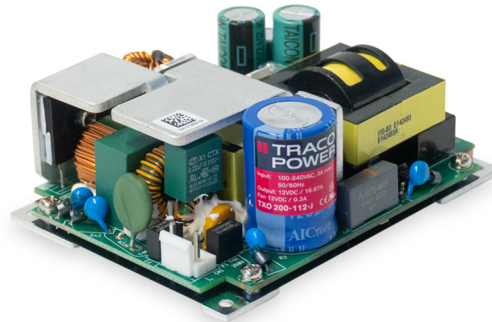

The TXO 200 is a compact 200 Watt AC/DC open frame module with reinforced I/O isolation designed for a wide range of cost sensitive applications. A high efficiency of 90% allows the TXO 200 to deliver 150 Watt up to +50°C with convection cooling and 200 Watt up to +50°C with forced air cooling, while going up to +70°C with derating. It comes with an active power factor correction and EMC characteristics dedicated for applications in industrial/automation and test & measurement fields making these power supplies an ideal solution for various industrial and cost sensitive applications.

Models

Order Code	Output Power max.	Output Voltage nom.	Output Current max. (Forced air cooling)	Output Current max. (Natural convection)	Efficiency typ.
TXO 200-112-J	200 W	12 VDC	16'670 mA	11'670 mA	89 %
TXO 200-115-J		15 VDC	13'340 mA	9'340 mA	89 %
TXO 200-124-J		24 VDC	8'340 mA	6'250 mA	90 %
TXO 200-148-J		48 VDC	4'170 mA	3'125 mA	90 %

Options

TCI-AC1	- Optional Cable: www.tracopower.com/overview/tci-ac1
TXO 300-DC	- Optional Cable: www.tracopower.com/overview/txo300-dc
on demand (backorder with MOQ non stocking item)	- Optional model with 36 VDC and 5'560 mA - Optional model with 56 VDC and 3'580 mA

Note - Total output power must not exceed 150 W for convection cooling applications

Input Specifications

Input Voltage	- AC Range	Operational Range: 90 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range)
	- DC Range	Operational Range: 120 - 370 VDC (Designed for, no certification) Polarity: irrelevant
Input Frequency		Operational Range: 47 - 63 Hz Certified: 50/60 Hz
Power Consumption	- No load & Vin = 230 VAC	5'000 mW max.
	- No load & Vin = 115 VAC	8'500 mW max.
Input Current	- Full load & Vin = 230 VAC	1'100 mA max.
	- Full load & Vin = 115 VAC	2'100 mA max.
Input Inrush Current	- At 230 VAC	110 A max.
	- At 115 VAC	65 A max.
Power Factor	- At 230 VAC	0.9 min. (Active Power Factor Correction)
	- At 115 VAC	0.9 min. (Active Power Factor Correction)
Input Protection		T 4.0 A / 250 VAC (Internal Fuse in L & N)
Recommended Input Fuse		4'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.)

Output Specifications

Voltage Set Accuracy		±3% max.
Regulation	- Input Variation (Vmin - Vmax)	1% max.
	- Load Variation (10 - 100%)	3% max.
Ripple and Noise (20 MHz Bandwidth)	12 VDC model:	200 mVp-p max. (w/ 22 µF ELCO 0.1 µF MLCC)
	15 VDC model:	200 mVp-p max. (w/ 22 µF ELCO 0.1 µF MLCC)
	24 VDC model:	240 mVp-p max. (w/ 22 µF ELCO 0.1 µF MLCC)
	36 VDC model:	360 mVp-p max. (w/ 22 µF ELCO 0.1 µF MLCC)
	48 VDC model:	480 mVp-p max. (w/ 22 µF ELCO 0.1 µF MLCC)
	56 VDC model:	560 mVp-p max. (w/ 22 µF ELCO 0.1 µF MLCC)
Capacitive Load	12 VDC model:	20'000 µF max.
	15 VDC model:	16'000 µF max.
	24 VDC model:	8'000 µF max.
	36 VDC model:	4'700 µF max.
	48 VDC model:	2'600 µF max.
	56 VDC model:	2'000 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.05 %/K max.
Hold-up Time	- At 230 VAC	10 ms min.
	- At 115 VAC	10 ms min.
Start-up Time	- At 230 VAC	3'500 ms max.
	- At 115 VAC	3'500 ms max.
Start-up Overshoot Voltage		10% max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		110 - 200% of Iout max.
Oversvoltage Protection		105 - 150% of Vout nom.
Transient Response	- Response Deviation	5% typ. / 8% max. (50% to 75% Load Step)
	- Response Time	1'000 µs typ. / 2'000 µs max. (50% to 75% Load Step)

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Safety Specifications

Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	www.tracopower.com/overview/txo200
Protection Class	See application note:	Class I & II (Prepared): Reinforced Insulation www.tracopower.com/overview/txo200
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI (Emissions)	- Conducted Emissions	EN 55032 class A (internal filter) EN 55032 class B (internal filter) FCC 47 Part 15 class A (internal filter) FCC 47 Part 15 class B (internal filter)
	- Radiated Emissions	EN 55032 class A (internal filter) FCC 47 Part 15 class A (internal filter)
	- Harmonic Current Emissions	EN 61000-3-2, class A
	- Voltage Fluctuations & Flicker	EN 61000-3-3
EMS (Immunity)	- Electrostatic Discharge	EN 55035 (Multimedia) Air: EN 61000-4-2, ± 8 kV, perf. criteria A Contact: EN 61000-4-2, ± 4 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 3 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ± 1 kV, perf. criteria A
		L to L: EN 61000-4-5, ± 1 kV, perf. criteria A
		L to PE: EN 61000-4-5, ± 2 kV, perf. criteria A
	- Conducted RF Disturbances	EN 61000-4-6, 3 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 1 A/m, perf. criteria A
	- Voltage Dips & Interruptions	230 VAC / 50 Hz: EN 61000-4-11 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 250 periods, perf. criteria B
		115 VAC / 60 Hz: EN 61000-4-11 30%, 30 periods, perf. criteria B >95%, 300 periods, perf. criteria B
	EMC / Environmental	- Certification Documents

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature	-20°C to +70°C
	- Approved Ambient Temp.	+70°C max. (for 50% load) +50°C max. (for 100% load) (for compliance to 62368-1)
	- Storage Temperature	-40°C to +85°C
Power Derating	- High Temperature	2.5 %/K above 50°C
	- Low Input Voltage	Depending on model
	See application note:	www.tracopower.com/overview/txo200
Over Temperature Protection Switch Off	- Protection Mode	95°C min. / 105°C typ. / 115°C max. (Automatic recovery at 60°C typ.)
	- Measurement Point	Internal IC temperature
Cooling System	- Option 1	Forced air cooling (with external fan, 15 CFM)
	- Option 2	Natural convection (20 LFM)
Fan Power Source	- Characteristic	Constant fan speed (continuous)
	- Output Voltage	12 VDC
	- Output Current	300 mA max.
Altitude During Operation		2'000 m max.

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.


Regulator Topology		LLC Converter
Switching Frequency		100 - 260 kHz (PFM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		528 VAC
Isolation Test Voltage	- Input to Output, 60 s	3'000 VAC (4'242 VDC)
Creepage	- Input to Output	5 mm min.
	- Input to Case or PE	5 mm min.
	- Output to Case or PE	0.85 mm min.
Clearance	- Input to Output	3 mm min.
	- Input to Case or PE	3 mm min.
	- Output to Case or PE	0.85 mm min.
Isolation Resistance	- Input to Output, 500 VDC	100 MΩ min.
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	1'630 pF typ. / 1'956 pF max.
Leakage Current (at 264 VAC / 60 Hz)	- Earth Leakage Current	300 μA max.
	- Touch Current	500 μA max.
Distance Through Isolation		0.16 mm
Reliability	- Calculated MTBF	100'000 h (MIL-HDBK-217F, ground benign)
Washing Process		Not allowed
Environment	- Vibration	2.4 g, 3 axis, random waveform, 30 min
	- Mechanical Shock	20 g, 3 axis, half sine, 10 ms, total 6 shocks
Housing Type		Open Frame
Mounting Type		Chassis Mount
Connection Type		Pin Connector
Weight		340 g
Environmental Compliance	- REACH Declaration	www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant
	- RoHS Declaration	www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7(a) (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule.))
	- SCIP Reference Number	e0d3eec3-a4ef-49f3-8a6d-f45a9ef39acc

Additional Information

Supporting Documents	www.tracopower.com/overview/txo200
Frequently Asked Questions	www.tracopower.com/glossary-faq
Glossary	www.tracopower.com/info/glossary.pdf

All specifications valid at 230 VAC, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

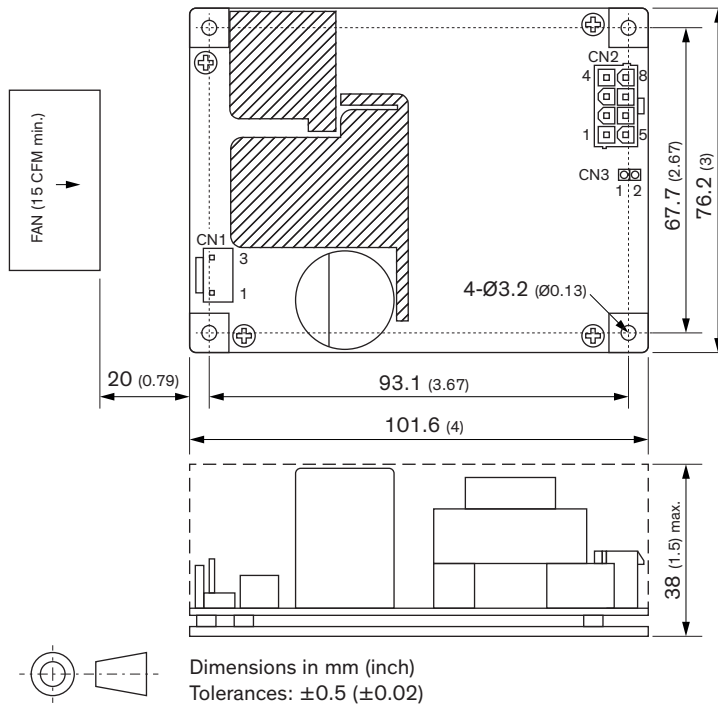

Pin connectors

Input (CN1)		Output (CN2)	
Pin	Function	Pin	Function
1	AC (L)	1,2,5,6	-Vout
3	AC (N)	3,4,7,8	+Vout

AUX (CN3)

Pin	Function	Pin	Function
1	+Fan (12 V)	2	GND

Input: JST series, B3P-VH(LF)(SN), 3.96mm mates with JST crimp terminal: SVH-21T-P1.1 or equivalent and terminal housing: VHR-3N or equivalent

Output: Molex 39-28-1083 Mini-Fit Jr. Vertical Header, 2x4 pins, 4.20mm pitch mating connector: Molex 39-01-2080 or equivalent

AUX: Molex 22-27-2021 Wafer, 2.54 mm pitch mating connector: Molex 22-01-2021 or equivalent