


DATE	REV	ECN	APP'D. BY
02/26/18	A0	--	JC
03/15/18	A1	11208	TLS
06/10/19	A2	11396	TLS
08/12/24	A3	12420	GWL

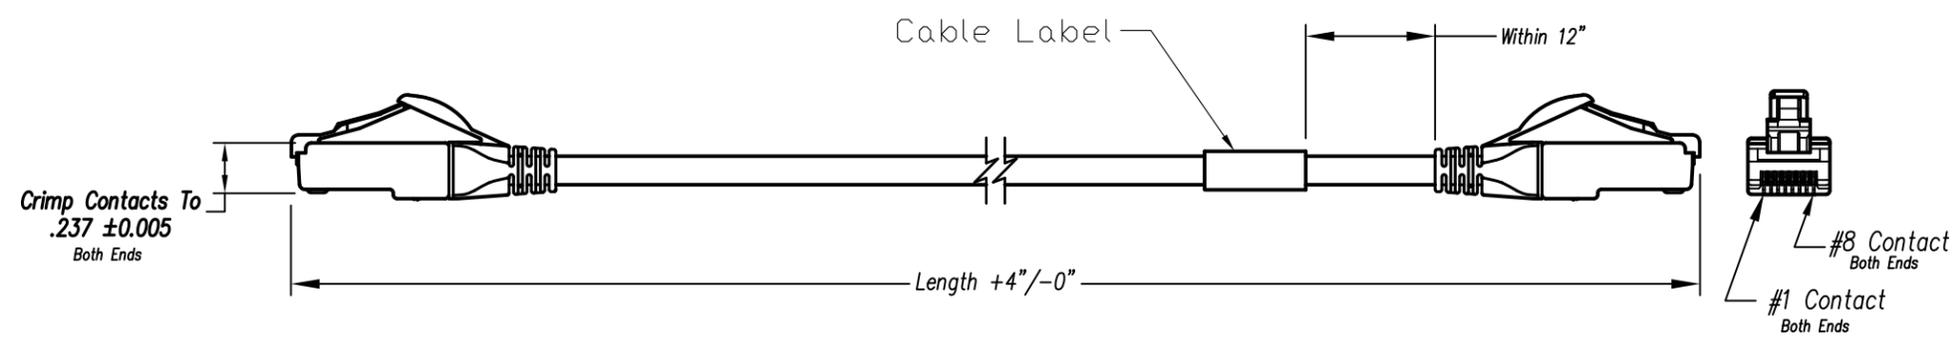

**Notes:**

- 1) Each cable assembly to be individually bagged.
- 2) 50μ" Gold plating on contacts
- 3) Cable Construction:
  - 28AWG Stranded
  - 4Pr, U/UTP, Type CMR
  - PVC Jacket
- 4) Slimline Snagless Strain Relief
- 5) 100% Transmission Tested for Performance

**P/N Structure:**


BM-R6UxxxxY

UOM  
F = Feet  
N = Inches

LENGTH: FEET = xxx, 10FT = 100, 12.5FT = 125, 15FT = 150  
INCHES = xxx, 6IN = 060, 9.5IN = 095, 18IN = 180

Color  
E = Blue  
K = Black  
N = Green  
G = Gray

**Wiring Map: 568B Standard**

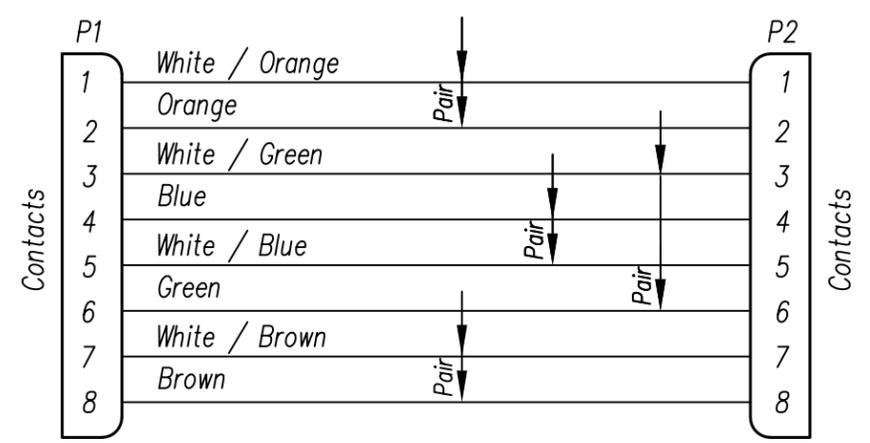

**Example Parts Numbers**

P/N	Feet	
	Color	Length
BM-R6UE001F	Blue	1'
BM-R6UK010F	Black	10'
BM-R6UN015F	Green	15'
BM-R6UE180N	Blue	18"
BM-R6UN095F	Green	9.5"

For Part Numbers Not Shown Follow Part Number Key Format



THIRD ANGLE PROJECTION 		206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 <a href="http://www.belfuse.com">http://www.belfuse.com</a>
DO NOT SCALE DRAWING DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS: INCHES [METRIC] UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°	TITLE: <b>Bel Patchcord Assembly, C6 U/UTP, 28 awg, CMR</b>	
SHEET NO. 1 OF 1	DRN BY: TLS APPD BY: JC DWG NO. CT999173	DATE 02/26/18 DATE 02/26/18 REV. A3

ASSEMBLY FORMAT REV. 6/3/05

B

B

A

A