

# RJ12 Modular Cable Reverse


## Technical Data Sheet

Length	White
7 ft.	CM-170111RBSTK
14 ft.	CM-170112RBSTK
25 ft.	CM-170113RBSTK


## Specifications

- Reverse wiring is generally used for voice application.
- 28AWG (CCA), silver satin jacket
- Terminated with RJ12 (6P6C) plug on both end
- 6 conductor reverse wiring
- pin1 --- pin6 (white)
- pin2 --- pin5 (black)
- pin3 --- pin4 (red)
- pin4 --- pin3 (green)
- pin5 --- pin2 (yellow)
- pin6 --- pin1 (blue)

NOTE: ALL MATERIAL COMPLIANT ROHS STANDARD

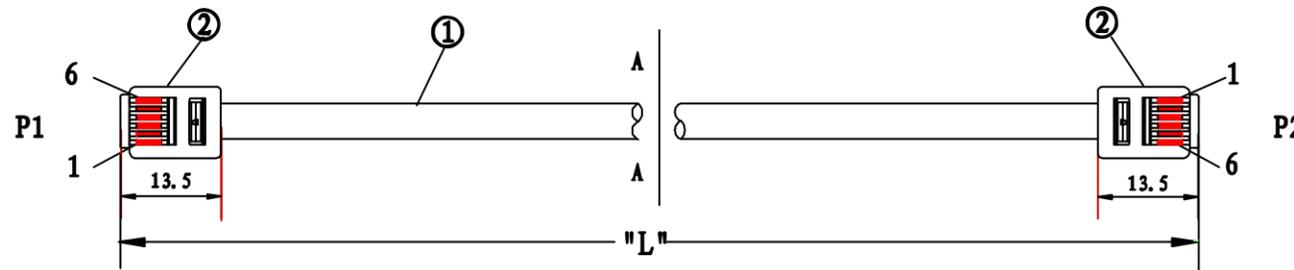


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description

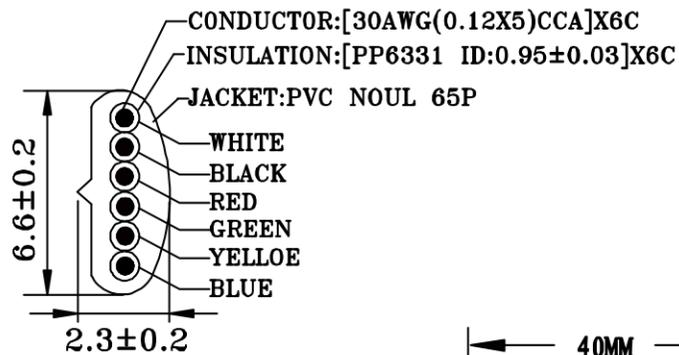

**TERMINATION:**

P1	COLOR	P2
1	WHITE	6
2	BLACK	5
3	RED	4
4	GREEN	3
5	YELLOW	2
6	BLUE	1

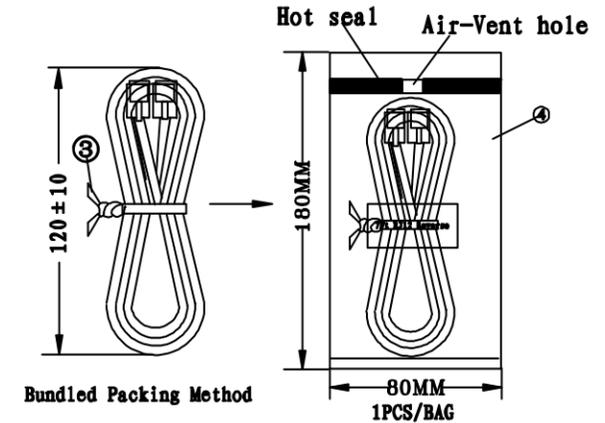

SEC:A-A



LABEL: White color with black marking  
 (Label in the center of PB Bag)

Length	Item #
7ft	CM-170111RBSTK
14ft	CM-170112RBSTK
25ft	CM-170113RBSTK

PART NO	DRAWING NO	CABLE LENGTH "L"	BUYER COLOR	VENDOR COLOR	CUT LENGTH
	217-061-A	(7FT) 2135 ±30 -0		S49-1 light	2140 ~ 2160MM

★NOTE: 100% Electrical Test

1. short, open, miswire test
2. Conduct Resistane: < 5Ω
3. Insulation Resistance: > 5MΩ
4. Dielectric Test : DC 300V

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑤	LABEL	40X15MM White color with black marking	1	PCS
④	PB BAG	180X80MM04	1	PCS
③	CABLE TIE	L=120MM WH	1	PCS
②	PLUG	6P6C FU" Square	2	PCS
①	CABLE		1	PCS

DRAWN BY:	DATE: 2013/12/25	DESCRIPTION: 7Ft RJ12 Reverse
CHECKED BY	SHEET 1 of 1	ITEM NO.
APPROVED BY	SCALE 1:1	REV. A/1

UNIT: mm