

PSR-M-GW-PB-PI - Data interface



1105100

<https://www.phoenixcontact.com/us/products/1105100>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Gateway for connecting a PSR-M base module to a higher-level controller, PROFIBUS DP, TBUS interface, pluggable Push-in terminal block, TBUS connector included

Product description

The configurable and individually scalable PSRmodular safety system is a flexible safety solution for monitoring your machine or system. PSRmodular gateways connect a PSR-M basic module to a higher-level controller. This gateway is designed for use with PROFIBUS.

Your advantages

- Cost-effective safety solution with a high level of adaptability to individual requirements
- Fast startup, thanks to easy hardware and software configuration
- Machine downtimes minimized with comprehensive, easy-to-understand diagnostics
- Low housing width of just 22.6 mm
- Tool-free and time-saving installation thanks to Push-in technology

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1105100 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN02 |
| Product key | DNA365 |
| GTIN | 4055626974989 |
| Weight per piece (including packing) | 165.2 g |
| Weight per piece (excluding packing) | 125 g |
| Customs tariff number | 85371098 |
| Country of origin | IT |

1105100

<https://www.phoenixcontact.com/us/products/1105100>

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Product properties

| | |
|--------------|------------------|
| Product type | Gateways/Proxies |
|--------------|------------------|

Insulation characteristics

| | |
|------------------|----------------|
| Protection class | III (EN 50178) |
|------------------|----------------|

Insulation characteristics

| | |
|----------------------|----|
| Overvoltage category | II |
| Degree of pollution | 2 |

Electrical properties

| | |
|---|---|
| Maximum power dissipation for nominal condition | 1.44 W |
| Nominal operating mode | 100% operating factor |
| Interfaces | DIN rail TBUS for connection to the master module, supplied as standard |
| Rated surge voltage/insulation | Basic insulation 4 kV |

Supply

| | |
|--|---|
| Designation | A1/A2 |
| Rated control circuit supply voltage U_S | 19.2 V DC ... 28.8 V DC |
| Rated control circuit supply voltage U_S | 24 V DC -20 % / +20 % (external fuse, typically 4 A) |
| Rated control supply current I_S | typ. 60 mA |
| Power consumption at U_S | typ. 1.44 W |
| Inrush current | < 2.2 A ($\Delta t = 1$ ms at U_S) |
| Filter time | typ. 5 ms (at A1 in the event of voltage dips at U_S) |
| Protective circuit | Serial protection against polarity reversal Suppressor diode |

Connection data

| | |
|-------------------|--------------------|
| Connection method | Push-in connection |
| Stripping length | 10 mm |

Interfaces

Data: Network interface

| | |
|------------------------|--------------------------|
| Communication protocol | PROFIBUS DP |
| Communication standard | IEC 61158, RS-485 2-wire |
| Connection method | D-SUB-9 female connector |
| Number of connections | 1 |

1105100

<https://www.phoenixcontact.com/us/products/1105100>

| | |
|--------------------|---------|
| Transmission speed | 12 Mbps |
|--------------------|---------|

Data: Service interface

| | |
|-----------------------|------------------|
| Connection method | USB 2.0 Hi-Speed |
| Number of connections | 1 |
| Maximum cable length | 3 m |

Signaling

| | |
|---------------------------|---------------------------------------|
| Status display | 1 x LED (green), 2 x LED (green, red) |
| Operating voltage display | 1 x LED (green) |
| Error indication | 2 x LED (red) |

Dimensions

| | |
|--------|-----------|
| Width | 22.61 mm |
| Height | 107.74 mm |
| Depth | 114.75 mm |

Material specifications

| | |
|------------------|-----------------------------|
| Color (Housing) | gray (RAL 7042) |
| Housing material | Polyamide PA non-reinforced |

Environmental and real-life conditions

Ambient conditions

| | |
|--|--|
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -10 °C ... 55 °C (observe derating) |
| Ambient temperature (storage/transport) | -20 °C ... 85 °C |
| Maximum altitude | ≤ 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 95 % (non-condensing) |
| Max. permissible relative humidity (operation) | 95 % (non-condensing) |
| Shock | 10g for $\Delta t = 16$ ms (continuous shock, 1000 shocks in each space direction) |
| Vibration (operation) | 10 Hz ... 150 Hz, 2g |

Approvals

CE

| | |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

Mounting

| | |
|-------------------|------------------------|
| Mounting type | DIN rail mounting |
| Mounting position | vertical or horizontal |

PSR-M-GW-PB-PI - Data interface




1105100


<https://www.phoenixcontact.com/us/products/1105100>

Drawings

Application drawing

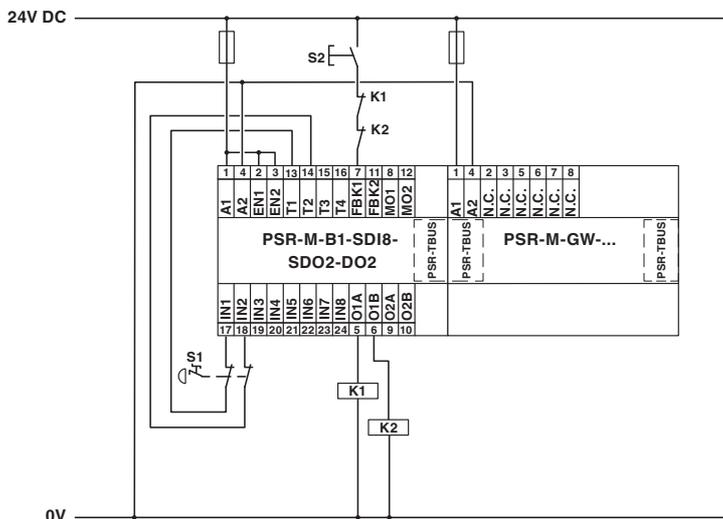

Block diagram

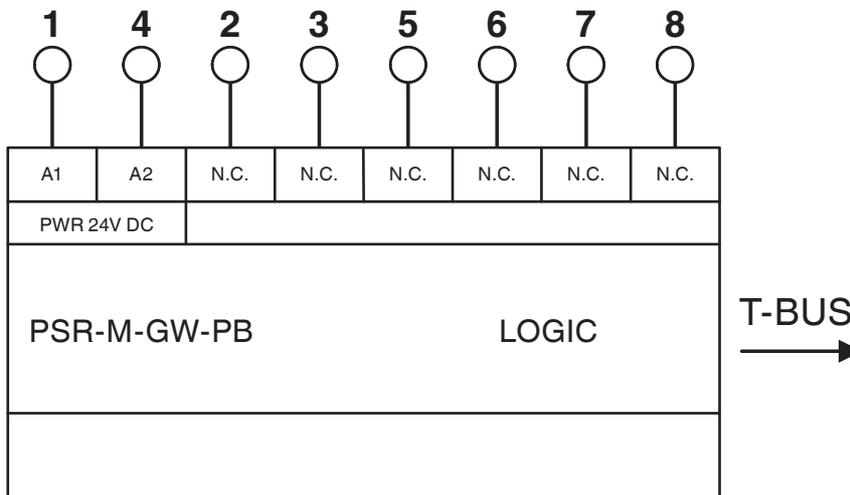

1105100

<https://www.phoenixcontact.com/us/products/1105100>

Approvals

🔗 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1105100>



cULus Listed

Approval ID: E238705



Functional Safety

Approval ID: Z10029429 0013Rev.02

1105100

<https://www.phoenixcontact.com/us/products/1105100>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27242608 |
| ECLASS-15.0 | 27242608 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001604 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 32151600 |
|-------------|----------|

1105100

<https://www.phoenixcontact.com/us/products/1105100>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com