


**TGD ELM-6****Weidmüller Interface GmbH & Co. KG**Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com



Modern machines and plants require load monitoring systems capable of communication. topGUARD - the IO-Link-capable load monitoring system - offers remote control options, full data transparency and reliable protection of the 24-volt system voltage. topGUARD is the ideal complement to IO-Link capable PROtop power supplies from innovative power management systems. It follows the innovative approach to integrated potential distribution, which saves space and time in device installation. A communication module simply needs to be connected and an IODD file integrated in order to carry out parameterisation and control, and to provide all operating data.

**General ordering data**

|            |                            |
|------------|----------------------------|
| Version    | Electronic load monitoring |
| Order No.  | <a href="#">2624980000</a> |
| Type       | TGD ELM-6                  |
| GTIN (EAN) | 4050118689426              |
| Qty.       | 1 items                    |

## TGD ELM-6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Approvals

Approvals



ROHS Conform

UL File Number Search [UL Website](#)

Certificate no. (cULus) E258476

## Dimensions and weights

|            |         |                 |             |
|------------|---------|-----------------|-------------|
| Depth      | 96.5 mm | Depth (inches)  | 3.7992 inch |
| Height     | 125 mm  | Height (inches) | 4.9212 inch |
| Width      | 6.1 mm  | Width (inches)  | 0.2402 inch |
| Net weight | 44 g    |                 |             |

## Temperatures

|                     |                |                       |                |
|---------------------|----------------|-----------------------|----------------|
| Storage temperature | -40 °C...85 °C | Operating temperature | -25 °C...70 °C |
|---------------------|----------------|-----------------------|----------------|

## Environmental Product Compliance

|                        |                                      |
|------------------------|--------------------------------------|
| RoHS Compliance Status | Compliant                            |
| REACH SVHC             | Lead 7439-92-1                       |
| SCIP                   | 925510b1-0d14-47d7-86d9-90447b22ecd3 |

## Input

|                        |              |                                              |          |
|------------------------|--------------|----------------------------------------------|----------|
| Rated input voltage    | 24 V DC      | Input fuse (internal)                        | Yes      |
| DC input voltage range | 18...30 V DC | max. admissible residual ripple at the input | 100 mVpp |

## Output

|                             |         |                           |                          |
|-----------------------------|---------|---------------------------|--------------------------|
| Connection system           | PUSH IN | Capacitive load           | 15,000 µF                |
| Adjustable rated current    | Yes     | Rated current             | 6 A                      |
| Rated current (per channel) | 6 A     | Triggering characteristic | see characteristic curve |

## General data

|                              |                                 |           |
|------------------------------|---------------------------------|-----------|
| Protection degree            | IP20                            |           |
| Surge voltage category       | III                             |           |
| MTTF                         | According to Standard           | SN 29500  |
|                              | Operating time (hours), min.    | 2505000 h |
|                              | Ambient temperature             | 40 °C     |
|                              | Input voltage                   | 24 V      |
|                              | Output power                    | 144 W     |
|                              | Duty cycle                      | 100 %     |
| Conformal coating            | No                              |           |
| Function key                 | Activation time < 3s, Reset, ON |           |
| Relay to activate the output | No                              |           |

## Insulation coordination

|                        |     |
|------------------------|-----|
| Surge voltage category | III |
|------------------------|-----|

## Technical data

### Connection data (output)

|                                           |                     |                                           |                      |
|-------------------------------------------|---------------------|-------------------------------------------|----------------------|
| Connection system                         | PUSH IN             | Number of terminals                       | 2 (+ / -)            |
| Conductor cross-section, AWG/kcmil , max. | 12                  | Conductor cross-section, AWG/kcmil , min. | 26                   |
| Conductor cross-section, flexible , max.  | 2.5 mm <sup>2</sup> | Conductor cross-section, flexible , min.  | 0.14 mm <sup>2</sup> |
| Conductor cross-section, rigid , max.     | 2.5 mm <sup>2</sup> | Conductor cross-section, rigid , min.     | 0.14 mm <sup>2</sup> |
| Screwdriver blade                         | 0.6 x 3.5           |                                           |                      |


### Signalling

|            |                                                                               |         |                                                                                                                         |
|------------|-------------------------------------------------------------------------------|---------|-------------------------------------------------------------------------------------------------------------------------|
| LED green  | Operation (failure-free),<br>Early warning: I Out > 90%<br>I Rated (flashing) | Red LED | Load monitoring has<br>disconnected, Load<br>monitoring has triggered<br>(flashing), Internal error<br>(rapid flashing) |
| Yellow LED | Address is assigned,<br>Address is being assigned<br>(flashing)               |         |                                                                                                                         |

### Classifications


|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC002057    | ETIM 7.0    | EC002057    |
| ETIM 8.0    | EC002057    | ETIM 9.0    | EC001437    |
| ETIM 10.0   | EC001437    | ECLASS 9.0  | 27-37-10-16 |
| ECLASS 9.1  | 27-37-10-16 | ECLASS 10.0 | 27-37-10-16 |
| ECLASS 11.0 | 27-37-10-16 | ECLASS 12.0 | 27-37-10-16 |
| ECLASS 13.0 | 27-37-10-16 | ECLASS 14.0 | 27-37-10-16 |
| ECLASS 15.0 | 27-37-10-16 |             |             |

## Drawings

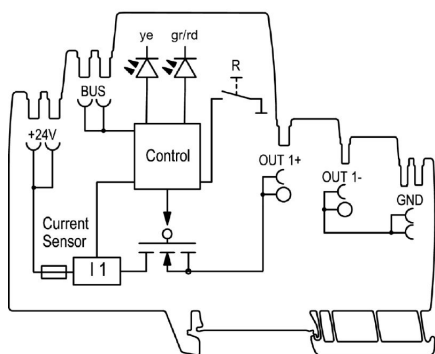


Schematic circuit diagram

Tripping characteristic normal

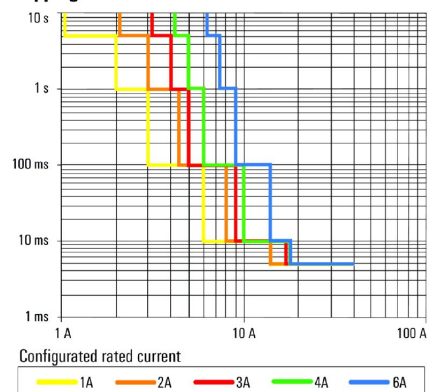

Tripping characteristic

Tripping characteristic lag

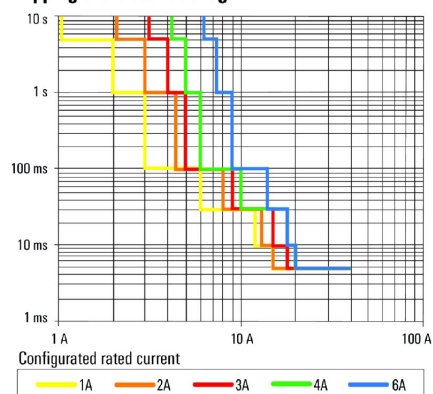

Slow tripping characteristic

## TGD ELM-6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Standard version for machine construction



Efficient machine and facility operation calls for fail-safe and maintenance-friendly control voltage distribution that can be installed in a time and space-saving manner.

With the new maxGUARD system, the terminal blocks (previously installed separately) for distributing potential to the outputs of the electronic load monitors become an integral part of a 24 V DC control voltage distribution system.

The innovative combination of load monitoring and potential distribution saves time during installation, increases safety against failure and reduces the amount of space required on the terminal rail by 50%.

## General ordering data

|            |                            |                       |
|------------|----------------------------|-----------------------|
| Type       | AMG DIS                    | Version               |
| Order No.  | <a href="#">2123050000</a> | Potential distributor |
| GTIN (EAN) | 4050118425413              |                       |
| Qty.       | 10 ST                      |                       |
| Type       | AMG PP                     | Version               |
| Order No.  | <a href="#">2123000000</a> | Partition plate       |
| GTIN (EAN) | 4050118425338              |                       |
| Qty.       | 40 ST                      |                       |
| Type       | AMG PD                     | Version               |
| Order No.  | <a href="#">2122920000</a> | Potential distributor |
| GTIN (EAN) | 4050118425321              |                       |
| Qty.       | 10 ST                      |                       |
| Type       | AMG OD                     | Version               |
| Order No.  | <a href="#">2122910000</a> | Potential distributor |
| GTIN (EAN) | 4050118425185              |                       |
| Qty.       | 10 ST                      |                       |
| Type       | AMG MD                     | Version               |
| Order No.  | <a href="#">2122930000</a> | Potential distributor |
| GTIN (EAN) | 4050118425192              |                       |
| Qty.       | 10 ST                      |                       |

## W-Series



Weidmüller's range of products includes end brackets that guarantee a permanent, reliable mounting on the terminal rail and prevent sliding. Versions with and without screws are available. The end brackets include marking options, also for group markers, and also a test plug holder.

## General ordering data

|            |                            |                                                            |
|------------|----------------------------|------------------------------------------------------------|
| Type       | WEW 35/2 V0 GF SW          | Version                                                    |
| Order No.  | <a href="#">1479000000</a> | End bracket, black, TS 35, V-0, Wemid, Width: 8 mm, 130 °C |
| GTIN (EAN) | 4050118286779              |                                                            |
| Qty.       | 50 ST                      |                                                            |

## TGD ELM-6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26


D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## Standard version for machine construction



Efficient machine and facility operation calls for fail-safe and maintenance-friendly control voltage distribution that can be installed in a time and space-saving manner.


With the new maxGUARD system, the terminal blocks (previously installed separately) for distributing potential to the outputs of the electronic load monitors become an integral part of a 24 V DC control voltage distribution system.

The innovative combination of load monitoring and potential distribution saves time during installation, increases safety against failure and reduces the amount of space required on the terminal rail by 50%.

## General ordering data

|            |                            |                   |
|------------|----------------------------|-------------------|
| Type       | AMG EP 20 10               | Version           |
| Order No.  | <a href="#">2495380000</a> | Fastening element |
| GTIN (EAN) | 4050118505306              |                   |
| Qty.       | 30 ST                      |                   |

## Blank




WS markers are the perfect match for the W-series connectors. Thanks to their system compatibility, the WS tags can also be used with the I-series and the Z-series. The large marking surfaces do not only permit long character strings but also multi-line text. WS markers are ideal for labels with long, customised character strings. Thanks to the proven MultiCard format, printing with PrintJet CONNECT oder/or Plotter is possible.

- Can be fitted in strips or individually
- Markers in proven MultiCard format

For custom printing: Please send us a file of our labeling software M-Print PRO or M-Print PRO Online (without installation) for your labeling specifications.

## General ordering data

|            |                            |                                                                    |
|------------|----------------------------|--------------------------------------------------------------------|
| Type       | WS 10/6 M MC NE WS         | Version                                                            |
| Order No.  | <a href="#">1818400000</a> | WS, Terminal marker, 10 x 6 mm, Pitch in mm (P): 6.00 Weidmueller, |
| GTIN (EAN) | 4032248310876              | Allen-Bradley, white                                               |
| Qty.       | 600 ST                     |                                                                    |

4 mm<sup>2</sup>

The plug-in cross-connections feature easy handling and quick installation. This saves a great deal of time during installation in comparison with screwed solutions.

## TGD ELM-6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

## General ordering data

|            |                            |                                                                      |
|------------|----------------------------|----------------------------------------------------------------------|
| Type       | ZQV 4N/2                   | Version                                                              |
| Order No.  | <a href="#">1527930000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332766              | 2, Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm              |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/2 BL                | Version                                                              |
| Order No.  | <a href="#">1528040000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 2, |
| GTIN (EAN) | 4050118332773              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm                 |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/2 RD                | Version                                                              |
| Order No.  | <a href="#">2460450000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 2,  |
| GTIN (EAN) | 4050118476149              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 9.9 mm                 |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/3                   | Version                                                              |
| Order No.  | <a href="#">1527940000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332865              | 3, Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm               |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/3 BL                | Version                                                              |
| Order No.  | <a href="#">1528080000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 3, |
| GTIN (EAN) | 4050118333008              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm                  |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/3 RD                | Version                                                              |
| Order No.  | <a href="#">2460810000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 3,  |
| GTIN (EAN) | 4050118476231              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 16 mm                  |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/4                   | Version                                                              |
| Order No.  | <a href="#">1527970000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332889              | 4, Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm             |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/4 BL                | Version                                                              |
| Order No.  | <a href="#">1528120000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 4, |
| GTIN (EAN) | 4050118332872              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm                |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/4 RD                | Version                                                              |
| Order No.  | <a href="#">2460800000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 4,  |
| GTIN (EAN) | 4050118476224              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 22.1 mm                |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/5                   | Version                                                              |
| Order No.  | <a href="#">1527980000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332759              | 5, Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm             |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/5 BL                | Version                                                              |
| Order No.  | <a href="#">1528140000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 5, |
| GTIN (EAN) | 4050118333015              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm                |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/5 RD                | Version                                                              |
| Order No.  | <a href="#">2460790000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 5,  |
| GTIN (EAN) | 4050118476217              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 28.2 mm                |
| Qty.       | 60 ST                      |                                                                      |
| Type       | ZQV 4N/6                   | Version                                                              |
| Order No.  | <a href="#">1527990000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:  |
| GTIN (EAN) | 4050118332919              | 6, Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm             |
| Qty.       | 20 ST                      |                                                                      |

## TGD ELM-6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 4N/6 BL                | Version                                                               |
| Order No.  | <a href="#">1528170000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 6,  |
| GTIN (EAN) | 4050118332926              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/6 RD                | Version                                                               |
| Order No.  | <a href="#">2460780000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 6,   |
| GTIN (EAN) | 4050118476200              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 34.3 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/7                   | Version                                                               |
| Order No.  | <a href="#">1528020000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332780              | 7, Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm              |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/7 BL                | Version                                                               |
| Order No.  | <a href="#">1528180000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 7,  |
| GTIN (EAN) | 4050118333114              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/7 RD                | Version                                                               |
| Order No.  | <a href="#">2460770000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 7,   |
| GTIN (EAN) | 4050118476194              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 40.4 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/8                   | Version                                                               |
| Order No.  | <a href="#">1528030000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332841              | 8, Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm              |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/8 BL                | Version                                                               |
| Order No.  | <a href="#">1528190000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 8,  |
| GTIN (EAN) | 4050118332858              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/8 RD                | Version                                                               |
| Order No.  | <a href="#">2460760000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 8,   |
| GTIN (EAN) | 4050118476187              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 46.5 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/9                   | Version                                                               |
| Order No.  | <a href="#">1528070000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332797              | 9, Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm              |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/9 BL                | Version                                                               |
| Order No.  | <a href="#">1528220000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 9,  |
| GTIN (EAN) | 4050118333107              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/9 RD                | Version                                                               |
| Order No.  | <a href="#">2460750000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 9,   |
| GTIN (EAN) | 4050118476170              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 52.6 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/10                  | Version                                                               |
| Order No.  | <a href="#">1528090000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332896              | 10, Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm             |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/10 BL               | Version                                                               |
| Order No.  | <a href="#">1528230000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 10, |
| GTIN (EAN) | 4050118333138              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm                 |
| Qty.       | 20 ST                      |                                                                       |

## TGD ELM-6

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Accessories

|            |                            |                                                                       |
|------------|----------------------------|-----------------------------------------------------------------------|
| Type       | ZQV 4N/10 RD               | Version                                                               |
| Order No.  | <a href="#">2460740000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 10,  |
| GTIN (EAN) | 4050118476163              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 58.7 mm                 |
| Qty.       | 20 ST                      |                                                                       |
| Type       | ZQV 4N/50                  | Version                                                               |
| Order No.  | <a href="#">1528130000</a> | Cross-connector (terminal), Plugged, orange, 32 A, Number of poles:   |
| GTIN (EAN) | 4050118332902              | 50, Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm            |
| Qty.       | 5 ST                       |                                                                       |
| Type       | ZQV 4N/50 BL               | Version                                                               |
| Order No.  | <a href="#">1528240000</a> | Cross-connector (terminal), Plugged, blue, 32 A, Number of poles: 50, |
| GTIN (EAN) | 4050118333121              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm                |
| Qty.       | 5 ST                       |                                                                       |
| Type       | ZQV 4N/50 RD               | Version                                                               |
| Order No.  | <a href="#">2460730000</a> | Cross-connector (terminal), Plugged, red, 32 A, Number of poles: 50,  |
| GTIN (EAN) | 4050118476156              | Pitch in mm (P): 6.10, Insulated: Yes, Width: 303.7 mm                |
| Qty.       | 5 ST                       |                                                                       |

## Slotted screwdriver



VDE insulated screwdriver sets, for working on live parts up to 1000 V AC and 1500 V DC, DIN EN 60900. IEC 900. Each piece is "GS" safety tested. Blade made from fully hardened, high-alloy chromium-vanadium-molybdenum steel, gun-metal finish.

## General ordering data

|            |                            |                            |
|------------|----------------------------|----------------------------|
| Type       | SDIS SL 0.6X3.5X100        | Version                    |
| Order No.  | <a href="#">1274660000</a> | Screwdriver, Mounting tool |
| GTIN (EAN) | 4050118072631              |                            |
| Qty.       | 1 ST                       |                            |