

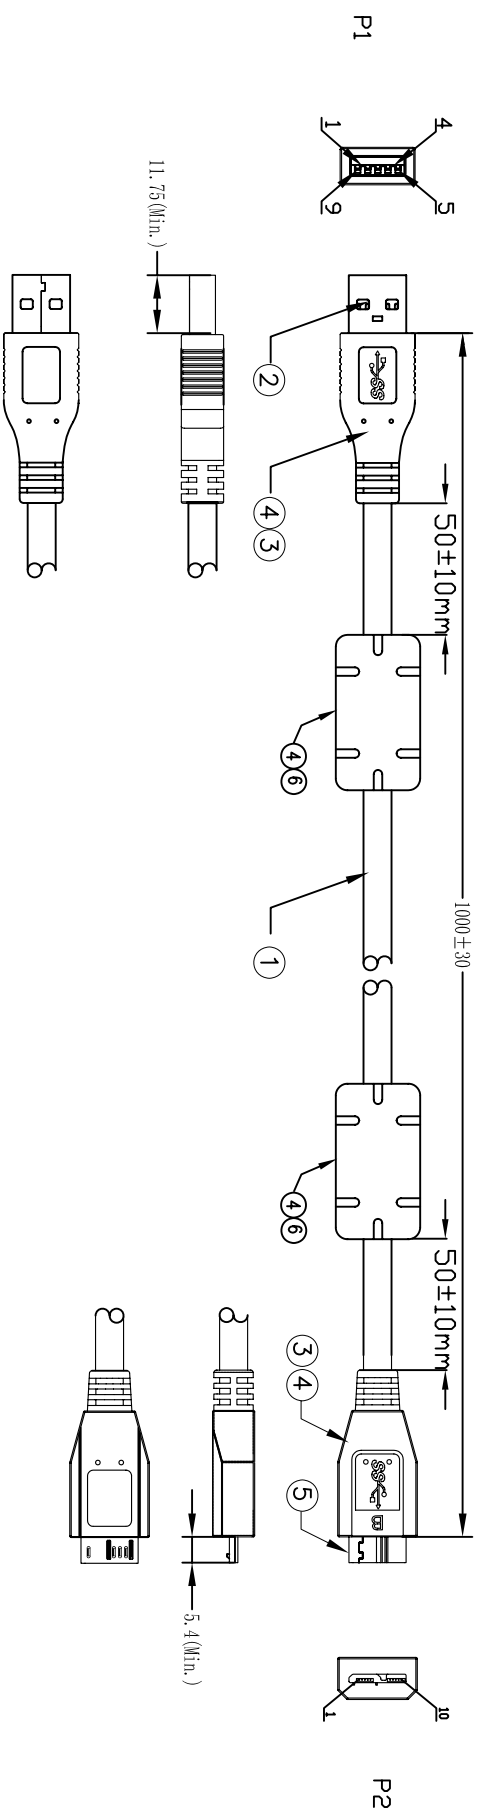


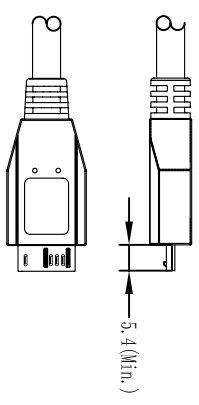

1.Wiring Diagram.

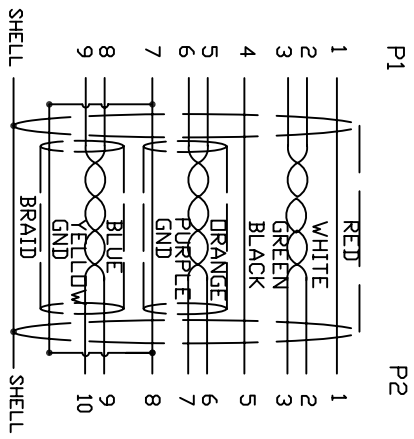

2.Cable test condition :

Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec

3.Each pcs with PE palybag

6	CORE	RH14.2*28.5*6.35mm	2		A 2015123	INITIAL RELEASE	2015/11/24
5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2	REV/ECN#	DESCRIPTION	DATE
4	PVC	45P PVC BLACK OVERMOLD	25g		TITLE		
3	PE	LLDPE 500026 6201	16g		USB3.0 A/M-MICRO B W/FERRITES,1M		
2	CONN	USB3.0 A/M G/F BLUE	1	P1	DWN NO.	103-1092-BL-F0100	REV
1	CABLE	《28AWG (7/0.127T) *1P+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *1P+24AWG(7/0.2T)*2C+A+D+B (1//6/0.12AM) OD5.5 BLACK	1	1000mm	CUSTOMER P/N:		REV
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF	DRAWN	CHECKED	DATE
					EDWIN LAI	WENC	11/24/15
						APPROVAL	
		BILL OF MATERIAL				CUSTOMER:	
						SHEET 1 OF 1	