

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable



1407473

<https://www.phoenixcontact.com/us/products/1407473>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Network cable, Ethernet CAT6<sub>A</sub> (10 Gbps), CC-Link IE CAT6<sub>A</sub> (10 Gbps), 8-position, PUR halogen-free, water blue RAL 5021, shielded (Advanced Shielding Technology), Plug straight M12, coding: X / IP67, on Plug straight RJ45 / IP20, cable length: 5 m

## Commercial data

|                                      |               |
|--------------------------------------|---------------|
| Item number                          | 1407473       |
| Packing unit                         | 1 pc          |
| Minimum order quantity               | 1 pc          |
| Sales key                            | BF04          |
| Product key                          | AF1CMJ        |
| GTIN                                 | 4046356776714 |
| Weight per piece (including packing) | 253.5 g       |
| Weight per piece (excluding packing) | 243.8 g       |
| Customs tariff number                | 85444290      |
| Country of origin                    | US            |

1407473

<https://www.phoenixcontact.com/us/products/1407473>

## Technical data

### Notes

|         |   |
|---------|---|
| General | Further products with variable cable type and variable cable length can be found in the accessories section |
|---------|---|

### Product properties

|                     |                         |
|---------------------|-------------------------|
| Product type        | Data cable preassembled |
| Application         | Standard                |
| Sensor type         | Ethernet                |
| Number of positions | 8                       |
| Shielded            | yes                     |
| Coding              | X                       |

### Interfaces

|                      |  |
|----------------------|--|
| Bus system           | Ethernet   |
| Signal type/category | Ethernet CAT6 <sub>A</sub> , 10 Gbps<br>CC-Link IE CAT6 <sub>A</sub> , 10 Gbps |

### Signaling


|                        |    |
|------------------------|----|
| Status display         | no |
| Status display present | no |

### Electrical properties

|   |                   |
|---|-------------------|
| Nominal voltage $U_N$                   | 48 V AC           |
|   | 60 V DC           |
| Nominal current $I_N$                   | 0.5 A             |
| Transmission medium                     | Copper            |
| Transmission speed                      | 10 Gbps           |
| Transmission characteristics (category) | CAT6 <sub>A</sub> |

### Connector

#### Connection 1

|                     |  |
|---------------------|--|
| Dimensional drawing |  <p>Pin assignment of M12 plug, 8-pos., X-coded, pin side view</p> |
| Type                | M12 Plug, straight, 8-position, shielded (Advanced Shielding Technology), Keying: X  |
| Number of positions | 8  |
| Shielded            | yes  |

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable




1407473

<https://www.phoenixcontact.com/us/products/1407473>

|  |   |
|--|---|
| Shielding                              | Advanced Shielding Technology               |
| Signal type/category                   | Ethernet CAT6 <sub>A</sub> , 10 Gbps        |
|  | CC-Link IE CAT6 <sub>A</sub> , 10 Gbps      |
| Insertion/withdrawal cycles            | ≥ 100                                       |
| Insulation resistance                  | ≥ 100 Ω                                     |
| Overvoltage category                   | II  |
| Degree of pollution                    | 3   |
| Tightening torque                      | 0.4 Nm (M12 connector)                      |
| Material Contact                       | CuZn  |
| Material Contact surface               | Ni/Au                                       |
| Material Contact carrier               | PA 6.6                                      |
| Material Screw connection              | Die-cast zinc, nickel-plated                |
| Material Grip body                     | TPU, hardly inflammable, self-extinguishing |
| Material Seal                          | FKM   |
| Flammability rating according to UL 94 | V0  |
| Degree of protection                   | IP65  |
|  | IP67  |
| Ambient temperature (operation)        | -25 °C ... 85 °C                            |
| Standard designation                   | M12 connector                               |
| Standards/regulations                  | IEC 61076-2-109                             |

## Connection 2

|                             |   |
|-----------------------------|---|
| Dimensional drawing         |  |
|                             | Connector pin assignment plug RJ45  |
| Type                        | RJ45 Plug, straight, 8-position   |
| Number of positions         | 8   |
| Signal type/category        | Ethernet CAT6 <sub>A</sub> , 10 Gbps  |
|                             | CC-Link IE CAT6 <sub>A</sub> , 10 Gbps  |
| Insertion/withdrawal cycles | ≥ 750   |
| Insulation resistance       | ≥ 100 Ω   |
| Overvoltage category        | I   |
| Degree of pollution         | 2   |
| Material Contact            | CuSn  |
| Material Contact surface    | Ni/Au   |
| Material Contact carrier    | PC  |
| Material Housing            | PA  |
| Color (Housing)             | gray  |

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable



1407473

<https://www.phoenixcontact.com/us/products/1407473>

|  |                       |
|--|-----------------------|
| Flammability rating according to UL 94 | V2                    |
| Degree of protection                   | IP20 (RJ45 connector) |
| Ambient temperature (operation)        | -25 °C ... 60 °C      |

## Cable/line

|              |     |
|--------------|-----|
| Cable length | 5 m |
|--------------|-----|

### Ethernet 10 Gbit [94F]

|   |  |
|---|--|
| Dimensional drawing                           |  |
| UL AWM Style                                  | 21238 (80 °C / 600 V)  |
| Number of positions                           | 8  |
| Shielded                                      | yes  |
| Cable type                                    | Ethernet 10 Gbit [94F]   |
| Conductor structure                           | 4x2xAWG26/7; S/FTP   |
| AWG signal line                               | 26   |
| Conductor cross section                       | 4x 2x 0.14 mm <sup>2</sup>   |
| Wire diameter incl. insulation                | 1 mm ±0.05 mm  |
| External cable diameter                       | 6.40 mm ±0.2 mm  |
| Outer sheath, material                        | PUR  |
| External sheath, color                        | water blue RAL 5021  |
| Conductor material                            | Bare Cu litz wires   |
| Material wire insulation                      | Foamed PE  |
| Single wire, color                            | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown         |
| Twisted pairs                                 | 2 cores to the pair  |
| Overall twist                                 | 4 pairs for core   |
| Optical shield covering                       | 70 %   |
| Insulation resistance                         | ≥ 500 MΩ*km  |
| Loop resistance                               | ≤ 290.00 Ω/km  |
| Wave impedance                                | 100 Ω ±5 Ω (at 100 MHz)  |
| Nominal voltage, cable                        | ≤ 100 V  |
| Test voltage Core/Core                        | 2000 V (50 Hz, 1 min.)   |
| Test voltage Core/Shield                      | 2000.00 V (50 Hz, 1 min.)  |
| Minimum bending radius, fixed installation    | 4 x D  |
| Minimum bending radius, flexible installation | 8 x D  |
| Smallest bending radius, fixed installation   | 26 mm  |
| Smallest bending radius, movable installation | 51 mm  |

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable



1407473

<https://www.phoenixcontact.com/us/products/1407473>

|                                 |   |
|---------------------------------|---|
| Halogen-free                    | according to IEC 60754-1                        |
| Flame resistance                | according to IEC 60332-1-2                      |
|                                 | in accordance with UN ECE-R 118.03              |
|                                 | according to CSA C 22.2 No. 210-FT1             |
| Resistance to oil               | in accordance with DIN EN 60811-404             |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)    |
|                                 | -20 °C ... 80 °C (Cable, flexible installation) |

## Environmental and real-life conditions

### Ambient conditions

|                      |                       |
|----------------------|-----------------------|
| Degree of protection | IP65 (M12 connector)  |
|                      | IP67 (M12 connector)  |
|                      | IP20 (RJ45 connector) |

## Standards and regulations

### M12

|                          |                 |
|--------------------------|-----------------|
| Standard designation     | M12 connector   |
| Standards/specifications | IEC 61076-2-109 |

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable




1407473

<https://www.phoenixcontact.com/us/products/1407473>


## Drawings

Dimensional drawing

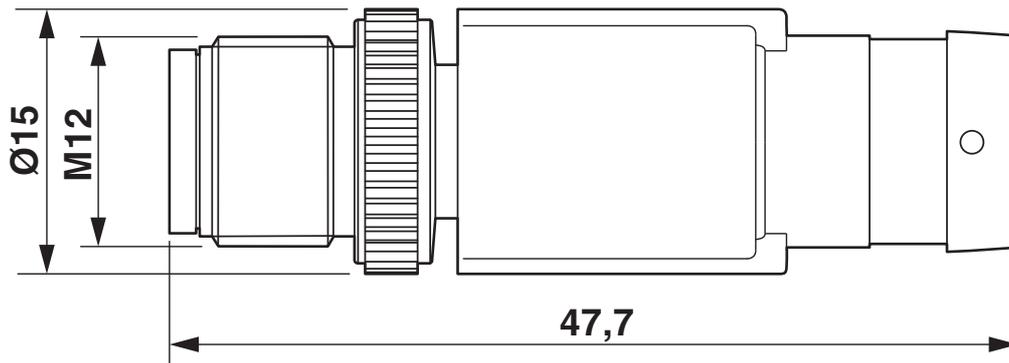

Plug, M12 x 1, straight, shielded


Dimensional drawing

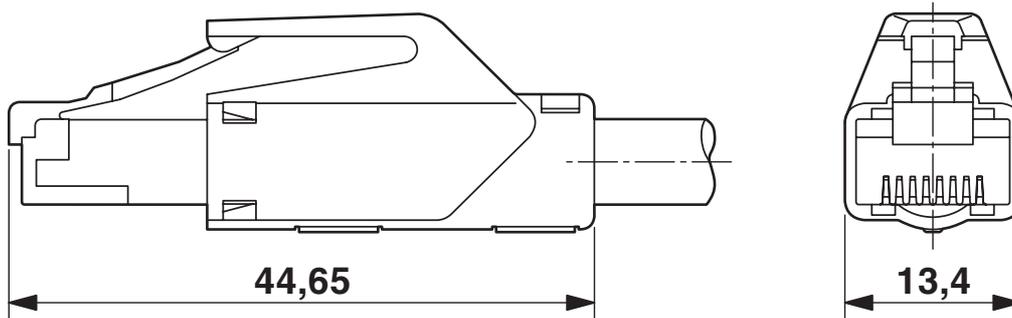

RJ45 connector, IP20


1407473

<https://www.phoenixcontact.com/us/products/1407473>

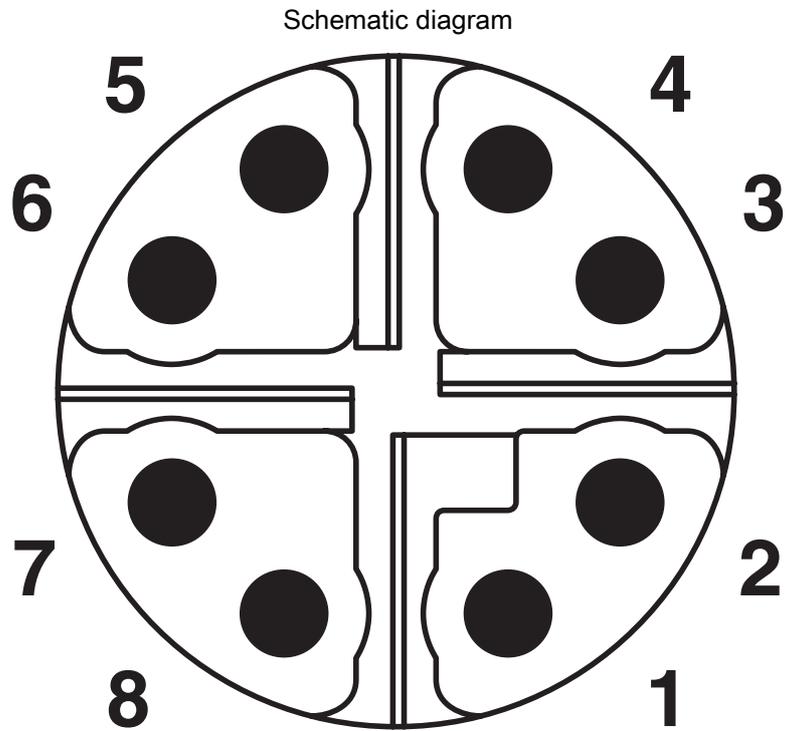

Pin assignment of M12 plug, 8-pos., X-coded, pin side view

Schematic diagram

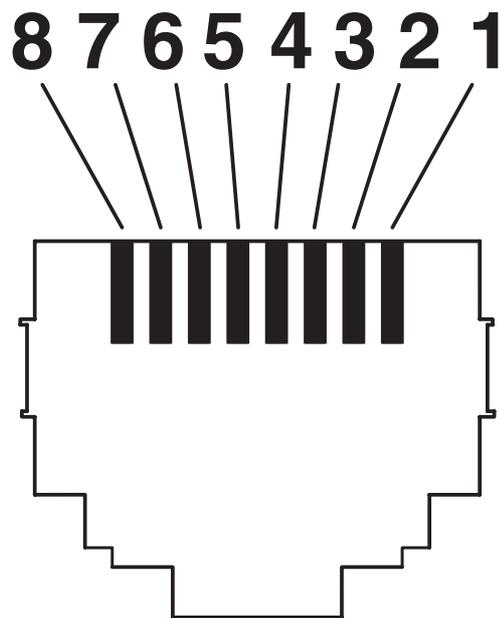


Connector pin assignment plug RJ45

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable

1407473

<https://www.phoenixcontact.com/us/products/1407473>

Circuit diagram

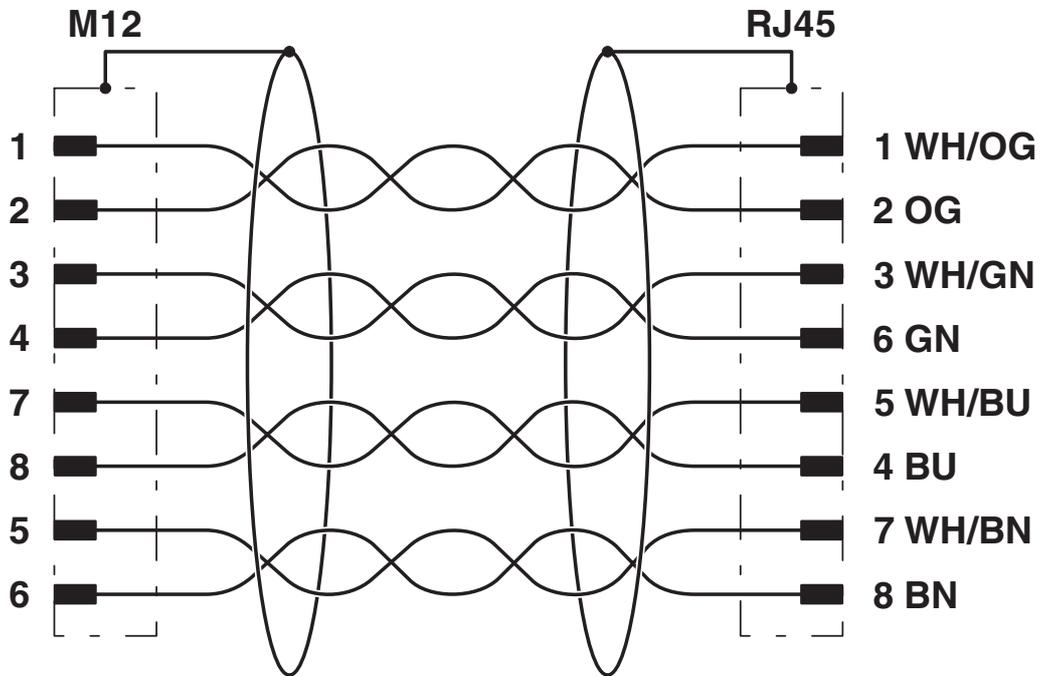

Contact assignment of the M12 and RJ45 plug

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable



1407473

<https://www.phoenixcontact.com/us/products/1407473>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1407473>

|  <b>UL Listed</b><br>Approval ID: FILE E 335024 |                       |                       |                   |                      |
|--|-----------------------|-----------------------|-------------------|----------------------|
|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
| keine  |                       |                       |                   |                      |
|  | 30 V                  | 0.5 A                 | -                 | -                    |

|  <b>cUL Listed</b><br>Approval ID: FILE E 335024 |                       |                       |                   |                      |
|---|-----------------------|-----------------------|-------------------|----------------------|
|   | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $mm^2$ |
| keine   |                       |                       |                   |                      |
|   | 30 V                  | 0.5 A                 | -                 | -                    |

|  <b>EAC-RoHS</b><br>Approval ID: RU D-DE.HB35.B.00387 |  |
|--|--|
|--|--|

# NBC-M12MSX/ 5,0-94F/R4AC - Network cable



1407473

<https://www.phoenixcontact.com/us/products/1407473>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-13.0 | 27060307 |
| ECLASS-15.0 | 27060307 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC001855 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 26121600 |
|-------------|----------|

1407473

<https://www.phoenixcontact.com/us/products/1407473>

## Environmental product compliance

### EU RoHS

|   |                    |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

### China RoHS

|  |  |
|--|--|
| Environment friendly use period (EFUP) | EFUP-E                                   |
|  | No hazardous substances above the limits |

### EU REACH SVHC

|                                     |                            |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

### EF3.0 Climate Change

|         |               |
|---------|---------------|
| CO2e kg | 4.629 kg CO2e |
|---------|---------------|

Phoenix Contact 2025 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)