

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Power cable, 4-position, PUR halogen-free, black-gray RAL 7021, Plug straight M12, coding: T, on Socket straight M12, coding: T, cable length: 2 m, For direct current up to 12 A/63 V

Your advantages

- Easy and safe: 100 % electrically tested plug-in components
- Protection against incorrect connection using special T-coding
- Our standard: robust halogen-free PUR cable

Commercial data

Item number	1408809
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF1
Product key	AF1CCQ
GTIN	4046356838733
Weight per piece (including packing)	206.7 g
Weight per piece (excluding packing)	251.7 g
Customs tariff number	85444290
Country of origin	PL

1408809

<https://www.phoenixcontact.com/in/products/1408809>

Technical data

Product properties

Product type	Power cable
Application	Energy supply
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	T

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Material of grip body	PP
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA
Material for screw connection	Zinc die-cast, nickel-plated

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	63 V DC
Nominal current I_N	12 A

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	> 100
-----------------------------	-------

Connector

Connection 1

Type	Plug straight M12
Coding type	T (Power)

Connection 2

Type	Socket straight M12
Coding type	T (Power)

Cable/line

Cable length	2 m
--------------	-----


PUR halogen-free black [PUR]

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Dimensional drawing	
Cable weight	83 kg/km
UL AWM Style	20549 / 10493 (80°C/300 V)
Number of positions	4
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure, voltage supply	44x 0.20 mm
AWG power supply	16
Conductor cross section	4x 1.5 mm ²
Wire diameter incl. insulation	2.2 mm ±0.05 mm
External cable diameter	6.75 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	brown, white, blue, black
Thickness, insulation	≥ 0.26 mm
Thickness, outer sheath	approx. 0.70 mm
Overall twist	4 wires, twisted
Max. conductor resistance	≤ 14.1 Ω/km (at 20 °C)
Insulation resistance	≥ 1 GΩ*km (at 20 °C)
Nominal voltage, cable	≤ 300 V AC
Test voltage	≥ 3000 V AC (Spark test)
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Smallest bending radius, fixed installation	34 mm
Smallest bending radius, movable installation	68 mm
Dynamic load capacity (bending)	Max. bending cycles: 5000000, Bending radius: 10 x D, Traversing path: 10 m, Traversing rate: 3 m/s, Acceleration: 10 m/s ²
Dynamic load capacity (torsion)	Torsion: ±180 °/m, Torsion cycles: 500000, Torsional frequency: 35 cycles/min.
Halogen-free	in accordance with DIN VDE 0472 part 815 in accordance with DIN EN 50267-2-1
Flame resistance	According to UL 758/1581 (Cable Flame) in accordance with UL 758/1581 FT2 according to DIN EN 60332-2-2

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Resistance to oil	according to DIN EN 60811-404, 168 h at 100 °C
	according to UL 758, 168 h at 60 °C
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10
	Low adhesion
	abrasion-resistant
	Resistant to salt water
Ambient temperature (operation)	-50 °C ... 80 °C (cable, fixed installation)
	-30 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation) (male connector/female connector)	-25 °C ... 85 °C (Plug / socket)

Standards and regulations

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-111

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable




1408809

<https://www.phoenixcontact.com/in/products/1408809>


Drawings

Dimensional drawing

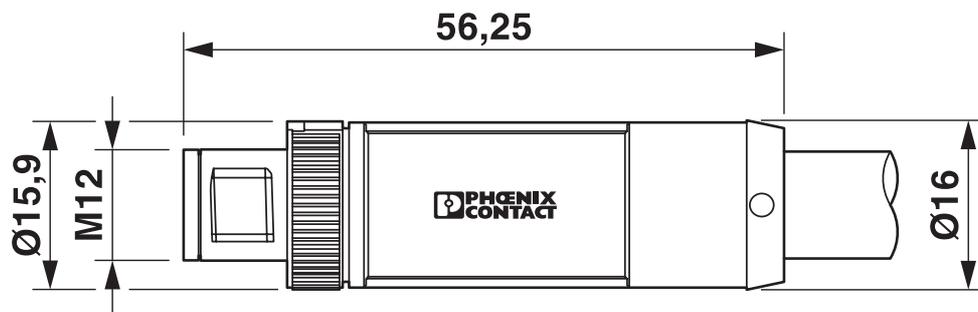


Plug, M12 x 1, straight

Dimensional drawing

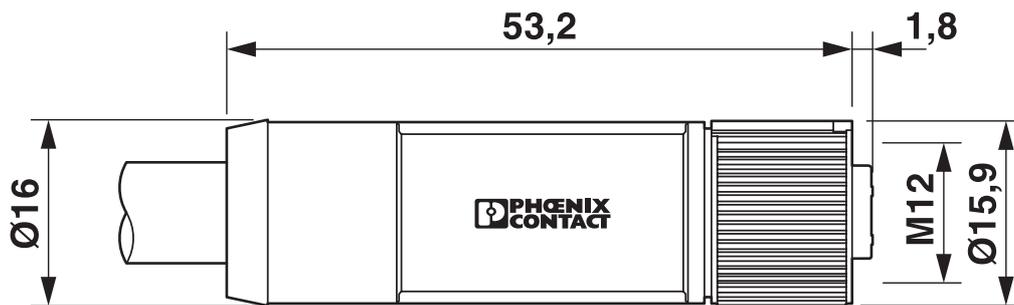


M12 x 1 socket, straight

Schematic diagram

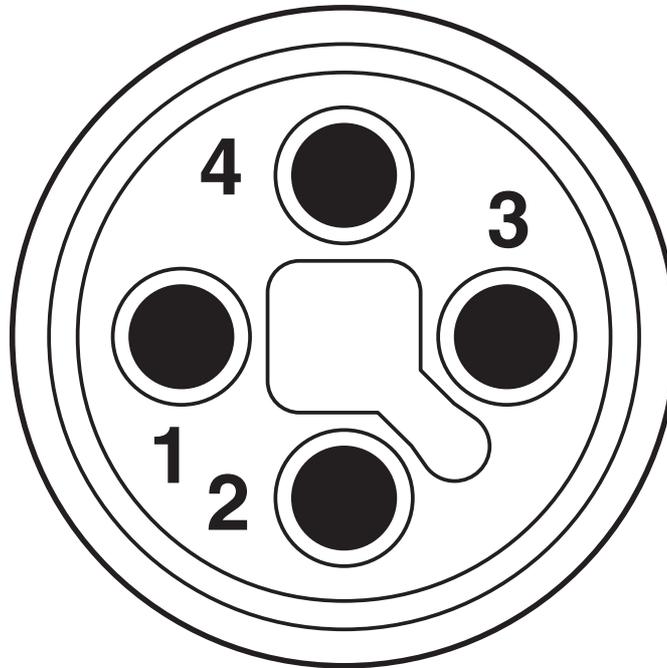


Pin assignment for M12 plug, 4-pos., T-coded, view of plug side

Schematic diagram

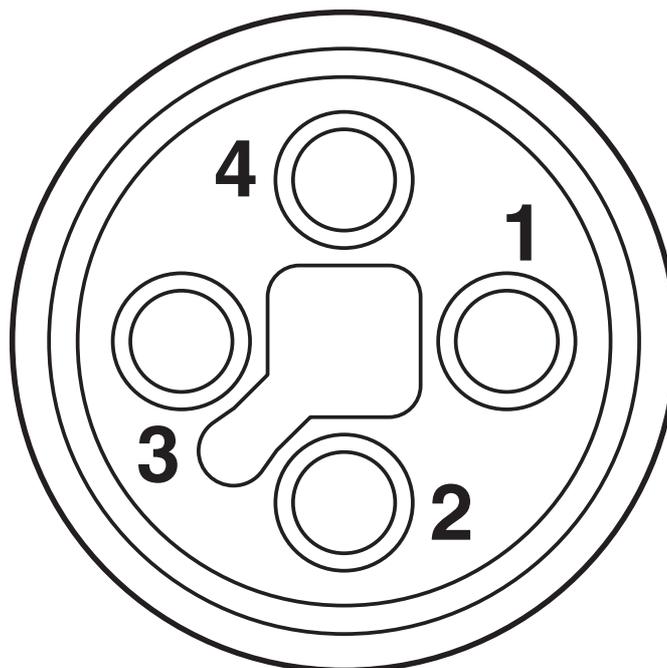


Pin assignment of M12 socket, 4-pos., T-coded, socket side view

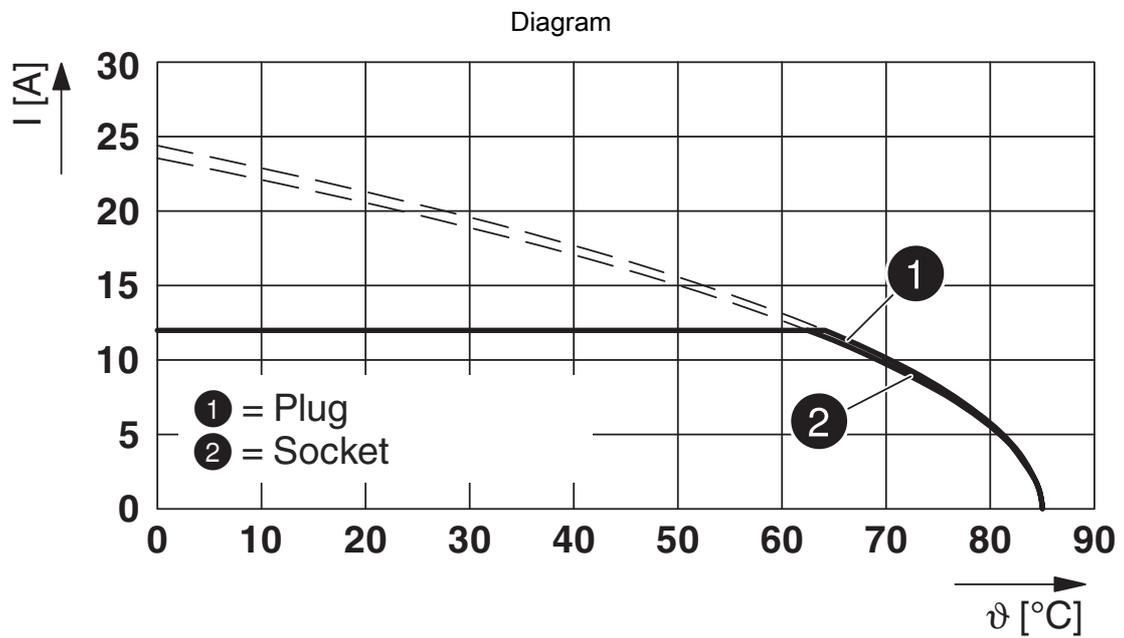

Base curve

Circuit diagram

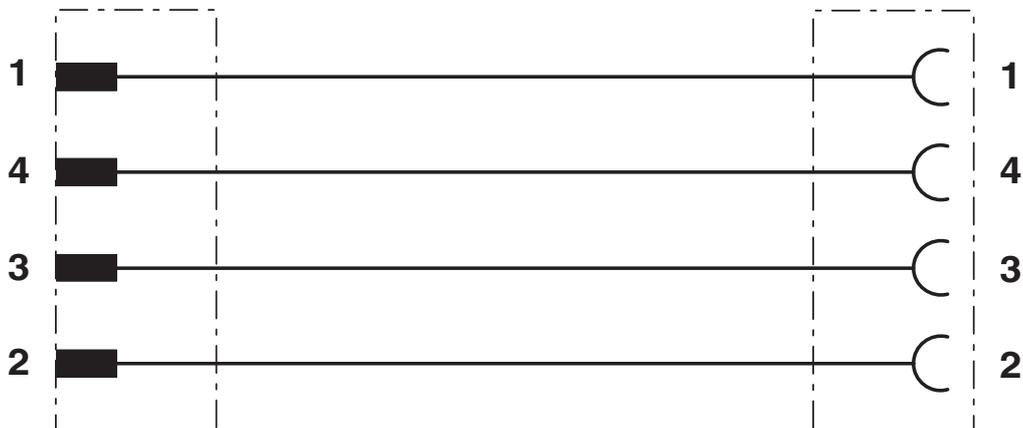

Contact assignment of the M12 connector and the M12 socket

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/1408809>

 UL Listed Approval ID: E468743				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	63 V	12 A	- 16	- 16

 cUL Listed Approval ID: E468743				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
keine				
	63 V	12 A	- 16	-

 EAC-RoHS Approval ID: RU D-DE.HB35.B.00387	
--	--

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Classifications

ECLASS

ECLASS-13.0	27060327
ECLASS-15.0	27060327

ETIM

ETIM 9.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

China RoHS

Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

EF3.0 Climate Change

CO2e kg	4.232 kg CO2e
---------	---------------

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

Accessories

PROT-M12 MS-PA-CHAIN - Screw plug

1430899

<https://www.phoenixcontact.com/in/products/1430899>

M12 sealing cap with fixing band, for sensor cables, for free M12 sockets



UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/in/products/0801453>

Conductor marker, Sheet, white, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME 2.0, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, TOPMARK NEO, TOPMARK LASER, cable diameter range: 1.5 ... 35 mm, mounting type: insert, Number of individual labels: 30, text field height: 4 mm, text field width: 23 mm



SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/in/products/0819411>



Conductor marker, Sheet, white, unmarked, can be labeled with: BLUEMARK E. CARD, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, cable diameter range: 1.5 ... 35 mm, mounting type: insert, Number of individual labels: 24, text field height: 4 mm, text field width: 23 mm

US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/in/products/0828769>



Cable marker, Card, white, unmarked, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, THERMOMARK PRIME 2.0, cable diameter range: 1.5 ... 35 mm, mounting type: slide-on, Number of individual labels: 56, text field height: 4 mm, text field width: 23 mm

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/in/products/0831004>



Cable marker, Roll, white, unmarked, can be labeled with: THERMOMARK E. 300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, cable diameter range: 1.5 ... 35 mm, mounting type: insert, Number of individual labels: 3000, text field height: 4 mm, text field width: 23 mm

PROT-M12 FS-PA-CHAIN - Sealing cap

1430873

<https://www.phoenixcontact.com/in/products/1430873>



M12 sealing cap made of plastic with fixing band, for sensor cables, for free M12 plugs

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

PROT-M12 FS - Sealing cap

1560251

<https://www.phoenixcontact.com/in/products/1560251>



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

SAC BIT M12-D16 - Tool

1200305

<https://www.phoenixcontact.com/in/products/1200305>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, knurl diameter: 16 mm, for 4 mm hexagonal drive

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/in/products/1208429>



Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/in/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

SAC-4P-M12MST/ 2,0-PUR/M12FST - Power cable



1408809

<https://www.phoenixcontact.com/in/products/1408809>

TSD-M SAC-BIT ADAPTER - Adapter insert

1212600

<https://www.phoenixcontact.com/in/products/1212600>



Adapter bit for TSD-M...torque tools, E6.3-1/4" drive with 4 mm hexagon to accommodate SAC bits

B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/in/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in