


NOTE: ALL MATERIAL COMPLIANT REACH STANDARD


REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A/1	19-05-14	B0514B	Remakes Color
A/2	19-07-27	B0722A	Add twist per
A/3	20-04-27	B0427C01	Correcting Cable OD

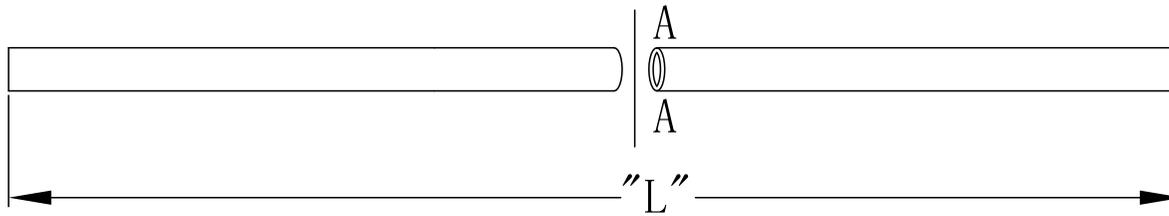

- CONDUCTOR (1) : [28AWG (0.12/7) TINNED COPPER] X1PR
- INSULATION (1) : [PE ID:0.87±0.03] X1PR
- CONDUCTOR (2) : [24AWG (0.2/7) TINNED COPPER] X2C
- INSULATION (2) : [SR-PVC ID:1.08±0.03] X2C
- AL-MYLAR:
- DRAIN WIRE (0.12X7PCS) BARE STRANDED COPPER
- BRAID: (0.12/4/16) TINNED COPPER
- JACKET: PVC UL2725 65P OD:4.7±0.15

PLASTIC

PAPER


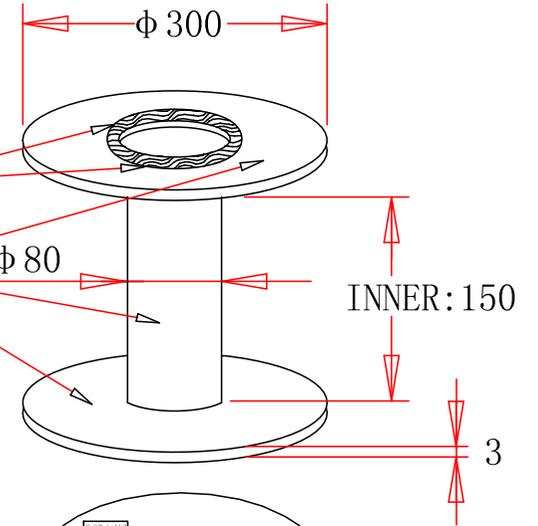


- 1. COLOR: (WHITE, GREEN) X1PR (1PR 15~18mm per twist)
- (RED, BLACK) X2C (1PR+2C 70~80mm per twist)

CABLE WHITE PRINT
E166160 AWM 2725 80°C 30V
28AWGX1P+24AWGX2C USB2.0\

CnC Tech, LLC
2725-2824-BL-01000-T
1 PCS
RoHS
1821

P/N label

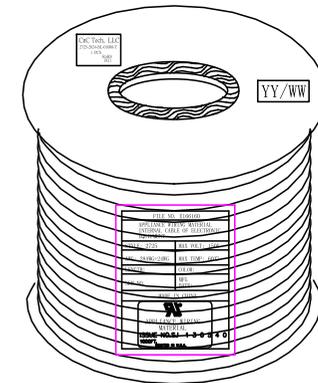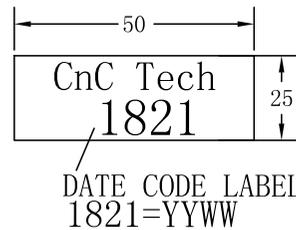

305M/R. "PE"FOAM WRAPPED

Parts number label:50X25mm stick on the reel


PART NO	WIRE LENGTH "L"	CABLE COLOR	INTERNAL COLOR CODE
2725-2824-BL-01000-T	305M/R		BK半雾

CnC Tech, LLC			
Industrial Cable and Connector Technology			
DRAWN BY:	DATE: 2020/04/27	DESCRIPTION: 305M/R UL2725 4C CABLE	
CHECKED BY:	SHEET 1 of 2	ITEM NO. 2725-2824-BL-01000-T	
APPROVED BY:	SCALE 1:1	REV. A/3	UNIT: mm

NOTE: ALL MATERIAL COMPLIANT REACH STANDARD



UL identification code

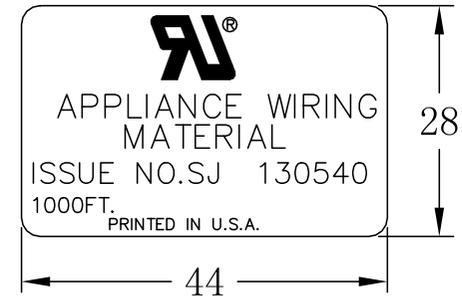

UL LABEL

CnC Tech, LLC

Industrial Cable and Connector Technology

DRAWN BY:	DATE: 2020/04/27	DESCRIPTION: 305M/R UL2725 4C CABLE
CHECKED BY:	SHEET 2 of 2	ITEM NO. 2725-2824-BL-01000-T
APPROVED BY:	SCALE 1:1	REV. A/3 UNIT: mm