

MSDD pass-through USB 3.0 form A, 0.6 m cable, design silver

Art.No.: 4000-73000-0150000

Weight: 0.059

Country of origin: CZ




Model designation: MSDD PT22-S USB3.0 A/A F/M_0.6


Pass-through

1 × USB 3.0 (female/male/0.6 m cable) form A

[Link to Product](#)

Illustration

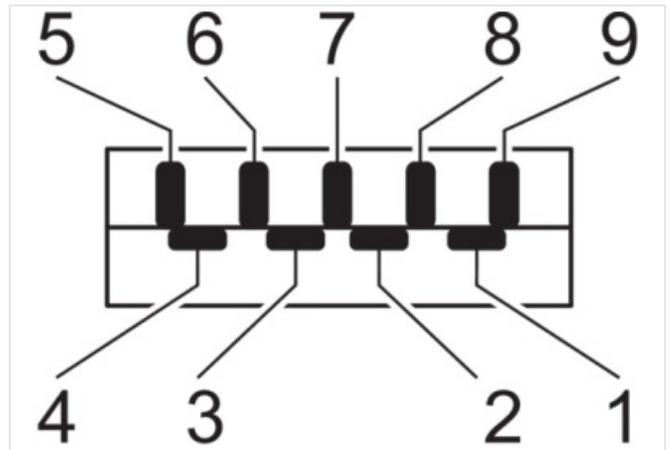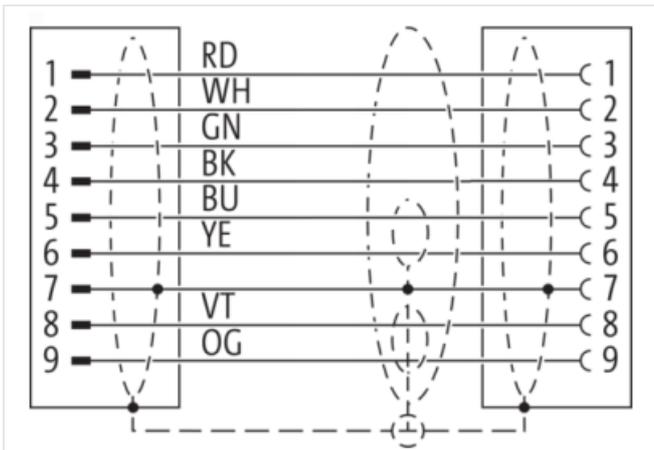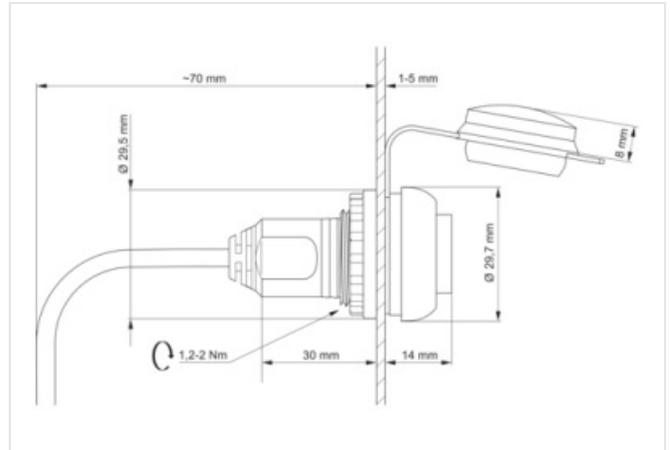

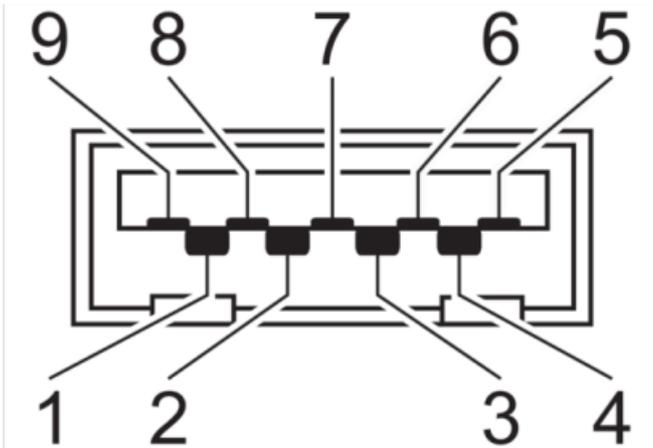

Product may differ from Image

**Header**

Material short text MSDD PT22-S USB3.0 A/A F/M_0.6

Commercial dataURL Webshop <https://shop.murrelektronik.com/4000-73000-0150000>

GTIN 4048879432894

ECLASS-6.0 27143423

ECLASS-6.1 27143419

ECLASS-7.0 27440515

ECLASS-7.1 27440515

ECLASS-8.0 27440515

ECLASS-8.1 27440515

ECLASS-9.0 27440515

ECLASS-9.1 27440515

ECLASS-10.0.1 27440515

ECLASS-10.1 27440515

ECLASS-11.0 27440515

ECLASS-11.1 27440515

ECLASS-12.0 27440515

ECLASS-13.0 27440515

ECLASS-14.0 27440515

ETIM-5.0 EC002625

ETIM-6.0 EC002625

ETIM-7.0 EC002625

ETIM-8.0 EC002625

customs tariff number 85444290

EAN 4048879432894

Packaging unit 1

Electrical data | Supply

Operating voltage AC 5 V

Operating voltage DC 5 V

Operating current max. 900 mA

Industrial Communication

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2025-11-28

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Data transmission rate max.	5.000 Mbit/s
USB specification	3.0
Device protection	
Shielded	Yes
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20, IP65
Protection NEMA	12, 3R, 4x, 4, 13, 2
Additional condition protection degree	in closed state, inserted
Device protection Mechanical	
Mechanical endurance	1.500 cycles
Mechanical data Mounting data	
Depth	30 mm
Diameter	29,5 mm
Mounting depth	70 mm
Diameter cutout	22,5 mm
Approvals	
UL 50E	Yes