


# PX0840/AA/2M00 Datasheet

**Product Name** // Overmoulded USB 2.0 Cable PX0840  
**Series** USB Standard A Plug to Sealed A Plug 2m Cable

 [View Product Page](#)

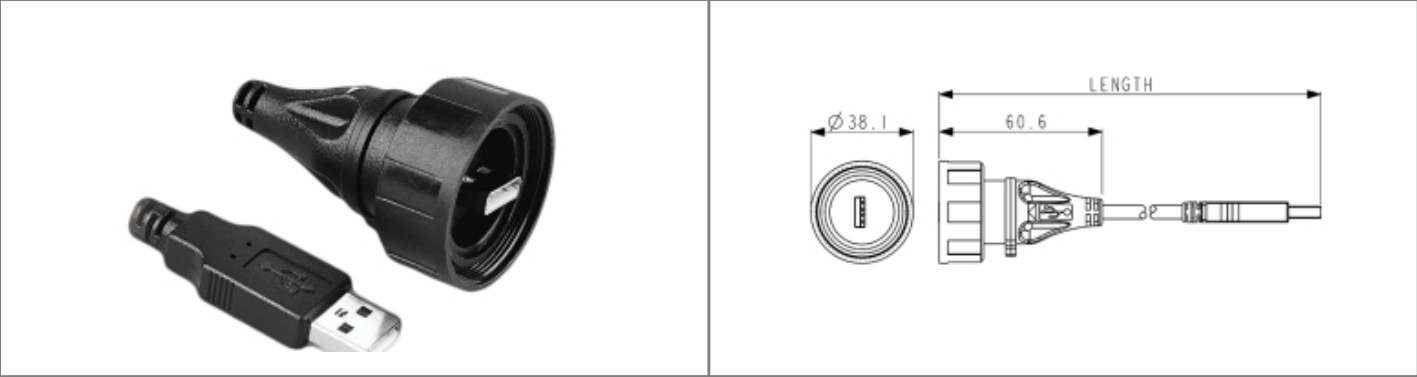

## // Product Description:

- Pre-Wired Overmoulded USB 2.0 Cable
- Water and dustproof to IP68 when mated with compatible connector
- Standard USB 2.0 Type A plug to Sealed Standard USB 2.0 Type A plug
- 2m Cable Length
- PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
- Mate with PX08 Standard USB 2.0 Series Panel Mount Connectors

## // General Information:

|                                 |                                               |
|---------------------------------|-----------------------------------------------|
| Product Display Title:          | Pre-Wired Overmoulded USB 2.0 Cable           |
| Product Family:                 | Circular Data Connectors                      |
| Product Series:                 | Standard Buccaneer - USB                      |
| Body Colour:                    | Black                                         |
| Body Material:                  | PVC                                           |
| Cable Length:                   | 2m                                            |
| Contact Type:                   | Plug Contact                                  |
| Coupling Type:                  | Screw                                         |
| Current Max:                    | 1A                                            |
| Data Cable Type:                | USB 2.0 Standard A Plug to Sealed A Plug      |
| Diameter Over Coupling Ring Mm: | 38.1mm                                        |
| Flamability Rating:             | UL94V-0                                       |
| Function:                       | Flex to Standard Connector Double Ended Cable |
| Ip Rating:                      | IP68, IP69K                                   |
| Max Operating Temperature:      | +70°C                                         |
| Min Operating Temperature:      | 0°C                                           |
| Number Of Contacts:             | 4 Contacts                                    |
| Rohs Compliant:                 | Yes                                           |
| Voltage Max:                    | 5V                                            |

### // Product PDF Links



### // Product 3D CAD Model Links



Have a question or project enquiry  
you'd like to talk to us about?



[Click Here To Contact Us](#)