


PX0841/AB/2M00 Datasheet

Product Name // Overmoulded USB Cable PX0841 Series
USB Sealed A Plug to Sealed B Plug 2M Cable

 [View Product Page](#)

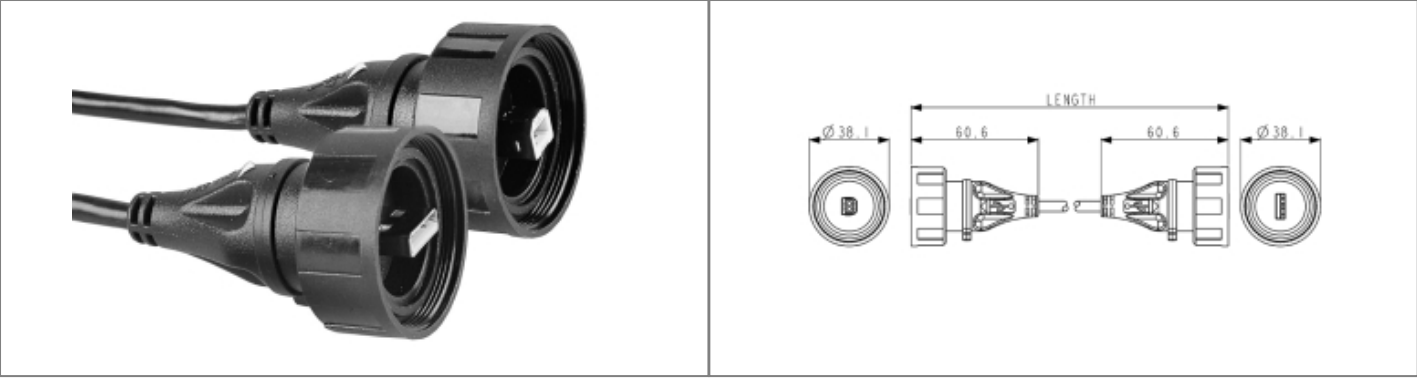

// Product Description:	
 Pre-Wired Overmoulded USB V2.0 Cable	 Choice of cable lengths depending on part code suffix
 Water and dustproof to IP68 when mated with compatible connector	 PX0835 Sealing Cap available separately to maintain IP rating of unmated connectors
 Sealed Standard USB Type A plug to Sealed Standard USB Type B plug	 Mate with PX08 Standard USB Series Panel Mount Connectors

// General Information:	
Product Display Title:	Pre-Wired Overmoulded USB V2.0 Cable
Product Family:	Circular Data Connectors
Product Series:	Standard Buccaneer - USB
Approvals:	CSA, UL, VDE
Body Material:	PVC
Cable Length:	2m
Contact Type:	Plug Contact
Coupling Type:	Screw
Current Max:	1A
Data Cable Type:	USB Sealed A Plug to Sealed B Plug
Diameter Over Coupling Ring Mm:	38.1mm
Flamability Rating:	UL94V-0
Function:	Flex to Flex Connector Double Ended Cable
Ip Rating:	IP68, IP69K
Max Operating Temperature:	+70°C
Min Operating Temperature:	0°C
Number Of Contacts:	4 Contacts
Voltage Max:	30V

// Product PDF Links

 [Standard Series USB connectors...](#)

// Product 3D CAD Model Links

 [PX0841/AB/2M003D CAD Model](#)