


PXP0020/A/1M00/A Datasheet

Product Name // Flex USB A Male to USB A Male Cable
Assembly 1m

 [View Product Page](#)

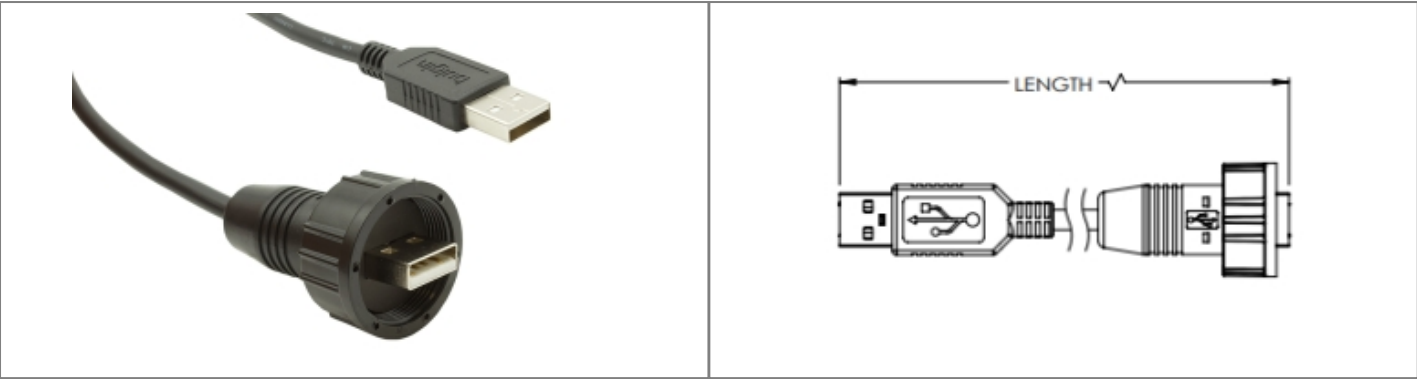

// **Product Description:**

- IP67 Male USB A to Male USB A
 - IP67 when mated
 - Mates with rear panel mount connectors PXP0023, PXM0023
- USB 2.0 Performance
 - Length 1m

// **General Information:**

Product Display Title:	Sealed USB Cable / Single Ended
Product Family:	Circular Data Connectors
Product Series:	20 Series USB
Body Colour:	Black
Body Material:	PVC
Body Material Type:	Plastic Body
Cable Length:	1m
Contact Pin Material:	Copper, Gold plated
Contact Type:	Plug Contact
Coupling Type:	Screw
Data Cable Type:	USB 2.0 Sealed A Plug to Standard A Plug
Diameter Over Coupling Ring Mm:	25.5mm
Durability:	1500
Fixing Nut Material:	Plastic
Flamability Rating:	UL94V-0
Function:	Flex to Standard Connector Double Ended Cable
Ip Rating:	IP67
Max Operating Temperature:	80°C
Min Operating Temperature:	-10°C
Number Of Contacts:	4 Contacts
Panel Cut Out:	20.8mm x 19.4mm
Rohs Compliant:	Yes
Sheath Colour:	Black
Sheath Material:	PVC
Thread Size:	13/16-28UN 2A
Voltage Max:	5V

// **Product PDF Links**

 [20 Series USB Waterproof product...](#)

// **Product 3D CAD Model Links**

 [PXP0020/A/1M00/A3D CAD Model](#)